

# Exam Winter Semester 2022

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents

**Exam Winter Semester 2022** ..... 2

    Additional permitted Aids ..... 2

    Hits ..... 2

    Tasks ..... 2

        Exercise E8 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) ..... 2

        Exercise E12 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) ..... 3

        Exercise E10 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 4

        Exercise E14 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) ..... 5

# Exam Winter Semester 2022

## Additional permitted Aids

- non-programmable calculator,
- formulary (4 one-sided DIN A4 pages)

## Hits

- The duration of the exam is 120 min.
- Attempts to cheat will lead to exclusion and failure of the exam.
- Withdrawal is no longer possible after these exam has been handed out.
- Please write down intermediate calculations and results on the assignment sheet. (when more space is needed also on the reverse side. In this case: Mark it clearly).
- Always use units in the calculation.
- Use a document-proof, non-red pen.
- Sub-tasks, which are independently solvable are marked with: (independent)
- Sub-tasks, which are hard are marked with: (hard)

## Tasks

### Exercise E8 Charging Capacitors

(written test, approx. 16 % of a 60-minute written test, WS2022)


The circuit (with the realisation) is in the picture. For  $t < 0$  the switch  $S_1$  is open and the voltage across the capacitor is again  $0 \text{ V}$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

#### Resolution

Hint: To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

Solution: The internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .

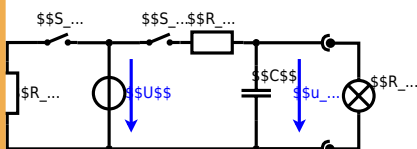

The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ }\Omega$  and a capacitor of  $C = 100 \text{ }\mu\text{F}$ . The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first



**Solution**

A series circuit means that the current is constant on every component. Parallel circuit means that the voltage is the same on every component.

Equivalent impedance for the parallel combination of  $R_3$  and  $X_{L3}$  is:

$$\frac{1}{Z_{eq}} = \frac{1}{R_3} + \frac{1}{X_{L3}} = \frac{1}{R_3} + \frac{1}{j\omega L_3}$$

So it gets messy, that's perpendicular impedances can be simplified for  $\omega = 628.3185 \text{ rad/s}$  (not  $300 \text{ Hz}$ ), since  $R_3$  is  $30 \text{ Ohm}$  and  $X_{L3}$  is  $j40 \text{ Ohm}$ .

Therefore the resulting current of the parallel circuit is given as:

$$I_{3R} = \frac{U}{Z_{eq}} = \frac{U}{\frac{1}{R_3} + \frac{1}{j\omega L_3}}$$

This can be rearranged to get  $Z_{eq}$ :

$$Z_{eq} = \frac{R_3 \cdot j\omega L_3}{R_3 + j\omega L_3}$$

Back to the first formula:

$$I = \frac{U}{R_1 + j\omega L_1 + Z_{eq}}$$

**Exercise E10 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)**

2. Calculate the phase angle and the effective value of the current  $I$  in the circuit. The components ( $R$  and  $X_L$ ) shall be given.

After analysis, the full bridge circuit can be simplified to a single loop circuit in phase.  $Z_{eq} = R + j\omega L = 10 + j20 \text{ Ohm}$

**Solution**

1. Calculation of the effective values of the components.

**Solution**

$$I_{eff} = \frac{U_{eff}}{\sqrt{R^2 + (\omega L)^2}} = \frac{10}{\sqrt{10^2 + (20)^2}} = 0.447 \text{ A}$$

**Solution**

The current  $I$  and voltage  $U$  are in phase since  $Z_{eq}$  is purely real.

resulting  $I_{eff} = 0.447 \text{ A}$  and  $U_{eff} = 10 \text{ V}$ .

Therefore, the component  $R$  is in phase with the voltage  $U$ .

Impedance  $Z_{eq} = R + j\omega L = 10 + j20 \text{ Ohm}$ .


$\varphi = \arctan\left(\frac{\omega L}{R}\right) = \arctan\left(\frac{20}{10}\right) = 63.4^\circ$

With the complex part comes the complex value  $I = 0.447 \angle -63.4^\circ \text{ A}$ .

The phase  $\varphi$  can be calculated as  $\varphi = \arctan\left(\frac{\omega L}{R}\right) = \arctan\left(\frac{20}{10}\right) = 63.4^\circ$ .





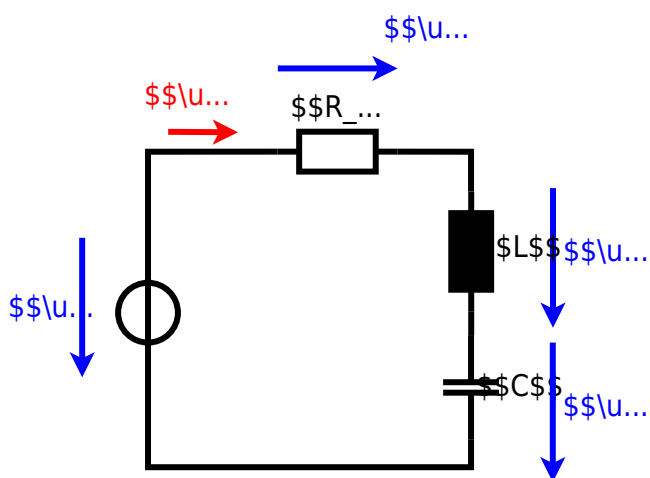

From:  
<https://first.mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link:  
[https://first.mexle.te.hs-heilbronn.de/electrical\\_engineering\\_and\\_electronics\\_2/ws2022\\_exam](https://first.mexle.te.hs-heilbronn.de/electrical_engineering_and_electronics_2/ws2022_exam)

Last update: **2026/04/03 15:54**

