

# Exam Winter Semester 2022

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents

Exercise E5 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) .....	3
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) .....	6
Exercise E9 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) .....	7
Exercise E13 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) .....	7
Exercise E11 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) .....	11
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) .....	11
Exercise E7 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) .....	12
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) .....	13
Exercise E6 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) .....	15
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) .....	19
Exercise E10 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) .....	20
Exercise E14 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) .....	20
Exercise E12 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) .....	24
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) .....	24
Exercise E8 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,	


---

WS2022) .....	25
Exercise E4 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) .....	26

**Exercise E5 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result

$$\begin{aligned} U_{\text{S}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \Omega \end{aligned}$$

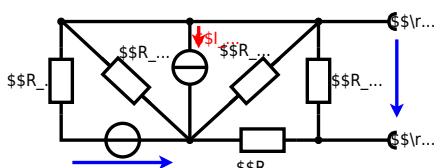


Calculated the internal resistance  $R_{\text{i}}$  and the source voltage  $U_{\text{S}}$  of an equivalent linear voltage source on the connectors  $\text{A}$  and  $\text{B}$ .  
 $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3= 10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$   
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

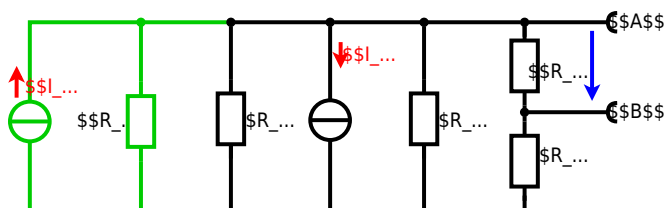

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following:

$$U_{24} = I_{24} \cdot R_{6789}$$

$$U_{24} = U_{23} - I_{24} \cdot R_{135} \quad \text{with } U_{23} = \frac{U_{24}}{R_6 + R_7 + R_1 || R_3 || R_5} \cdot (R_7 + R_1 || R_3 || R_5)$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - I_{24} \cdot R_{135}$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \quad R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022

**Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)**

2. The diagram shows a circuit with a temperature-dependent resistor  $R$  and a constant resistor  $R_0$ . The circuit is connected to a voltage source  $U_0$ . The temperature  $T$  inside the refrigeration system can reach down to  $-40 \text{ }^\circ\text{C}$ . Calculate the resistance of the thermistor at  $-40 \text{ }^\circ\text{C}$ .

Its temperature coefficients are:  $\alpha = 0.01 \text{ } \frac{1}{\text{K}}$  and  $\beta = 71 \cdot 10^{-6} \text{ } \frac{1}{\text{K}^2}$ .

Result: The temperature inside the refrigeration system can reach down to  $-40 \text{ }^\circ\text{C}$ . Calculate the resistance of the thermistor at  $-40 \text{ }^\circ\text{C}$ .

Resistor transfer resistor  $R$  and  $R_0$  are in series. The total resistance is  $R + R_0$ . The current  $I$  is  $I = \frac{U_0}{R + R_0}$ . The power  $P$  is  $P = I^2 \cdot R$ . Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad \text{with } \Delta T = T_{\text{end}} - T_{\text{start}} \quad R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \frac{1}{\text{K}} \cdot (-40 \text{ }^\circ\text{C} - 25 \text{ }^\circ\text{C}) + 71 \cdot 10^{-6} \frac{1}{\text{K}^2} \cdot (-40 \text{ }^\circ\text{C} - 25 \text{ }^\circ\text{C})^2\right)$$

temperature dependent resistance, power, heat, exam ee1 ws2022

### Exercise E9 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage  $\underline{U}$  and the phasor current  $\underline{I}$  in the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given.

After analysis, the following phasor values are to be extracted and given in magnitude and phase:  $|\underline{U}|$  and  $\arg(\underline{U})$  in  $^\circ$  and  $|\underline{I}|$  and  $\arg(\underline{I})$  in  $^\circ$ .

Solution  
.. Calculate the phasor values of the voltage and current.

Solution  
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \text{with } \underline{Z} = R + j\omega L = 50 + j\omega L$$
  
The current and voltage are in phase since the circuit is purely resistive.  
The magnitude of the current is  $I = \frac{U}{|Z|} = \frac{50}{\sqrt{50^2 + (\omega L)^2}}$   
The phase of the current is  $\varphi_I = \varphi_U - \varphi_Z = 0 - \arctan\left(\frac{\omega L}{50}\right)$   
The magnitude of the voltage is  $U = I \cdot |Z| = 50 \cdot \sqrt{1 + \left(\frac{\omega L}{50}\right)^2}$   
The phase of the voltage is  $\varphi_U = \varphi_I + \varphi_Z = \arctan\left(\frac{\omega L}{50}\right)$   
With the complex part comes the complex value  $\underline{U} = U \cdot e^{j\varphi_U}$   
The phase  $\varphi$  can be calculated as  $\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{\omega L}{50}\right)$

complex impedance, exam ee1 ws2022

### Exercise E13 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage  $\underline{U}$  and the phasor current  $\underline{I}$  in the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given. The voltage source  $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$  V is connected to a series combination of an inductor of  $330 \mu\text{H}$  and a capacitor of  $30.22 \mu\text{F}$ , all in series.

Solution  
Result  
.. Draw the circuit diagram of the given circuit. Label all components, voltages, and currents.

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi f = 2\pi \cdot 15 \\
\omega &= 2\pi \cdot 15 = 94.2 \text{ rad/s} \\
\end{align*}
\begin{align*} Z_L &= 2\pi f L = 2\pi \cdot 15 \cdot 330 \cdot 10^{-6} \\
&= 3.16 \text{ } \Omega \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} = \frac{1}{2\pi \cdot 15 \cdot 330 \cdot 10^{-6}} \\
&= 159.15 \text{ } \Omega \\
\end{align*}
\underline{Z} = R + \underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j \\
\cdot \underline{Z}_L - j \cdot \underline{Z}_C \quad \underline{Z} = R + j(\underline{Z}_L - \underline{Z}_C) \quad |\underline{Z}| = \\
\sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2}

```

□□□□□□□□ □510...





complex impedance, exam ee1 ws2022

Exercise E11 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit means that the current is constant on every component. The equivalent impedance for R and L combined is given by... Result: R1 = 1.00 Ohm, R2 = 10.0 Ohm

Solution section containing mathematical derivations and circuit analysis. Includes equations for impedance and current calculations.

complex impedance, exam ee1 ws2022

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element is used to heat the wire... Result: power dissipation P=40 W is necessary. The Nichrome wire has a resistivity of 1.10 \* 10^-6 Ohm m.

Solution section for Exercise E1, including the calculation of resistance R = 10.3 Ohm.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$


resistivity, power, exam ee1 ws2022

**Exercise E7 Charging Capacitors**  
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the algebra) also takes into account the capacitor's initial voltage  $U_c(t_0) = U_c(0) = 0 \text{ V}$ . The voltage across the capacitor is again  $U_c(t_2) = U_c(1 \text{ ms})$  at the moment  $t_2 = 1 \text{ ms}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution**  
Hint: To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

**Solution**  
The ideal voltage source  $U$  is in series with the resistor  $R_1$ . On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .

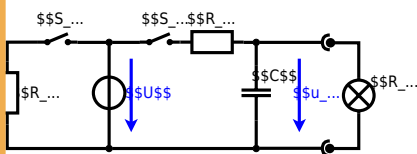


The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ } \Omega$  and a capacitor of  $C = 100 \text{ } \mu\text{F}$ .

The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first asks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0 \text{ V}$ .

- .. First do not consider the light bulb - it is not connected to the RC circuit.
- Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

Solution

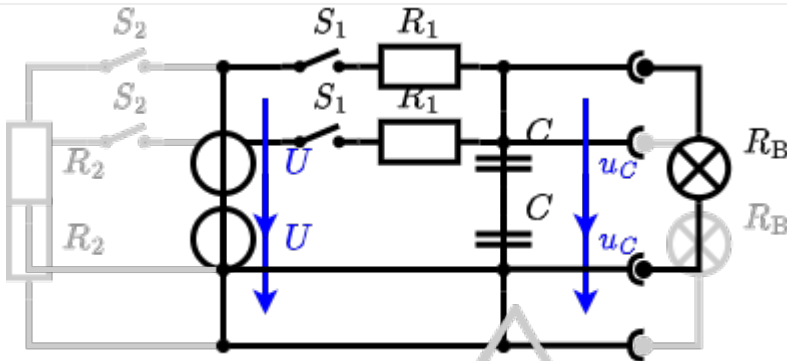

So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_C(t)$  which has to be  $u_C(t_1) = 0.5 \cdot U$ :  

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5$   

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with  $U$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$   
 The internal resistance is given by substituting the ideal voltage source with its resistance ( $R_i = 0 \Omega$ , short-circuit).  
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms} / (10 \Omega \cdot 100 \mu\text{F})})$$

charging capacitors, dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022


**Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall be solved at the  $R_1 = 10 \Omega$  and the voltage  $u_C$  across the capacitor  $C$  shall be determined.

Solution

$$R_{\text{eq}} = 133.8 \, \Omega$$

Now a wye-delta transformation is necessary.

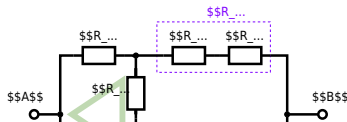

Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

.. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution

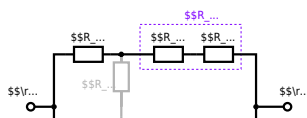

The equivalent resistor is given by a parallel configuration of resistors in series:


$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

[network simplification, exam ee1 ws2022](#)

**Exercise E6 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

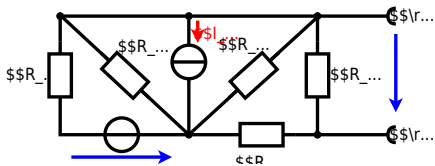


Calculate the internal resistance  $R_{in}$  and the source voltage  $U_{s}$  of an equivalent linear voltage source on the connectors  $A$  and  $B$ .  
 $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3= 10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  
 $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$  Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

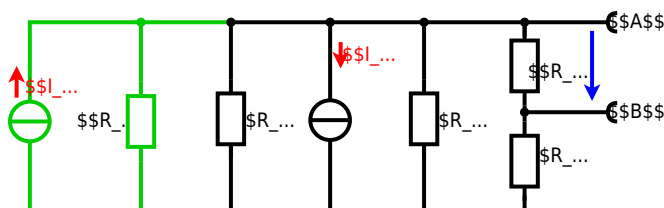

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ : 
$$R_{135} = R_1 || R_3 || R_5$$
 
$$I_{24} = I_2 - I_4 = \frac{U_{24}}{R_1} - I_4$$
 The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following: 
$$U_{24}$$

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left( \frac{U_2}{R_1} - I_4 \right) \cdot R_1 || R_3 || R_5$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \left( \frac{6.0 \text{ V}}{5.0 \Omega} \right) - 4.2 \Omega \cdot \left( \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022

**Exercise E2 Temperature-dependent Resistance**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. The diagram shows a circuit with a temperature-sensitive resistor. The resistor has a resistance of  $10 \text{ k}\Omega$  at  $25^\circ\text{C}$ . Your answer.

Its temperature coefficients are:  $\alpha = 0.01 \frac{1}{\text{K}}$  and  $\beta = 71 \cdot 10^{-6} \frac{1}{\text{K}^2}$

The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

$$R = 10 \text{ k}\Omega \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Resistor transfer resistor  $R$  and  $U$  of the circuit and  $U$  and  $R$  to heat. Therefore, a solution is to use a heat sink up the refrigeration system.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with  $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \text{ k}\Omega \cdot \left( 1 + 0.01 \frac{1}{\text{K}} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \frac{1}{\text{K}^2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

temperature dependent resistance, power, heat, exam ee1 ws2022

### Exercise E10 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage  $\underline{u}$  and the phasor current  $\underline{i}$  in the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given.

After analysis, the following phasors can be determined:  $\underline{u} = 4.68 \angle -90^\circ \text{ V}$  and  $\underline{i} = 0.24 \angle 0^\circ \text{ A}$ .  
Solution

1. Calculation of the physical values of the components.  
Solution  $R = 10 \Omega$ ,  $X_L = 20 \Omega$ ,  $X_C = 10 \Omega$

Solution  
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ \text{ V}}{200 \angle 90^\circ \Omega} = 0.24 \angle -90^\circ \text{ A}$$
  
The current and voltage are in phase since the circuit is purely resistive.  
The voltage across the capacitor is  $\underline{u}_C = \underline{i} \cdot X_C = 0.24 \angle -90^\circ \text{ A} \cdot 10 \angle 90^\circ \Omega = 2.4 \angle 0^\circ \text{ V}$   
The voltage across the inductor is  $\underline{u}_L = \underline{i} \cdot X_L = 0.24 \angle -90^\circ \text{ A} \cdot 20 \angle 90^\circ \Omega = 4.8 \angle 0^\circ \text{ V}$   
The total voltage is  $\underline{u} = \underline{u}_C + \underline{u}_L = 2.4 \angle 0^\circ \text{ V} + 4.8 \angle 0^\circ \text{ V} = 7.2 \angle 0^\circ \text{ V}$   
The phase angle  $\varphi$  can be calculated as  $\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{10}{20}\right) = 26.56^\circ$   
With the complex power  $S = P + jQ$ , we get  $S = 1.2 \text{ W} + j2.4 \text{ var}$   
The power factor  $\cos(\varphi) = 0.87$  can be calculated as  $\cos(\varphi) = \frac{P}{|S|} = \frac{1.2}{1.37}$

complex impedance, exam ee1 ws2022

### Exercise E14 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage  $\underline{u}$  and the phasor current  $\underline{i}$  in the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given. The voltage source is  $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t) \text{ V}$ .  
Solution

This linear source is connected with an inductor of  $330 \mu\text{H}$  and a capacitor of  $30.22 \mu\text{F}$ , all in series.  
Result  
1. Draw the circuit diagram of the given circuit.  
Label all components, voltages, and currents.

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi \cdot 15 \\
\omega &= 2\pi \cdot 15 \cdot 10^{-3} = 94.2 \text{ rad/s} \\
\begin{align*} I &= \frac{U}{Z} = \frac{10 \text{ V}}{\sqrt{R^2 + (X_L - X_C)^2}} \\
&= \frac{10}{\sqrt{30^2 + (19.28 - 10)^2}} \\
&= 0.33 \text{ A} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot 15 \cdot 10^{-3} \cdot 330 \cdot 10^{-6}} \\
&= 292.7 \text{ } \Omega \\
\end{align*}
\underline{Z} = R + j\underline{Z}_L - j\underline{Z}_C \\
= 30 + j19.28 - j10 = 30 + j9.28 \text{ } \Omega \\
|Z| = \sqrt{30^2 + 9.28^2} = 31.5 \text{ } \Omega
\end{align*}

```

□□□□□□□□ □510...





complex impedance, exam ee1 ws2022

**Exercise E12 Impedances at different Frequencies**  
 (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit contains a resistor with  $R_1 = 1.00 \text{ k}\Omega$  and a capacitor with  $C_1 = 40 \text{ nF}$ . A voltage source  $U = 10 \text{ V}$  is connected in series with the resistor and the capacitor. Calculate the absolute value of the impedance  $|Z|$  at  $f = 4 \text{ MHz}$ .

**Solution**

$|Z| = \sqrt{R^2 + X_C^2}$

$|Z| = \sqrt{(1.00 \text{ k}\Omega)^2 + (10 \text{ V} / (2\pi \cdot 4 \text{ MHz} \cdot 40 \text{ nF}))^2}$

$|Z| = 10.0 \text{ }\Omega$

A series circuit means that the current is constant on every component.  
 The equivalent impedance for  $R$  and  $L$  combined is given by  $Z = R + jX_L$   
 Parallel circuit means that the voltage is the same on  $R_1$  and  $C_2$   
 $\frac{1}{Z} = \frac{1}{R_2} + \frac{1}{jX_{C1}}$   
 $Z = \frac{R_2 \cdot jX_{C1}}{R_2 + jX_{C1}}$   
 $Z = \frac{R_2 \cdot jX_{C1} \cdot (R_2 - jX_{C1})}{R_2^2 - (X_{C1})^2}$   
 $Z = \frac{jR_2 X_{C1} (R_2 - jX_{C1})}{R_2^2 - (X_{C1})^2}$   
 $Z = \frac{jR_2 X_{C1} R_2 - jR_2 X_{C1}^2}{R_2^2 - (X_{C1})^2}$   
 $Z = \frac{jR_2^2 X_{C1} - jR_2 X_{C1}^2}{R_2^2 - (X_{C1})^2}$   
 $Z = \frac{jR_2 X_{C1} (R_2 - X_{C1})}{R_2^2 - (X_{C1})^2}$   
 $Z = \frac{jR_2 X_{C1} (R_2 - X_{C1})}{(R_2 - X_{C1})(R_2 + X_{C1})}$   
 $Z = \frac{jR_2 X_{C1}}{R_2 + X_{C1}}$   
 $|Z| = \frac{R_2 X_{C1}}{\sqrt{R_2^2 + X_{C1}^2}}$   
 $|Z| = \frac{1.00 \text{ k}\Omega \cdot 10 \text{ V}}{\sqrt{(1.00 \text{ k}\Omega)^2 + (10 \text{ V} / (2\pi \cdot 4 \text{ MHz} \cdot 40 \text{ nF}))^2}}$   
 $|Z| = 10.0 \text{ }\Omega$

complex impedance, exam ee1 ws2022

**Exercise E1 Resistance of a Wire by Resistivity**  
 (written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of nichrome wire with a diameter of  $d = 0.357 \text{ mm}$  and a length of  $l = 3.57 \text{ m}$  is used for heating. The power dissipation (heat flow) of  $P = 40 \text{ W}$  is necessary. Calculate the resistance  $R$  of the heating element.

**Solution**

$R = \frac{U^2}{P}$

$R = \frac{(10 \text{ V})^2}{40 \text{ W}}$

$R = 2.5 \text{ }\Omega$

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$


resistivity, power, exam ee1 ws2022

**Exercise E8 Charging Capacitors**  
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance  $r$  of the battery. The voltage across the capacitor is again  $U_c(t_0) = 0 \text{ V}$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution**  
Hint: To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $r$ .

**Solution**  
The ideal voltage source  $U$  is in series with the internal resistance  $r$  and the resistor  $R_1$ . The voltage across the capacitor is  $u_c(t) = U \cdot (1 - e^{-t/\tau})$ , where  $\tau = (R_1 + r) \cdot C$ .  
On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .

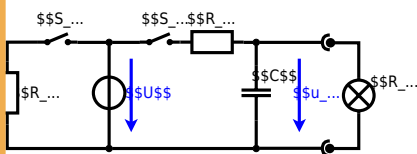


The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ } \Omega$  and a capacitor of  $C = 100 \text{ } \mu\text{F}$ .

The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first asks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0 \text{ V}$ .

- .. First do not consider the light bulb - it is not connected to the RC circuit.
- Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

Solution

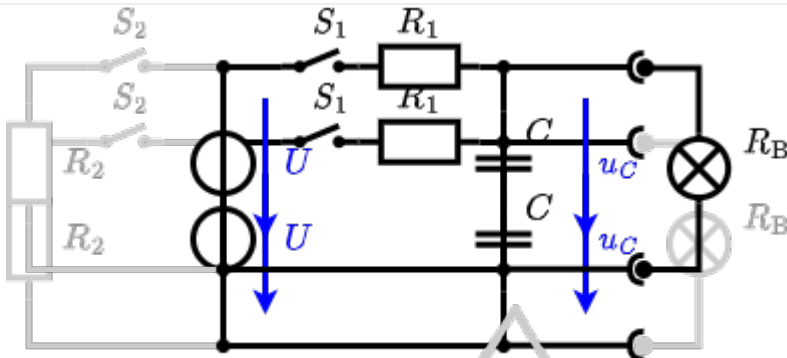

So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_C(t)$  which has to be  $u_C(t_1) = 0.5 \cdot U$ :  

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5$   

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with  $U$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$   
 The internal resistance is given by substituting the ideal voltage source with its resistance ( $R_i = 0 \Omega$ , short-circuit).  
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms}/(10 \Omega \cdot 100 \mu\text{F})})$$

charging capacitors, dc network analysis, pure resistor network simplification, delta wye transformation, exam ee1 ws2022


**Exercise E4 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall be solved at the  $R_1 = 10 \Omega$  and the voltage  $u_C$  across  $R_B$ .

Solution

$$R_{\text{eq}} = 133.8 \, \Omega$$

Now a wye-delta transformation is necessary.

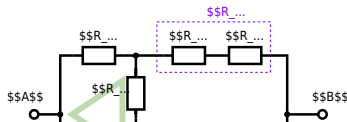

Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

.. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution

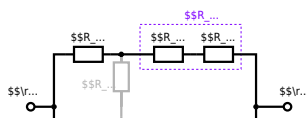

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel (500 \Omega) \parallel (200 \Omega)$$

$$R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega}$$

network simplification, exam ee1 ws2022

From: <https://first.mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link: [https://first.mexle.te.hs-heilbronn.de/electrical\\_engineering\\_1/ws2022\\_exam?rev=1676177525](https://first.mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1676177525)

Last update: 2023/02/12 05:52

