

# task\_5u1zbroaz75w39jk\_with\_calculation

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents

Exercise E1 Electrostatics I (written test, approx. 10 % of a 120-minute written test, SS2024)	2
--	---

electrostatic, field lines, exam ee2 SS2024

**Exercise E1 Electrostatics I**

(written test, approx. 10 % of a 120-minute written test, SS2024)

2. What has been given to you? The charges are  $q_1 = 1 \text{ nC}$ ,  $q_2 = 2 \text{ nC}$ ,  $q_0 = 1 \text{ nC}$ ,  $q_4 = 1 \text{ nC}$ . The value of the point charge  $q_0$  is  $1 \text{ nC}$ . Which value needs  $E_4$  to have to get a resulting force of  $0 \text{ N}$  on  $q_0$ ?

Path:  $q_0 = 1 \text{ nC}$

- $q_1 = 2 \text{ nC}$

Path:  $E_4 = 2310.97 \text{ (n/mkV)}$

- $\vec{F}_{01} = \left( \begin{array}{c} 19.97 \\ 0 \\ 0 \end{array} \right) \text{ (nN)}$

In the  $x$ -direction, the force components are  $F_{01,x} = 19.97 \text{ nN}$ . The force  $F_{01}$  is purely on the  $x$ -axis and therefore equal to  $F_{01,x}$ .

$$|\vec{F}_{01}| = \sqrt{\left( \sum_i F_{i,x} \right)^2 + \left( \sum_i F_{i,y} \right)^2} = \sqrt{19.97^2 + 0^2} = 19.97 \text{ nN}$$

$$|\vec{F}_{02}| = \sqrt{\left( \sum_i F_{i,x} \right)^2 + \left( \sum_i F_{i,y} \right)^2} = \sqrt{19.97^2 + 0^2} = 19.97 \text{ nN}$$

$$|\vec{F}_{03}| = \sqrt{\left( \sum_i F_{i,x} \right)^2 + \left( \sum_i F_{i,y} \right)^2} = \sqrt{19.97^2 + 0^2} = 19.97 \text{ nN}$$


$$|\vec{F}_{04}| = \sqrt{\left( \sum_i F_{i,x} \right)^2 + \left( \sum_i F_{i,y} \right)^2} = \sqrt{19.97^2 + 0^2} = 19.97 \text{ nN}$$

$$|\vec{F}_{01}| = |E_4| \cdot |q_0| \Rightarrow E_4 = \frac{|\vec{F}_{01}|}{|q_0|} = \frac{19.97 \text{ nN}}{1 \text{ nC}} = 19.97 \text{ nV/m}$$

$$|\vec{F}_{02}| = |E_4| \cdot |q_0| \Rightarrow E_4 = \frac{|\vec{F}_{02}|}{|q_0|} = \frac{19.97 \text{ nN}}{1 \text{ nC}} = 19.97 \text{ nV/m}$$

$$|\vec{F}_{03}| = |E_4| \cdot |q_0| \Rightarrow E_4 = \frac{|\vec{F}_{03}|}{|q_0|} = \frac{19.97 \text{ nN}}{1 \text{ nC}} = 19.97 \text{ nV/m}$$

$$|\vec{F}_{04}| = |E_4| \cdot |q_0| \Rightarrow E_4 = \frac{|\vec{F}_{04}|}{|q_0|} = \frac{19.97 \text{ nN}}{1 \text{ nC}} = 19.97 \text{ nV/m}$$

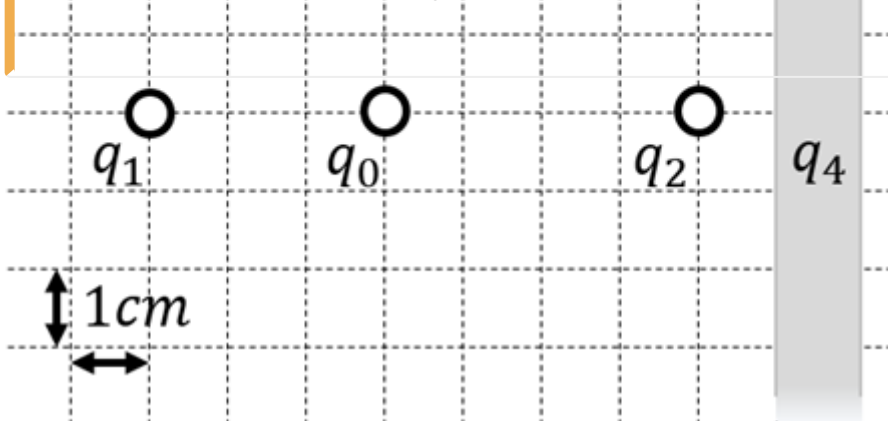

1. Calculate the single forces  $\vec{F}_{01}$ ,  $\vec{F}_{02}$ ,  $\vec{F}_{03}$ , on the charge  $q_0$ !

Path

First, calculate the magnitude of the forces, like  $|\vec{F}_{01}|$ .

The force  $\vec{F}_{01}$  is purely on the  $x$ -axis and therefore equal to  $F_{01,x}$ .

$$\vec{F}_{01} = F_{01,x} \hat{x}$$

$$F_{01,x} = \frac{1}{4\pi\epsilon_0} \cdot \frac{q_1 \cdot q_0}{r_{01}^2} = \frac{1}{4\pi \cdot 8.854 \cdot 10^{-12} \text{ As/Vm}} \cdot \frac{1 \text{ nC} \cdot 1 \text{ nC}}{(3 \cdot 10^{-2} \text{ m})^2} = 19.97 \text{ nN}$$

$$F_{02,x} = \frac{1}{4\pi\epsilon_0} \cdot \frac{q_2 \cdot q_0}{r_{02}^2} = \frac{1}{4\pi \cdot 8.854 \cdot 10^{-12} \text{ As/Vm}} \cdot \frac{2 \text{ nC} \cdot 1 \text{ nC}}{(3 \cdot 10^{-2} \text{ m})^2} = 39.94 \text{ nN}$$

$$F_{03,x} = \frac{1}{4\pi\epsilon_0} \cdot \frac{q_1 \cdot q_0}{r_{03}^2} = \frac{1}{4\pi \cdot 8.854 \cdot 10^{-12} \text{ As/Vm}} \cdot \frac{1 \text{ nC} \cdot 1 \text{ nC}}{(3 \cdot 10^{-2} \text{ m})^2} = 19.97 \text{ nN}$$

$$F_{04,x} = \frac{1}{4\pi\epsilon_0} \cdot \frac{q_4 \cdot q_0}{r_{04}^2} = \frac{1}{4\pi \cdot 8.854 \cdot 10^{-12} \text{ As/Vm}} \cdot \frac{1 \text{ nC} \cdot 1 \text{ nC}}{(3 \cdot 10^{-2} \text{ m})^2} = 19.97 \text{ nN}$$

$\cdot 10^{-6} \left\{ \frac{VAs}{m} \right\} = 19.97... \cdot 10^{-6} \left\{ \frac{Ws}{m} \right\} \quad \&= 19.97... \left\{ \frac{\mu N}{\mu N} \right\} \quad \text{\texttt{(to the right)}} \quad \&\&$

Similarly, we get for  $\vec{F}_{02}$  and  $\vec{F}_{03}$

$$\vec{F}_{02} = F_{02,x} \quad \&= -28.09... \left\{ \frac{\mu N}{\mu N} \right\} \quad \text{\texttt{(to the right)}} \quad \&\&$$

$$\vec{F}_{03} \quad \&= -22.47... \left\{ \frac{\mu N}{\mu N} \right\} \quad \text{\texttt{(to the top left)}} \quad \&\&$$

For  $\vec{F}_{03}$ , we have to calculate the  $x$ - and  $y$ -component.

This is possible, by using the angle  $\alpha$  between the line through  $q_0$  and  $q_3$  and the positive  $x$ -axis (pointing to the right).

So,  $\alpha$  has to be between  $90^\circ$  and  $180^\circ$ . It can be calculated by:

$$\alpha = \arctan\left(\frac{-4\text{ cm}}{+2\text{ cm}}\right) = \pi - 1.1071... = 180^\circ - 63.4...^\circ = 116.6...^\circ$$

Based on this, the  $x$ - and  $y$ -component is:

$$F_{03,x} \quad \&= |\vec{F}_{03}| \cdot \cos \alpha = 10.05... \left\{ \frac{\mu N}{\mu N} \right\} \quad \text{\texttt{(to the left)}} \quad \&\&$$

$$F_{03,y} \quad \&= |\vec{F}_{03}| \cdot \sin \alpha = 20.10... \left\{ \frac{\mu N}{\mu N} \right\} \quad \text{\texttt{(to the top)}} \quad \&\&$$

From:

<https://first.mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link:

[https://first.mexle.te.hs-heilbronn.de/ee2/task\\_5u1zbroaz75w39jk\\_with\\_calculation?rev=1721046485](https://first.mexle.te.hs-heilbronn.de/ee2/task_5u1zbroaz75w39jk_with_calculation?rev=1721046485)

Last update: **2024/07/15 14:28**

