

# Exam Winter Semester 2022

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents

- Exercise E5 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 3
- Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 6
- Exercise E9 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 7
- Exercise E13 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) ..... 7
- Exercise E11 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) ..... 11
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 11
- Exercise E7 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) ..... 12
- Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) ..... 13
- Exercise E6 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 15
- Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 19
- Exercise E10 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 20
- Exercise E14 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) ..... 20
- Exercise E12 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) ..... 24
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 24
- Exercise E8 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,

WS2022) ..... 25  
Exercise E4 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute  
written test, WS2022) ..... 26


<panel type="info" >

**Exercise E5 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result

$$U_{\text{rs}} = U_{\text{AB}} = 4.5 \text{ V}$$
  

$$R_{\text{i}} = R_{\text{AB}} = 6 \text{ } \Omega$$

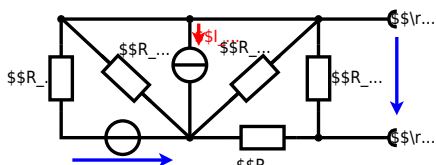


Calculate the internal resistance  $R_{\text{i}}$  and the source voltage  $U_{\text{rs}}$  of an equivalent linear voltage source on the connectors  $\text{A}$  and  $\text{B}$ .  
 $R_1=5.0 \text{ } \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3= 10 \text{ } \Omega$ ,  $I_4=4.2 \text{ A}$ ,  
 $R_5=10 \text{ } \Omega$ ,  $R_6=7.5 \text{ } \Omega$ ,  $R_7=15 \text{ } \Omega$  Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

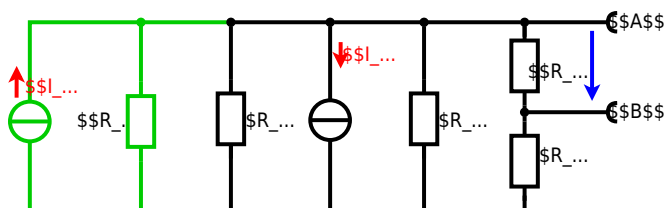


Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_{24}}{R_1} - I_4$$

The resulting circuit can again be transformed:

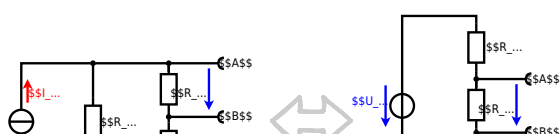

Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left( \frac{U_2}{R_1} - I_4 \right) \cdot \left( R_1 || R_3 || R_5 \right)$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \left( \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left( \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

<panel type="info" >

**Exercise E2 Temperature-dependent Resistance**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. The graph shows the temperature dependence of the resistance of a resistor. The resistor has a resistance of  $10 \text{ k}\Omega$  at  $25^\circ\text{C}$ . Calculate the resistance of the thermistor at  $-40^\circ\text{C}$ .

Its temperature coefficients are:  $\alpha = 0.01 \text{ K}^{-1}$  and  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$ .

The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Resistance of the resistor  $R$  depends on the temperature  $T$  and the heat  $Q$ . Therefore, a solution is to use a heat sink up the refrigeration system.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with  $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \text{ k}\Omega \cdot \left( 1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

<panel type="info" >

### Exercise E9 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage  $\underline{u}$  (in V) at  $t = 30$  ms for the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given.

After analysis, the following phasor voltage  $\underline{u}$  is extracted:  $\underline{u} = 4.68 \angle -90^\circ$  V. In the time domain, the voltage is  $u(t) = 4.68 \sin(\omega t - 90^\circ)$  V.

Solution  
.. Calculate the physical values of the components.  
Solution  $R = 10 \Omega$ ,  $X_L = 20 \Omega$

Solution  
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{10 + j20} = 2.31 \angle -63.4^\circ$$
  
The current and voltage are in phase since the circuit is purely resistive.  
The voltage across the capacitor is  $\underline{u}_C = \underline{I} \cdot (-j20) = 4.68 \angle -153.4^\circ$  V.  
In the time domain, the voltage is  $u_C(t) = 4.68 \sin(\omega t - 153.4^\circ)$  V.  
At  $t = 30$  ms,  $\omega t = 2\pi \cdot 15 \cdot 0.03 = 2.827$  rad.  
$$u_C(30 \text{ ms}) = 4.68 \sin(2.827 - 153.4^\circ) = 4.68 \sin(-25.4^\circ) = -2.0$$
 V.

<panel type="info" >

### Exercise E13 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage  $\underline{u}$  (in V) at  $t = 30$  ms for the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given. The voltage source is  $u(t) = 3.0 \sin(2\pi \cdot 15 t)$  V.  
Solution  
Result  
.. Draw the circuit diagram of the given circuit.







<panel type="info" >

**Exercise E11 Impedances at different Frequencies**  
(written test, approx. 18 % of a 60-minute written test, WS2022)

**2. A series circuit contains a resistor with  $R_1 = 1.00 \text{ k}\Omega$  and a capacitor with  $C_1 = 40 \text{ nF}$ . A voltage source of  $U = 10 \text{ V}$  is connected in series with the resistor and the capacitor. Calculate the absolute value of the impedance  $|Z|$  of the series circuit at  $f = 4 \text{ MHz}$ .**

**Solution**

$|Z| = \sqrt{R^2 + X_C^2}$

$|Z| = \sqrt{(1.00 \text{ k}\Omega)^2 + (10 \text{ V} / (4 \text{ MHz} \cdot 40 \text{ nF}))^2}$

$|Z| = \sqrt{1.00^2 + 0.625^2} \text{ k}\Omega$

$|Z| = 1.25 \text{ k}\Omega$

A series circuit means that the current is constant on every component.  
 The equivalent impedance for  $R$  and  $X_C$  combined is given by  $|Z| = \sqrt{R^2 + X_C^2}$   
 Parallel circuit means that the voltage is the same on  $R$  and  $X_C$   
 $|Z| = \sqrt{R^2 + X_C^2}$   
 $|Z| = \sqrt{(1.00 \text{ k}\Omega)^2 + (10 \text{ V} / (4 \text{ MHz} \cdot 40 \text{ nF}))^2}$   
 $|Z| = \sqrt{1.00^2 + 0.625^2} \text{ k}\Omega$   
 $|Z| = 1.25 \text{ k}\Omega$

<panel type="info" >

**Exercise E1 Resistance of a Wire by Resistivity**  
(written test, approx. 6 % of a 60-minute written test, WS2022)

**2. A heating element is used to heat wire with a temperature of  $180 \text{ }^\circ\text{C}$ . The electric power dissipation (= heat flow) of  $P = 40 \text{ W}$  is necessary. Calculate the current  $I$  in the heating element.**

**Solution**

$P = I^2 R$

$I = \sqrt{P/R}$

$I = \sqrt{40 \text{ W} / 1.10 \cdot 10^{-6} \text{ }\Omega\text{m}}$

$I = 190.4 \text{ A}$

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

<panel type="info" >


### Exercise E7 Charging Capacitors

(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance  $R_1$  of the battery and the capacitor  $C$  is initially charged to  $U_0 = 20 \text{ V}$ . The voltage across the capacitor is again  $U_0$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution**  
 Hint: To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

**Solution**  
 The ideal voltage source  $U$  is in series with the internal resistance  $R_1$  and the external resistor  $R_2$ . The voltage across the capacitor is  $u_c(t) = U \cdot (1 - e^{-t/\tau})$ , where  $\tau = (R_1 + R_2) \cdot C$ .  
 On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .

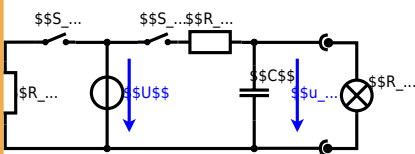


The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ } \Omega$  and a capacitor of  $C = 100 \text{ } \mu\text{F}$ .

The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first asks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0 \text{ V}$ .

- 1. First do not consider the light bulb - it is not connected to the RC circuit.
- 2. Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

Solution

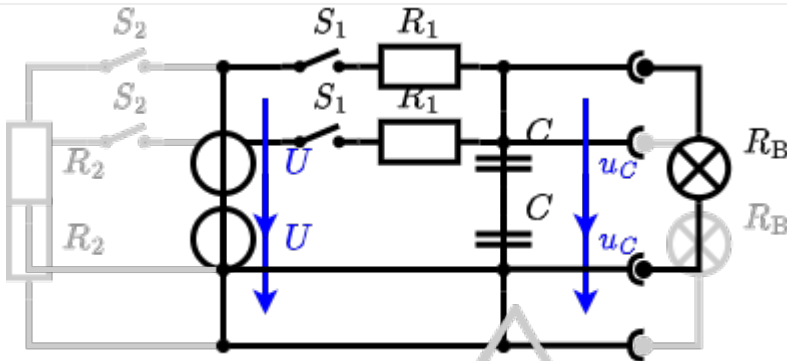

So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_C(t)$  which has to be  $u_C(t_1) = 0.5 \cdot U$ :  

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5$   

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$   
 The internal resistance is given by substituting the ideal voltage source with its resistance ( $R_i = 0 \Omega$ , short-circuit).  
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms} / (10 \Omega \cdot 100 \mu\text{F})})$$


<panel type="info" >

**Exercise E3 Pure Resistor Network Simplification**  
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 100% on the  $R_2 = R_3 = 10 \Omega$  and the voltage source  $U = 10 \text{V}$ .  
 Result:  $R_B$ .

Solution

$R_2 = R_3 = 100 \Omega$

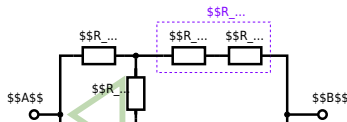

Since  $R_2 = R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution

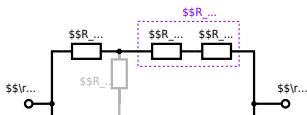

The equivalent resistor is given by a parallel configuration of resistors in series:


$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

<panel type="info" >

**Exercise E6 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

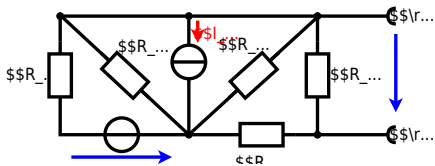


Calculate the internal resistance  $R_{int}$  and the source voltage  $U_{s}$  of an equivalent linear voltage source on the connectors  $A$  and  $B$ .  
 $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3= 10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  
 $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$  Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

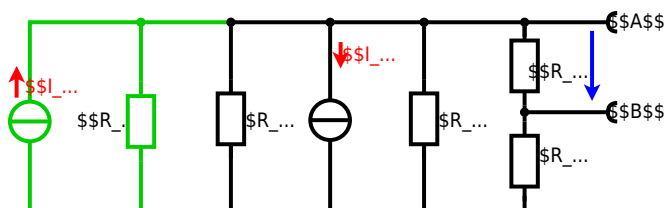

Now a lot of them can be combined. The resistors  $R_1, R_3, R_5$  are in parallel, like also  $I_2$  and  $I_4$ : 
$$R_{135} = R_1 || R_3 || R_5$$
 
$$I_{24} = I_2 - I_4 = \frac{U_{24}}{R_1} - I_4$$
 The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following: 
$$U_{24}$$

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left( \frac{U_2}{R_1} - I_4 \right) \cdot \left( \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right)$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \left( \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left( \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

<panel type="info" >

**Exercise E2 Temperature-dependent Resistance**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. The graph shows the temperature dependence of the resistance of a thermistor. The thermistor has a resistance of  $10 \text{ k}\Omega$  at  $25^\circ\text{C}$ . Calculate the resistance of the thermistor at  $-40^\circ\text{C}$ .

Its temperature coefficients are:  $\alpha = 0.01 \frac{1}{\text{K}}$  and  $\beta = 71 \cdot 10^{-6} \frac{1}{\text{K}^2}$ .

**Result** The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

$$R = 10 \text{ k}\Omega \cdot \left( 1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2 \right)$$

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot \left( 1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2 \right)$$

with  $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \text{ k}\Omega \cdot \left( 1 + 0.01 \frac{1}{\text{K}} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \frac{1}{\text{K}^2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

<panel type="info" >

### Exercise E10 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage  $\underline{U}$  and the phasor current  $\underline{I}$  in the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given.

After analysis, the following phasors can be determined:  $\underline{U} = 48.2 \angle -19.8^\circ \text{ V}$  and  $\underline{I} = 19.8 \angle -19.8^\circ \text{ A}$ .  
Result

.. Calculate the physical values of the components.  
Solution  $\underline{U} = 48.2 \angle -19.8^\circ \text{ V}$  and  $\underline{I} = 19.8 \angle -19.8^\circ \text{ A}$

Solution  
$$\underline{U} = \underline{I} \cdot \underline{Z} = \{50 \angle 0^\circ\} \cdot \{4.68 \angle -19.8^\circ\} = 48.2 \angle -19.8^\circ \text{ V}$$
  
The current and voltage are in phase since the circuit is purely resistive.  
Resulting current  $I = 0.24 \text{ A}$  and voltage  $U = 4.68 \text{ V}$ .  
The phase shift is  $\varphi = -19.8^\circ$ .  
With the complex part comes the complex value  $\underline{Z} = 4.68 \angle -19.8^\circ \Omega$ .  
The phase  $\varphi$  can be calculated as  $\varphi = \arctan\left(\frac{\text{Im}(\underline{Z})}{\text{Re}(\underline{Z})}\right) = \arctan\left(\frac{-4.68}{0.24}\right) = -19.8^\circ$ .

<panel type="info" >

### Exercise E14 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage  $\underline{U}$  and the phasor current  $\underline{I}$  in the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given.  
Result

.. Draw the circuit diagram of the given circuit. Label all components, voltages, and currents.  
Solution  
Result  $\underline{U} = 48.2 \angle -19.8^\circ \text{ V}$  and  $\underline{I} = 19.8 \angle -19.8^\circ \text{ A}$

```

Result
\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
&\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot f \cdot C} \quad \omega = 2\pi \cdot 15 \\
&\text{kHz} \cdot \frac{1}{2\pi \cdot 15 \cdot 330 \cdot 10^{-6}} = 159.28 \sim \Omega \\
&\end{align*}
\begin{align*} Z_L &= 2\pi \cdot f \cdot L = 2\pi \cdot 15 \cdot 330 \cdot 10^{-6} \\
&= 3.16 \sim \Omega \\
&\end{align*}
\begin{align*} Z &= \frac{1}{2\pi \cdot f \cdot C} \quad \omega = 2\pi \cdot 15 \\
&\sim \text{kHz} \cdot \frac{1}{2\pi \cdot 15 \cdot 330 \cdot 10^{-6}} \\
&\end{align*}
\underline{Z} = R + \underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j \\
\cdot \underline{Z}_L - j \cdot \underline{Z}_C \quad \underline{Z} = R + j \cdot (\underline{Z}_L - \underline{Z}_C) \quad |\underline{Z}| = \\
\sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2} \quad \end{align*}

```

□□□□□□□□ □510...





<panel type="info" >

**Exercise E12 Impedances at different Frequencies**  
(written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit means that the current is constant on every component.  
The equivalent impedance for R and L combined is given by  $Z = \sqrt{R^2 + X_L^2}$   
Parallel circuit means that the voltage is the same on R and C  
Since  $X_C = \frac{1}{\omega C}$  is perpendicular to  $R$ , this can be simplified to  $Z = \sqrt{R^2 + X_C^2}$   
Therefore the resulting current of the parallel circuit is given as:  
 $I_{total} = \sqrt{I_R^2 + I_C^2}$   
Back to the first formula:  $R \cdot I_{total} = X_C \cdot I_{total}$   
 $R = X_C \cdot \frac{I_{total}}{I_{total}}$   
 $R = \frac{1}{\omega C}$

Solution

$R_1 = 1.00 \cdot \omega$

$R_2 = 10.0 \cdot \omega$

A series circuit means that the current is constant on every component.  
The equivalent impedance for R and L combined is given by  $Z = \sqrt{R^2 + X_L^2}$   
Parallel circuit means that the voltage is the same on R and C  
Since  $X_C = \frac{1}{\omega C}$  is perpendicular to  $R$ , this can be simplified to  $Z = \sqrt{R^2 + X_C^2}$   
Therefore the resulting current of the parallel circuit is given as:  
 $I_{total} = \sqrt{I_R^2 + I_C^2}$   
Back to the first formula:  $R \cdot I_{total} = X_C \cdot I_{total}$   
 $R = X_C \cdot \frac{I_{total}}{I_{total}}$   
 $R = \frac{1}{\omega C}$

<panel type="info" >

**Exercise E1 Resistance of a Wire by Resistivity**  
(written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element is used to heat the wire with a temperature of 1800 K. Electric power dissipation (= heat flow) of  $P=40 \text{ W}$  is necessary.

Calculate the current I needed to operate for heating elements.  
The Nichrome wire has a resistivity of  $1.10 \cdot 10^{-6} \cdot \omega \text{ m}$ .  
The heating element is  $3 \text{ m}$  long and has a diameter of  $3.57 \text{ mm}$ .  
Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

<panel type="info" >

**Exercise E8 Charging Capacitors**  
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance of the battery. The voltage across the capacitor is again  $U_c(t_2)$  at the moment  $t_2 = 1 \text{ ms}$  after closing the switch. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution**  
Hint: To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

**Solution**  
The ideal voltage source  $U$  is in series with the internal resistance  $R_1$  and the external resistance  $R_2$ . The voltage across the capacitor is again  $u_c(t_2)$  at the moment  $t_2 = 1 \text{ ms}$  after closing the switch. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.




The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ } \Omega$  and a capacitor of  $C = 100 \text{ } \mu\text{F}$ .

The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first asks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0 \text{ V}$ .

- .. First do not consider the light bulb - it is not connected to the RC circuit.
- Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

Solution

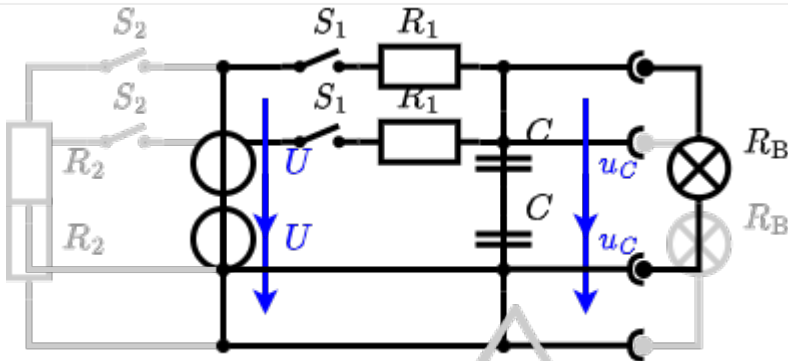

So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_C(t)$  which has to be  $u_C(t_1) = 0.5 \cdot U$ :  

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5$   

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$   
 The internal resistance is given by substituting the ideal voltage source with its resistance ( $R_i = 0 \Omega$ , short-circuit).  
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms} / (10 \Omega \cdot 100 \mu\text{F})})$$


<panel type="info" >

**Exercise E4 Pure Resistor Network Simplification**  
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 100% on the  $R_2 = R_3 = 10 \Omega$  and the voltage source  $U = 10 \text{V}$ .  
 Result:  $R_B$ .

Solution

$R_2 = R_3 = 100 \Omega$

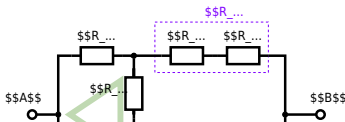

Since  $R_2 = R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution

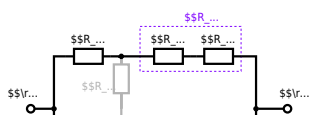

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = \{500 \sim \Omega \cdot 200 \sim \Omega\} \over {500 \sim \Omega + 200 \sim \Omega}$$

From:

<https://first.mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link:

[https://first.mexle.te.hs-heilbronn.de/electrical\\_engineering\\_1/ws2022\\_exam?rev=1678504945](https://first.mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1678504945)

Last update: **2023/03/11 04:22**

