

# Exam Winter Semester 2022

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents

Exercise E5 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 3

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 6

Exercise E9 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 7

Exercise E13 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) ..... 7

Exercise E11 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) ..... 11

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 11

Exercise E7 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) ..... 12

Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) ..... 13

Exercise E6 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 15

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 19

Exercise E10 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) ..... 20

Exercise E14 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) ..... 20

Exercise E12 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) ..... 24

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) ..... 24

Exercise E8 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,

---


WS2022) .....	25
Exercise E4 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) .....	26

d

**Exercise E5 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result

$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \text{ } \Omega \end{aligned}$$

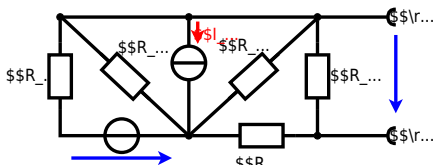

Calculate the internal resistance  $R_{\text{i}}$  and the source voltage  $U_{\text{rs}}$  of an equivalent linear voltage source on the connectors  $\text{A}$  and  $\text{B}$ .  
 $R_1=5.0 \text{ } \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3= 10 \text{ } \Omega$ ,  $I_4=4.2 \text{ A}$ ,  
 $R_5=10 \text{ } \Omega$ ,  $R_6=7.5 \text{ } \Omega$ ,  $R_7=15 \text{ } \Omega$  Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :



Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following:

$$U_{24} = I_{24} \cdot R_{135} + U_{24}$$

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left( \frac{U_2}{R_1} - I_4 \right) \cdot \left( \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right)$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \left( \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left( \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

d

**Exercise E2 Temperature-dependent Resistance**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. The graph shows the temperature dependence of the resistance of a resistor. The resistor has a resistance of  $10 \text{ k}\Omega$  at  $25^\circ\text{C}$ . Calculate the resistance of the thermistor at  $-40^\circ\text{C}$ .

Its temperature coefficients are:  $\alpha = 0.01 \text{ K}^{-1}$  and  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$ .

The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Resistance of the resistor  $R$  depends on the temperature  $T$  and the heat  $Q$ . Therefore, a solution is to use a heat pump to heat up the refrigeration system.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with  $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \text{ k}\Omega \cdot \left( 1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

d

**Exercise E9 Analyzing complex Impedances**  
(written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage  $\underline{u}$  and the phasor current  $\underline{i}$  in the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given.

After analysis, the following phasors shall be determined and extracted in the form  $\underline{u} = \hat{u} \cdot e^{j(\omega t + \varphi)}$  and  $\underline{i} = \hat{i} \cdot e^{j(\omega t + \varphi)}$ .

Solution  
.. Calculation of the phasor values of the components.  
Solution  $\underline{u} = \hat{u} \cdot e^{j(\omega t + \varphi)}$  and  $\underline{i} = \hat{i} \cdot e^{j(\omega t + \varphi)}$

Solution  
$$\underline{u} = \frac{\underline{U}}{\underline{Z}} \parallel \hat{u} = \{50 \text{ V} \cdot e^{j(\omega t)}\} \parallel \frac{1}{\{0.24 \text{ } \Omega + j4.68 \text{ } \Omega - j1.68 \text{ } \Omega\}}$$
  
The current and voltage are in phase since the impedance is purely real resulting in  $\varphi = 0$ .  
Therefore, the component must be a capacitor with the same absolute value.  
$$\underline{u} = \frac{50 \text{ V} \cdot e^{j(\omega t)}}{0.24 \text{ } \Omega + j4.68 \text{ } \Omega - j1.68 \text{ } \Omega} = \frac{50 \text{ V} \cdot e^{j(\omega t)}}{0.24 \text{ } \Omega + j3.0 \text{ } \Omega}$$
  
$$\underline{u} = \frac{50 \text{ V} \cdot e^{j(\omega t)}}{3.0 \text{ } \Omega} = 16.67 \text{ V} \cdot e^{j(\omega t)}$$
  
The absolute value  $\hat{u} = 16.67 \text{ V}$  and the phase  $\varphi = 0$  are calculated as  $\varphi = \arctan\left(\frac{\text{Im}(\underline{u})}{\text{Re}(\underline{u})}\right) = \arctan\left(\frac{-4.68}{0.24}\right)$   
With the complex part comes the complex value  $\underline{u} = 16.67 \text{ V} \cdot e^{j(\omega t)}$   
$$\hat{u} = \frac{X_L}{2\pi \cdot f} \parallel \hat{u} = \frac{4.68 \text{ } \Omega}{2\pi \cdot 300} = 2.47 \text{ } \mu\text{H}$$
  
The phase  $\varphi$  can be calculated as  $\varphi_i = \arctan\left(\frac{\text{Im}(\underline{i})}{\text{Re}(\underline{i})}\right) = \arctan\left(\frac{-4.68}{0.24}\right)$

d

**Exercise E13 Complex Impedance Circuit**  
(written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage  $\underline{u}$  and the phasor current  $\underline{i}$  in the circuit shown in the figure. The components  $R$  and  $X_L$  shall be given.

After analysis, the following phasors shall be determined and extracted in the form  $\underline{u} = \hat{u} \cdot e^{j(\omega t + \varphi)}$  and  $\underline{i} = \hat{i} \cdot e^{j(\omega t + \varphi)}$ .

Solution  
.. Draw the circuit diagram of the given circuit.  
Solution  $\underline{u} = \hat{u} \cdot e^{j(\omega t + \varphi)}$  and  $\underline{i} = \hat{i} \cdot e^{j(\omega t + \varphi)}$

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot f \cdot C} \quad \omega = 2\pi \cdot 15 \\
\text{Winkel } \varphi &= \arctan\left(\frac{X_L}{X_C}\right) = \arctan\left(\frac{2\pi \cdot f \cdot L}{\frac{1}{2\pi \cdot f \cdot C}}\right) \\
\end{align*}
\begin{align*} Z &= \sqrt{R^2 + (X_L - X_C)^2} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot f \cdot C} \quad \omega = 2\pi \cdot 15 \\
&\sim \text{kHz} \cdot 330 \sim \mu\text{H} \\
\end{align*}
\begin{align*} \underline{Z} &= R + j \underline{Z}_L - j \underline{Z}_C \\
&= R + j(\underline{Z}_L - \underline{Z}_C) \quad |\underline{Z}| = \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2} \\
\end{align*}

```

□□□□□□□□ □510...





d

**Exercise E11 Impedances at different Frequencies**  
(written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit means that the current is constant on every component.  
The equivalent impedance for R and L combined is given by  $Z = \sqrt{R^2 + X_L^2}$   
Parallel circuit means that the voltage is the same on R and C  
Since  $X_C = 1 / (\omega C)$  is perpendicular to R, this can be simplified to  $Z = \sqrt{R^2 + X_C^2}$   
Therefore, the resulting current of the parallel circuit is given as:  
 $I_{total} = I_R + I_C$   
 $I_{total} = \frac{U}{R} + \frac{U}{X_C}$   
Back to the first formula:  $R \cdot I_{total} = X_C \cdot I_{total} \cdot \frac{I_{total}}{I_{total}}$   
 $R = X_C \cdot \frac{I_{total}}{I_{total}}$

Solution

$R_1 = 1.00 \cdot \Omega$

$R_2 = 10.0 \cdot \Omega$

A series circuit means that the current is constant on every component.  
The equivalent impedance for R and L combined is given by  $Z = \sqrt{R^2 + X_L^2}$   
Parallel circuit means that the voltage is the same on R and C  
Since  $X_C = 1 / (\omega C)$  is perpendicular to R, this can be simplified to  $Z = \sqrt{R^2 + X_C^2}$   
Therefore, the resulting current of the parallel circuit is given as:  
 $I_{total} = I_R + I_C$   
 $I_{total} = \frac{U}{R} + \frac{U}{X_C}$   
Back to the first formula:  $R \cdot I_{total} = X_C \cdot I_{total} \cdot \frac{I_{total}}{I_{total}}$   
 $R = X_C \cdot \frac{I_{total}}{I_{total}}$

d

**Exercise E1 Resistance of a Wire by Resistivity**  
(written test, approx. 6 % of a 60-minute written test, WS2022)

The heating element is used to heat the wire with a temperature of 1800 K. Electric power dissipation (= heat flow) of  $P=40 \text{ W}$  is necessary.  
Calculate the current I needed to operate for heating elements.  
The Nichrome wire has a resistivity of  $1.10 \cdot 10^{-6} \cdot \Omega \cdot \text{m}$ .

The heating element is  $3 \text{ m}$  long and has a diameter of  $3.57 \text{ mm}$ .

Solution:  $R = 10^{-3} \cdot \Omega$

Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ }\Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

d

**Exercise E7 Charging Capacitors**  
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance  $R_1$  of the battery. The capacitor is initially uncharged. The switch  $S_1$  is closed at  $t_0 = 0 \text{ s}$  and the voltage across the capacitor is again  $U$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution**  
Hint: To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

**Solution**  
The ideal voltage source  $U$  is in series with the internal resistance  $R_1$  and the external resistance  $R_2$ . The voltage across the capacitor is again  $U$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.




The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ }\Omega$  and a capacitor of  $C = 100 \text{ }\mu\text{F}$ .

The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first asks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0 \text{ V}$ .

- 1. First do not consider the light bulb - it is not connected to the RC circuit.
- 2. Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

Solution

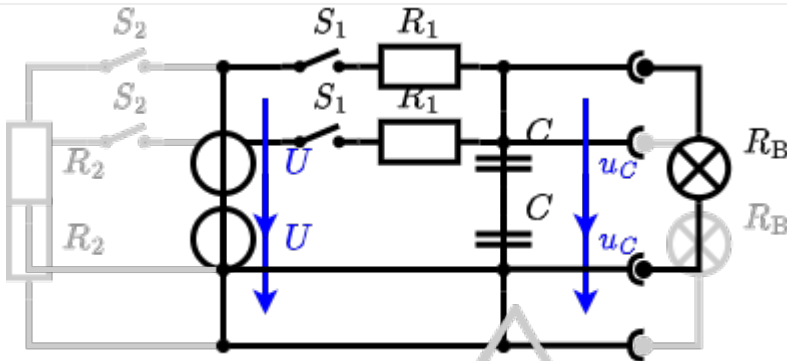

So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_C(t)$  which has to be  $u_C(t_1) = 0.5 \cdot U$ :  

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5$   

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$   
 The internal resistance is given by substituting the ideal voltage source with its resistance ( $R_i = 0 \Omega$ , short-circuit).  

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms}/(10 \Omega \cdot 100 \mu\text{F})})$$


d

**Exercise E3 Pure Resistor Network Simplification**  
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0 ohm,  $R_2 = R_3 = 10 \Omega$  and the voltage between  $B$  and  $B'$  shall be given.

Solution

$R_2 = R_3 = 100 \Omega$

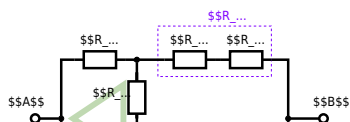

Since  $R_2 = R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution

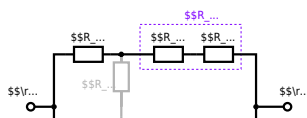

The equivalent resistor is given by a parallel configuration of resistors in series:


$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel R_{\text{eq}}$$

d

**Exercise E6 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

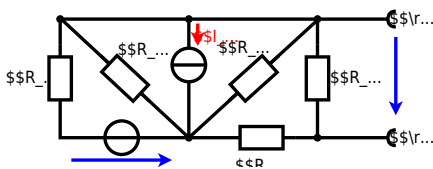


Calculate the internal resistance  $R_i$  and the source voltage  $U_s$  of an equivalent linear voltage source on the connectors  $A$  and  $B$ .  
 $R_1=5.0 \text{ } \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3= 10 \text{ } \Omega$ ,  $I_4=4.2 \text{ A}$ ,  
 $R_5=10 \text{ } \Omega$ ,  $R_6=7.5 \text{ } \Omega$ ,  $R_7=15 \text{ } \Omega$  Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

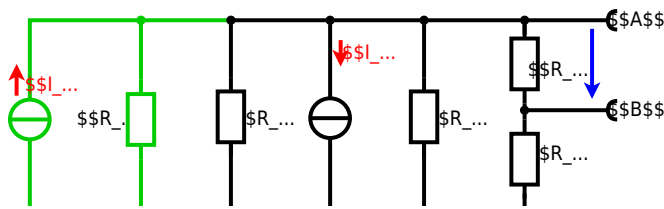

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following:

$$U_{24} = I_{24} \cdot R_{135} + I_{24} \cdot R_2 + I_{24} \cdot R_4$$

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left( \frac{U_2}{R_1} - I_4 \right) \cdot \left( \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right)$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \left( \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left( \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

d

**Exercise E2 Temperature-dependent Resistance**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. The given diagram shows a temperature sensitive resistor with a negative temperature coefficient. The resistor has a resistance of  $10 \text{ k}\Omega$  at  $25^\circ\text{C}$ . Your answer.

Its temperature coefficients are:  $\alpha = 0.01 \frac{1}{\text{K}}$  and  $\beta = 71 \cdot 10^{-6} \frac{1}{\text{K}^2}$

Result: The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

$$R = 10 \text{ k}\Omega \cdot \left( 1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2 \right)$$

Resistor transfer resistor  $P = U \cdot I$  and  $P = \frac{U^2}{R}$ . Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot \left( 1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2 \right)$$

with  $\Delta T = T_{\text{end}} - T_{\text{start}}$

$$R = 10 \text{ k}\Omega \cdot \left( 1 + 0.01 \frac{1}{\text{K}} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \frac{1}{\text{K}^2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

d

**Exercise E10 Analyzing complex Impedances**  
(written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage  $\underline{u}$  across the  $4.68 \text{ m}\Omega$  resistor in the circuit shown in the figure. The current  $\underline{i}$  is given by  $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$ . The voltage  $\underline{u}$  is to be determined. ( $R$  and  $X_L$  shall be given.)

After analysis, the following phasor diagram can be drawn. The voltage  $\underline{u}$  is to be determined. ( $R$  and  $X_L$  shall be given.)

Result  
Solution  
.. Calculate the phasor voltage  $\underline{u}$  across the  $4.68 \text{ m}\Omega$  resistor in the circuit shown in the figure. The current  $\underline{i}$  is given by  $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$ . The voltage  $\underline{u}$  is to be determined. ( $R$  and  $X_L$  shall be given.)

Solution  
$$\underline{u} = \underline{i} \cdot \underline{Z} = 0.24 \cos(300t - 16^\circ) \cdot (4.68 \text{ m}\Omega + j\omega L)$$
  
The current  $\underline{i}$  is given by  $i(t) = 0.24 \cos(300t - 16^\circ) \text{ A}$ . The voltage  $\underline{u}$  is to be determined. ( $R$  and  $X_L$  shall be given.)  
The impedance  $\underline{Z}$  is given by  $\underline{Z} = R + j\omega L = 4.68 \text{ m}\Omega + j\omega L$ .  
The voltage  $\underline{u}$  is given by  $\underline{u} = \underline{i} \cdot \underline{Z} = 0.24 \cos(300t - 16^\circ) \cdot (4.68 \text{ m}\Omega + j\omega L)$ .  
The magnitude of the voltage  $\underline{u}$  is given by  $|\underline{u}| = 0.24 \cdot \sqrt{4.68^2 + (\omega L)^2}$ .  
The phase of the voltage  $\underline{u}$  is given by  $\varphi_u = \varphi_i + \varphi_Z = -16^\circ + \arctan\left(\frac{\omega L}{4.68 \text{ m}\Omega}\right)$ .  
The voltage  $\underline{u}$  is given by  $u(t) = |\underline{u}| \cos(300t + \varphi_u)$ .  
With the complex part comes the complex value  $\underline{u} = |\underline{u}| \cdot e^{j\varphi_u}$ .  
The phase  $\varphi_u$  can be calculated as  $\varphi_u = \arctan\left(\frac{\omega L}{4.68 \text{ m}\Omega}\right) - 16^\circ$ .

d

**Exercise E14 Complex Impedance Circuit**  
(written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage  $\underline{u}$  across the  $30 \text{ m}\Omega$  resistor in the circuit shown in the figure. The current  $\underline{i}$  is given by  $i(t) = 3.0 \cos(2\pi \cdot 15 \cdot t) \text{ A}$ . The voltage  $\underline{u}$  is to be determined. ( $R$  and  $X_L$  shall be given.)

Result  
Solution  
.. Draw the circuit diagram of the given circuit. Label all components, voltages, and currents.

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi \cdot 15 \\
\omega &= 2\pi \cdot 15 \cdot 10^{-3} = 94.2 \text{ rad/s} \\
\begin{align*} I &= \frac{U}{Z} = \frac{10 \text{ V}}{\sqrt{R^2 + \left(\frac{1}{\omega C} - \omega L\right)^2}} \\
&= \frac{10}{\sqrt{30^2 + \left(\frac{1}{94.2 \cdot 10^{-6}} - 94.2 \cdot 0.02\right)^2}} \\
&= 0.28 \text{ A} \approx 280 \text{ mA} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi \cdot 15 \cdot 10^{-6}} = 555.6 \text{ } \Omega \\
&\approx 556 \text{ } \Omega \\
\begin{align*} \underline{Z} &= R + j\underline{Z}_L + \underline{Z}_C \\
&= 30 + j\underline{Z}_L - j\underline{Z}_C \\
&= 30 + j(\underline{Z}_L - \underline{Z}_C) \\
|\underline{Z}| &= \sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2} \\
\end{align*}
\end{align*}

```

□□□□□□□□ □510...





d

### Exercise E12 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit consists of a resistor with  $R_1 = 1.00 \text{ k}\Omega$  and a capacitor with  $C_1 = 40 \text{ nF}$ . A voltage source  $U = 10 \text{ V}$  is connected in series with the resistor and the capacitor. The frequency of the voltage source is  $f = 4 \text{ MHz}$ . Calculate the absolute value of the impedance of the series circuit.

**Solution**

$$R_1 = 1.00 \text{ k}\Omega$$

$$R_2 = 10.0 \text{ }\Omega$$

A series circuit means that the current is constant on every component.

The equivalent impedance for  $R_1$  and  $C_1$  combined is given by

Parallel circuit means that the voltage is the same on  $R_1$  and  $C_1$

$$\frac{1}{Z} = \frac{1}{R_1} + \frac{1}{X_C}$$

$$\frac{1}{Z} = \frac{1}{1000} + \frac{1}{-j \cdot 2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}}$$

$$\frac{1}{Z} = \frac{1}{1000} - \frac{j}{1000}$$

$$Z = \frac{1000}{1 - j}$$

$$Z = \frac{1000(1 + j)}{(1 - j)(1 + j)} = \frac{1000(1 + j)}{1 + 1} = 500(1 + j) \text{ }\Omega$$

$$|Z| = 500 \sqrt{1^2 + 1^2} = 500 \sqrt{2} \approx 707 \text{ }\Omega$$

d

### Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of nichrome wire with a cross-section of  $1.80 \text{ mm}^2$  and a length of  $3.57 \text{ m}$  is used. Calculate the resistance  $R$  of the heating element.

**Result**

$R = 1.03 \text{ }\Omega$

**Solution**

$$R = \rho \cdot \frac{l}{A}$$

$$R = 1.10 \cdot 10^{-6} \cdot \frac{3.57}{1.80 \cdot 10^{-6}} = 2.117 \text{ }\Omega$$

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

d

**Exercise E8 Charging Capacitors**  
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance of the battery. The voltage across the capacitor is again  $U_c(t_2)$  at the moment  $t_2 = 1 \text{ ms}$  after closing the switch. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution**  
To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

**Solution**  
The ideal voltage source  $U$  is in series with the internal resistance  $R_1$  and the external resistance  $R_2$ . The voltage across the capacitor is  $u_c(t)$ . On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .




The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ } \Omega$  and a capacitor of  $C = 100 \text{ } \mu\text{F}$ .

The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first asks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0 \text{ V}$ .

- 1. First do not consider the light bulb - it is not connected to the RC circuit.
- 2. Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

Solution

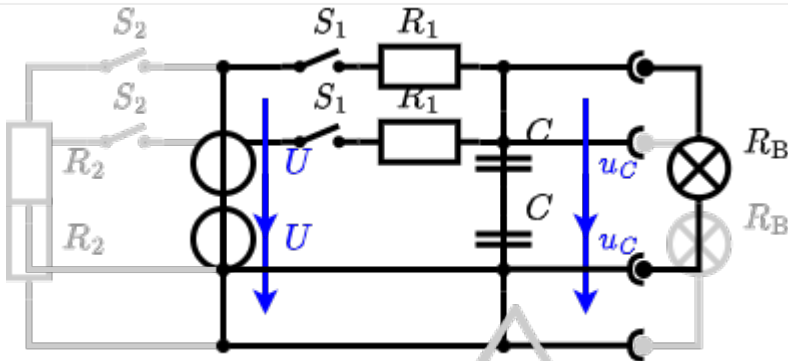

So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_C(t)$  which has to be  $u_C(t_1) = 0.5 \cdot U$ :  

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5$   

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with  $U$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$   
 The internal resistance is given by substituting the ideal voltage source with its resistance ( $R_i = 0 \Omega$ , short-circuit).  
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms}/(10 \Omega \cdot 100 \mu\text{F})})$$


d

**Exercise E4 Pure Resistor Network Simplification**  
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0°C. On the left,  $R_1 = R_2 = R_3 = 10 \Omega$  and  $R_4 = R_5 = 20 \Omega$ . The voltage source  $U = 10 \text{ V}$  is connected between terminals A and B.

Solution

$R_2 = R_3 = 100 \Omega$

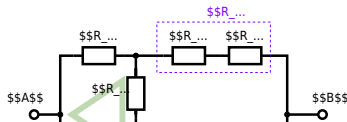

Since  $R_2 = R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) \parallel R_4 = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution

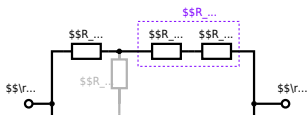

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = (500 \sim \Omega) \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \frac{500 \sim \Omega \cdot 200 \sim \Omega}{500 \sim \Omega + 200 \sim \Omega}$$

From: <https://first.mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link: [https://first.mexle.te.hs-heilbronn.de/electrical\\_engineering\\_1/ws2022\\_exam?rev=1680087384](https://first.mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680087384)

Last update: 2023/03/29 12:56

