

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E5 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 3

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 6

Exercise E9 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 7

Exercise E13 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 7

Exercise E11 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 11

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 11

Exercise E7 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 12

Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 13

Exercise E6 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 15

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 19

Exercise E10 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 20

Exercise E14 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 20

Exercise E12 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 24

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) 24

Exercise E8 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,


WS2022)	25
Exercise E4 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	26

start

**Exercise E5 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result

$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \text{ } \Omega \end{aligned}$$

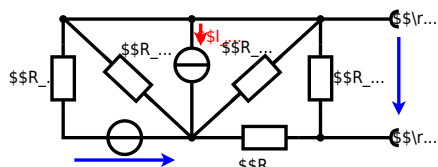

Calculate the internal resistance R_{i} and the source voltage U_{rs} of an equivalent linear voltage source on the connectors A and B .
$$R_1=5.0 \text{ } \Omega, \quad U_2=6.0 \text{ V}, \quad R_3= 10 \text{ } \Omega, \quad I_4=4.2 \text{ A}, \quad R_5=10 \text{ } \Omega, \quad R_6=7.5 \text{ } \Omega, \quad R_7=15 \text{ } \Omega$$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :



Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24}$$

endstart

Exercise E9 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage \underline{u} and the phasor current \underline{i} in the circuit shown in the figure. The components R and X_L shall be given.

After analysis, the following phasors can be determined: $\underline{u} = 4.68 \angle -90^\circ \text{ V}$ and $\underline{i} = 0.24 \angle 0^\circ \text{ A}$.
Solution

1. Calculation of the physical values of the components.
Solution $R = 10 \Omega$, $X_L = 20 \Omega$, $X_C = 10 \Omega$

Solution
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ \text{ V}}{200 \angle 90^\circ \Omega} = 0.25 \angle -90^\circ \text{ A}$$

The current \underline{i} is $i(t) = 0.25 \sin(\omega t - 90^\circ) \text{ A}$.
The voltage \underline{u} across the capacitor is $\underline{u} = \underline{I} \cdot X_C = 0.25 \angle -90^\circ \text{ A} \cdot 10 \angle 90^\circ \Omega = 2.5 \angle 0^\circ \text{ V}$.
The voltage \underline{u} across the inductor is $\underline{u} = \underline{I} \cdot X_L = 0.25 \angle -90^\circ \text{ A} \cdot 20 \angle 90^\circ \Omega = 5 \angle 0^\circ \text{ V}$.
The total voltage \underline{u} is $\underline{u} = 2.5 \angle 0^\circ \text{ V} + 5 \angle 0^\circ \text{ V} = 7.5 \angle 0^\circ \text{ V}$.
With the complex part $\varphi = -90^\circ - 0^\circ = -90^\circ$, the phase angle φ can be calculated as $\varphi = \arctan\left(\frac{\text{Im}(\underline{u})}{\text{Re}(\underline{u})}\right) = \arctan\left(\frac{0}{7.5}\right) = 0^\circ$.

endstart

Exercise E13 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the resulting phasor voltage \underline{u} and the phasor current \underline{i} in the circuit shown in the figure. The components R and X_L shall be given. The voltage source $u(t) = 3.0 \sin(2\pi \cdot 15 \cdot t) \text{ V}$.
Solution

This linear source is connected with an inductor of $330 \mu\text{H}$ and a capacitor of $22 \mu\text{F}$, all in series.
Result
1. Calculation of the physical values of the components.
Solution $R = 10 \Omega$, $X_L = 6.6 \Omega$, $X_C = 10 \Omega$.
2. Draw the circuit diagram of the given circuit. Label all components, voltages, and currents.

```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi f = 2\pi \cdot 15 \\
\omega &= 2\pi \cdot 15 = 94.2 \text{ rad/s} \\
\end{align*}
\begin{align*} Z_L &= 2\pi f L = 2\pi \cdot 15 \cdot 330 \cdot 10^{-6} \\
&= 3.16 \text{ m}\Omega \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} = \frac{1}{2\pi \cdot 15 \cdot 330 \cdot 10^{-6}} \\
&= 253.3 \text{ }\Omega \\
\end{align*}
\underline{Z} = R + \underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j \\
\cdot \underline{Z}_L - j \cdot \underline{Z}_C \quad \underline{Z} = R + j \cdot (\underline{Z}_L - \underline{Z}_C) \quad |\underline{Z}| = \\
\sqrt{R^2 + (\underline{Z}_L - \underline{Z}_C)^2}

```

□□□□□□□□ □510...



endstart

Exercise E11 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit with a resistor $R_1 = 1.00 \text{ k}\Omega$ and a capacitor $C_1 = 40 \text{ nF}$ is connected to an AC voltage source $U = 10 \text{ V}$ at a frequency $f = 4 \text{ MHz}$. The current I through the circuit is $I = 10 \text{ mA}$. The resistor R_2 and the capacitor C_2 are connected in parallel. The current I_2 through R_2 is $I_2 = 10 \text{ mA}$. Calculate the resistance R_2 and the capacitance C_2 .

Solution

$$R_1 = 1.00 \text{ k}\Omega$$

$$R_2 = 10.0 \text{ k}\Omega$$

A series circuit means that the current is constant on every component.

The equivalent impedance for R_2 and C_2 combined is given by

Parallel circuit means that the voltage is the same on R_2 and C_2

$$\frac{1}{Z} = \frac{1}{R_2} + \frac{1}{X_{C_2}}$$

$$\frac{1}{Z} = \frac{1}{R_2} + \frac{1}{-j \cdot \omega \cdot C_2}$$

Since Z is perpendicular to R_2 this can be simplified to

$$|Z|^2 = R_2^2 + X_{C_2}^2$$

(It has to, since R_2 is perpendicular to X_{C_2})

Therefore the resulting current of the parallel circuit is given as:

$$I = \sqrt{I_{R_2}^2 + I_{C_2}^2}$$

Under $\sqrt{I^2 - I_{R_2}^2} = I_{C_2}$

$$I_{C_2} = \sqrt{I^2 - I_{R_2}^2} = \sqrt{(10 \text{ mA})^2 - (10 \text{ mA})^2} = 0 \text{ mA}$$

Back to the first formula:

$$R_2 \cdot I = X_{C_2} \cdot I$$

$$R_2 = X_{C_2} = \frac{1}{\omega \cdot C_2}$$

endstart

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of nichrome wire with a cross-section of $S = 1.80 \text{ mm}^2$ and a length of $l = 3.57 \text{ m}$ is necessary. The power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary. Calculate the resistance R of the heating element.

Solution

$$R = 10.3 \text{ }\Omega$$

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad | \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

endstart

Exercise E7 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance R_1 of the battery. The capacitor C is initially uncharged. The switch S_1 is open. The voltage across the capacitor is again U_C at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_C(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution
Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution
The ideal voltage source U is in series with the internal resistance R_1 and the external resistance R_2 . The voltage across the capacitor is $u_C(t) = U \cdot (1 - e^{-t/\tau})$, where $\tau = (R_1 + R_2) \cdot C$.
On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .




The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_C(t_0) = 0 \text{ V}$.

- 1. First do not consider the light bulb - it is not connected to the RC circuit.
- 2. Calculate the point of time t_1 when $u_C(t_1) = 0.5 \cdot U$.

Solution

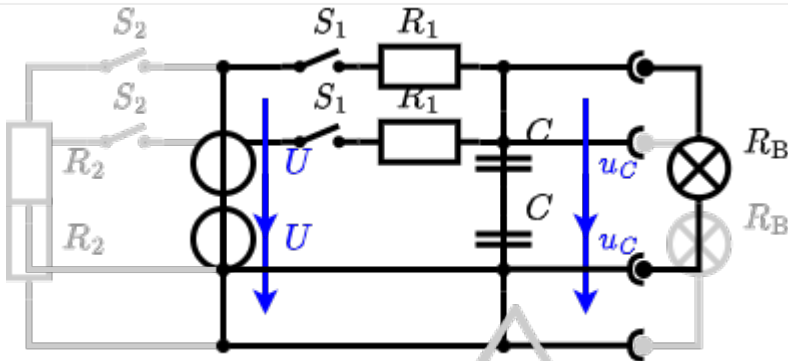

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$:

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$
 The internal resistance is given by substituting the ideal voltage source with its resistance ($R_i = 0 \Omega$, short-circuit).
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms} / (10 \Omega \cdot 100 \mu\text{F})})$$


endstart

Exercise E3 Pure Resistor Network Simplification
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0°C. On the left, $R_1 = R_2 = R_3 = 10 \Omega$ and $R_4 = R_5 = R_6 = 20 \Omega$. The voltage source $U = 10 \text{V}$ is connected between terminals A and B. The current I is the current through R_6 .

Solution

$R_2 = R_3 = 100 \Omega$

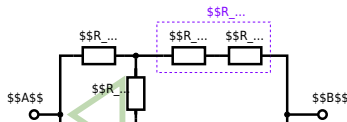

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

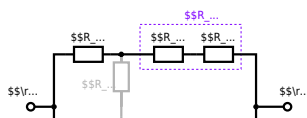

The equivalent resistor is given by a parallel configuration of resistors in series:


$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

endstart

**Exercise E6 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

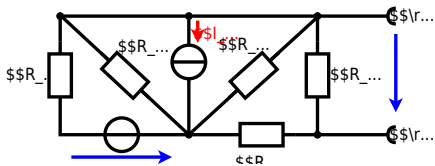


Calculated the internal resistance R_{int} and the source voltage U_{oc} of an equivalent linear voltage source on the connectors A and B .
$$R_1=5.0 \text{ } \Omega, \quad U_2=6.0 \text{ V}, \quad R_3= 10 \text{ } \Omega, \quad I_4=4.2 \text{ A}, \quad R_5=10 \text{ } \Omega, \quad R_6=7.5 \text{ } \Omega, \quad R_7=15 \text{ } \Omega$$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

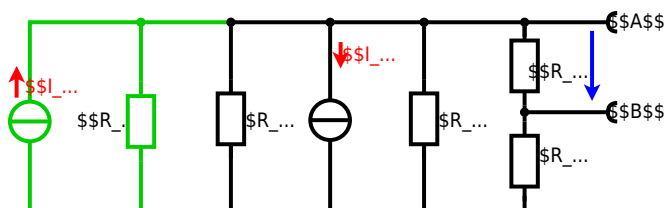

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135} + I_4 \cdot R_1$$

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left(\frac{U_2}{R_1} - I_4 \right) \cdot \left(\frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5} \right)$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \left(\frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot \left(\frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

endstart

Exercise E2 Temperature-dependent Resistance
(written test, approx. 6 % of a 60-minute written test, WS2022)

2. The diagram shows a circuit with a temperature-sensitive resistor. The resistor has a resistance of $10 \text{ k}\Omega$ at 25°C . Your answer.

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

The temperature inside the refrigeration system can reach down to -40°C .

$$R = 10 \text{ k}\Omega \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

Resistor transfer resistor $P = U^2 / R$ and $Q = P \cdot t$. Therefore, a solution is to use a heat pump up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

with $\Delta T = T_{\text{end}} - T_{\text{start}}$


$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$


```

\begin{align*} Z &= \frac{\hat{U}}{\hat{I}} \quad \hat{I} = \frac{\hat{U}}{Z} \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi \cdot 15 \\
\omega &= 2\pi \cdot 15 \cdot 10^{-3} = 942 \text{ rad/s} \\
\begin{align*} I &= \frac{U}{Z} = \frac{10 \text{ V}}{\sqrt{R^2 + \left(\frac{1}{\omega C} - \omega L\right)^2}} \\
&= \frac{10}{\sqrt{30^2 + \left(\frac{1}{942 \cdot 10^{-6}} - 942 \cdot 0.01\right)^2}} \\
&= 19.28 \text{ mA} \quad \omega = 19.28 \cdot 2\pi \\
\end{align*}
\begin{align*} Z_C &= \frac{1}{2\pi f C} \quad \omega = 2\pi \cdot 15 \\
&\sim 1 \text{ kHz} \cdot 330 \mu\text{H} \\
\end{align*}
\begin{align*} \underline{Z} &= R + \underline{Z}_L + \underline{Z}_C \quad \underline{Z} = R + j \\
&\cdot Z_L - j \cdot Z_C \quad \underline{Z} = R + j \cdot (Z_L - Z_C) \\
|\underline{Z}| &= \sqrt{R^2 + (Z_L - Z_C)^2} \\
\end{align*}

```

□□□□□□□□ □510...

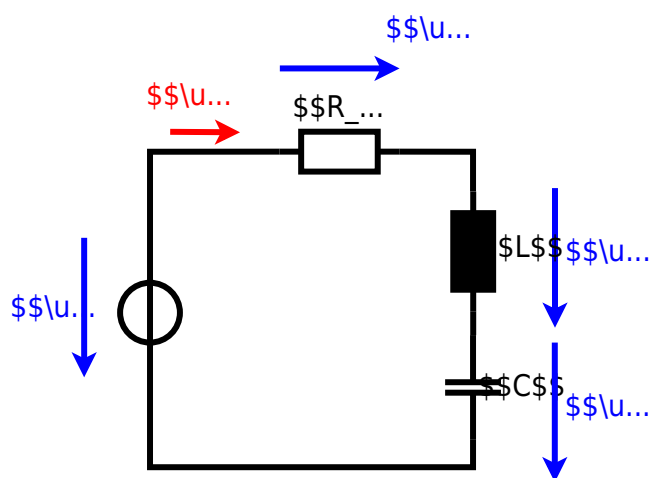

endstart

Exercise E12 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit with a resistor $R_1 = 1.00 \text{ k}\Omega$ and a capacitor $C_1 = 40 \text{ nF}$ is connected to an AC voltage source of $U = 10 \text{ V}$ at a frequency $f = 4 \text{ MHz}$. A resistor $R_2 = 10.0 \text{ }\Omega$ and a capacitor $C_2 = 4.7 \text{ }\mu\text{F}$ are connected in parallel to the same source. Calculate the current I through the parallel combination and the voltage U_{R_2} across the resistor R_2 .

Solution

$$R_1 = 1.00 \text{ k}\Omega$$

$$R_2 = 10.0 \text{ }\Omega$$

A series circuit means that the current is constant on every component.
 The equivalent impedance for R_2 and C_2 combined is given by

$$Z_{R_2C_2} = \frac{R_2 \cdot (-jX_{C_2})}{R_2 - jX_{C_2}}$$

Parallel circuit means that the voltage is the same on R_2 and C_2 .

$$\frac{1}{Z_{R_2C_2}} = \frac{1}{R_2} + \frac{1}{-jX_{C_2}}$$

Since $X_{C_2} = \frac{1}{\omega C_2}$ is perpendicular to R_2 , this can be simplified to

$$Z_{R_2C_2} = \frac{R_2 \cdot (-jX_{C_2})}{\sqrt{R_2^2 + X_{C_2}^2}}$$

(It has to, since R_2 is perpendicular to X_{C_2})

$$\frac{1}{Z_{R_2C_2}} = \frac{1}{R_2} + \frac{j\omega C_2}{1}$$

Therefore the resulting current of the parallel circuit is given as:

$$I_{R_2C_2} = \frac{U}{Z_{R_2C_2}}$$

This current is the same as the current I through R_1 .

$$I = \frac{U}{R_1 + Z_{R_2C_2}}$$

Back to the first formula:

$$R_1 \cdot I = X_{C_2} \cdot I \cdot \frac{R_2}{\sqrt{R_2^2 + X_{C_2}^2}}$$

endstart

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of nichrome wire with a cross-section of $A = 1.80 \text{ mm}^2$ and an electric power dissipation ($=$ heat flow) of $P = 40 \text{ W}$ is necessary. Calculate the current I needed to operate it.

The nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ }\Omega\text{m}$.

Solution

$$R = \frac{\rho \cdot l}{A}$$

Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad A = r^2 \cdot \pi \\ \frac{1}{4} d^2 \cdot \pi \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

endstart

Exercise E8 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the real battery) also takes into account the internal resistance of the battery. The voltage across the capacitor is again $U_c(t_0) = 0 \text{ V}$ at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution
Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution
The ideal voltage source U is in series with the voltage $U_1 = U \cdot \frac{R_2}{R_1 + R_2}$ and the internal resistance R_1 is in parallel with the capacitor. On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .




The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ } \Omega$ and a capacitor of $C = 100 \text{ } \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

- .. First do not consider the light bulb - it is not connected to the RC circuit.
- Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

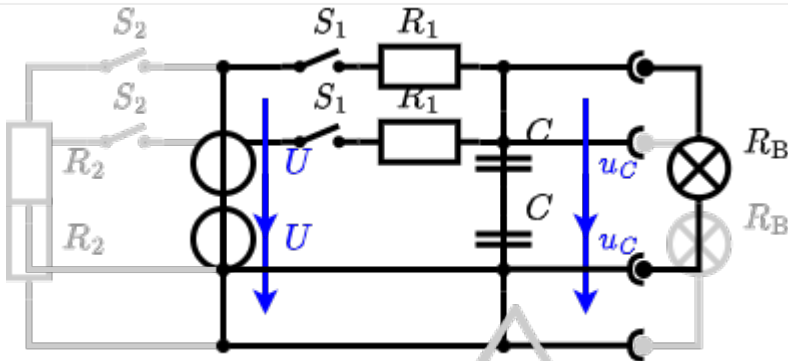

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$:

$$u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$

$$e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5)$$



An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$
 The internal resistance is given by substituting the ideal voltage source with its resistance ($R_i = 0 \Omega$, short-circuit).
 $R_i = R_1 \parallel R_B = 10 \Omega$

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1 \text{ms}/(10 \Omega \cdot 100 \mu\text{F})})$$


endstart

Exercise E4 Pure Resistor Network Simplification
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0°C. On the left, $R_1 = R_2 = 1.5 \text{ k}\Omega$ and the voltage source $U = 10 \text{ V}$.
 Result: R_B .

Solution

$R_2 = R_3 = 100 \Omega$

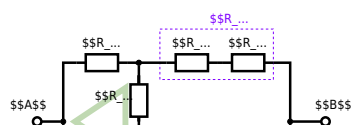

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{eq} = R_Y + (R_Y + R_1) \parallel (R_Y + R_2) \parallel R_5 = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

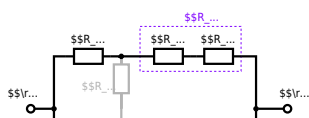

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = \{500 \sim \Omega \} \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \{500 \sim \Omega \cdot 200 \sim \Omega \} \over {500 \sim \Omega + 200 \sim \Omega} \parallel$$

end

From: <https://first.mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link: https://first.mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680100793

Last update: 2023/03/29 16:39

