

# Exam Winter Semester 2022

## Student Group

First Name	Surname	Matrikel Nr.

## Table of Contents


Exercise E5 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) .....	3
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) .....	6
Exercise E9 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) .....	7
Exercise E13 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) .....	7
Exercise E11 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) .....	10
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) .....	10
Exercise E7 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) .....	11
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) .....	12
Exercise E6 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) .....	14
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) .....	18
Exercise E10 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) .....	19
Exercise E14 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) .....	19
Exercise E12 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) .....	22
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022) .....	22
Exercise E8 Charging Capacitors (written test, approx. 16 % of a 60-minute written test,	

WS2022) ..... 23  
Exercise E4 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute  
written test, WS2022) ..... 24

**Exercise E5 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result

$$\begin{aligned} U_{\text{S}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \Omega \end{aligned}$$

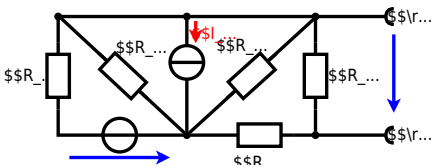

Calculated the internal resistance  $R_{\text{i}}$  and the source voltage  $U_{\text{S}}$  of an equivalent linear voltage source on the connectors  $\text{A}$  and  $\text{B}$ .  
 $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3= 10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$   
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :



Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following:

$$U_{24} = I_{24} \cdot R_{4}$$

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left( \frac{U_2}{R_1} - I_4 \right) \cdot R_1 || R_3 || R_5$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \left( \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \text{ A} \right) \cdot 15 \Omega \cdot 2.5 \Omega \cdot \frac{1}{7.5 \Omega + 15 \Omega + 2.5 \Omega}$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

**Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)**

2. A refrigerator is explained with the effect of resistance on power. The refrigerator has a resistance of  $10 \Omega$  at  $25^\circ \text{C}$  and  $25 \text{ W}$  at  $0^\circ \text{C}$ .

Its temperature coefficients are:  $\alpha = 0.01 \text{ K}^{-1}$  and  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$ .

**Result**  
The temperature inside the refrigeration system can reach down to  $-40^\circ \text{C}$ .

$$R_0 = 10 \Omega$$

The power of the resistor is  $P = U \cdot I$  and  $U = I \cdot R$ . Therefore, a solution is to increase the resistance of the resistor.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$\Delta T = T_{\text{end}} - T_{\text{start}}$$

$$R = 10 \Omega \cdot \left( 1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ \text{C} - 25^\circ \text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ \text{C} - 25^\circ \text{C})^2 \right)$$

**Exercise E9 Analyzing complex Impedances**  
 (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the complex power  $\underline{S}$  and the real power  $P$  in the circuit shown through the components.  $\underline{U}$  and  $\underline{X}_L$  shall be given.

After analysis, the full complex power  $\underline{S}$  and the real power  $P$  shall be extracted and given in phasor notation.  $\underline{S} = P + jQ$  and  $P = \text{Re}\{\underline{S}\}$ .

Solution  
 .. Calculate the physical values of the two components.  
 Solution  $R = 10 \Omega$  and  $X_L = 20 \Omega$

Solution  

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \angle 0^\circ}{10 + j20} = 2 \angle -63.4^\circ \text{ A}$$
 The voltage across the resistor is  $\underline{U}_R = I R = 20 \angle -63.4^\circ \text{ V}$  and the voltage across the inductor is  $\underline{U}_L = I X_L = 40 \angle -63.4^\circ \text{ V}$ .  
 The complex power is  $\underline{S} = \underline{U} \underline{I}^* = 50 \angle 0^\circ \cdot 2 \angle 63.4^\circ = 100 \angle 63.4^\circ \text{ VA}$ .  
 The real power is  $P = \text{Re}\{\underline{S}\} = 100 \cos(63.4^\circ) = 45.96 \text{ W}$ .  
 The reactive power is  $Q = \text{Im}\{\underline{S}\} = 100 \sin(63.4^\circ) = 90.14 \text{ var}$ .  
 With the complex power  $\underline{S} = P + jQ$  the physical values  $P$  and  $Q$  are calculated as  $P = \text{Re}\{\underline{S}\}$  and  $Q = \text{Im}\{\underline{S}\}$ .  
 The phase  $\varphi$  can be calculated as  $\varphi = \arctan\left(\frac{Q}{P}\right) = \arctan\left(\frac{90.14}{45.96}\right) = 63.4^\circ$ .

**Exercise E13 Complex Impedance Circuit**  
 (written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the circuit impedance  $\underline{Z}$  for a source  $u(t) = 3.0 \sin(2\pi \cdot 15 \cdot t) \text{ V}$ .  
 The circuit consists of a resistor  $R = 10 \Omega$ , an inductor  $L = 330 \mu\text{H}$ , and a capacitor  $C = 0.22 \mu\text{F}$ , all in series.

Solution  
 Result  $\underline{Z} = 10 + j19.8 - j19.8 = 10 \Omega$

Draw the circuit diagram of the given circuit and label all components, voltages, and currents.  

$$\underline{Z} = R + j\omega L - j\omega C = 10 + j2\pi \cdot 15 \cdot 330 \cdot 10^{-6} - j2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6} = 10 + j19.8 - j19.8 = 10 \Omega$$





**Exercise E11 Impedances at different Frequencies**  
**(written test, approx. 18 % of a 60-minute written test, WS2022)**

2. A series circuit consists of a resistor with a resistance of  $R_1 = 1.00 \text{ k}\Omega$ , a capacitor with a capacitance of  $C_1 = 40 \text{ nF}$ , and an inductor with an inductance of  $L_1 = 4.7 \text{ }\mu\text{H}$ . The circuit is connected to an AC voltage source with a voltage of  $U = 10 \text{ V}$  and a frequency of  $f = 4 \text{ MHz}$ . Calculate the absolute value of the impedance  $Z$  of the circuit.

Solution

$$Z = \sqrt{R^2 + (X_L - X_C)^2}$$

$$Z = \sqrt{1.00^2 + (2\pi \cdot 4 \cdot 10^6 \cdot 4.7 \cdot 10^{-6} - \frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}})^2}$$

A series circuit means that the current is constant on every component.  
 The equivalent impedance for  $R$  and  $L$  combined is given by  $Z = \sqrt{R^2 + X_L^2}$   
 Parallel circuit means that the voltage is the same on  $R$  and  $C$   $Z = \frac{R \cdot X_C}{\sqrt{R^2 + X_C^2}}$   
 Since  $X_L$  and  $X_C$  are perpendicular to each other, the resulting current of the parallel circuit is given as:  

$$I = \sqrt{I_R^2 + I_C^2}$$
  
 This can be simplified to  $Z = \frac{U}{I}$   
 Back to the first formula:  $Z = \sqrt{R^2 + (X_L - X_C)^2}$

**Exercise E1 Resistance of a Wire by Resistivity**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. Heating elements are used to heat the water in a domestic use of  $1.80 \text{ m}^3$  of water. The electric power dissipation (= heat flow) of  $P = 40 \text{ W}$  is necessary. Calculate the current  $I$  needed to operate for heating elements.  
 The Nichrome wire has a resistivity of  $\rho = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m}$ .  
 The heating element is  $3 \text{ m}$  long and has a diameter of  $3.57 \text{ mm}$ .

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}}$$

$$R = \rho \cdot \frac{L}{A} = 1.10 \cdot 10^{-6} \cdot \frac{3}{\pi \cdot (\frac{3.57 \cdot 10^{-3}}{2})^2} = 1.03 \cdot 10^{-3} \text{ }\Omega$$

$$I = \sqrt{\frac{40}{1.03 \cdot 10^{-3}}} = 198 \text{ A}$$

$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \cdot \Omega}} \quad \text{align*}$$

$$\begin{aligned} R &= \rho \cdot l \cdot \frac{1}{A} \quad \& \quad | \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} \cdot d^2 \cdot \pi \quad \& \quad R = \rho \cdot l \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ &= 1.10 \cdot 10^{-6} \cdot \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \cdot \text{m}}{(3.57 \cdot 10^{-3} \cdot \text{m})^2 \cdot \pi} \quad \& \quad \end{aligned}$$


**Exercise E7 Charging Capacitors**  
 (written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the light bulb) is a series of  $R_1$  and  $R_2$  and a capacitor  $C$  as indicated in Figure 1. The switch  $S_1$  is open. The voltage across the capacitor is again  $0 \text{ V}$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution**  
 Hint: To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

**Solution**  
 The ideal voltage source  $U$  is in series with  $R_1$  and  $R_2$ . The voltage  $u_c$  is independent of this series combination.


On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $S_1$ .

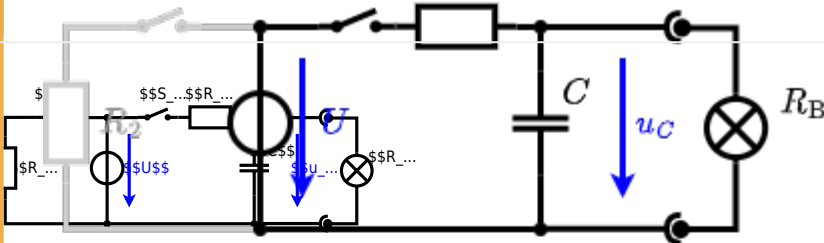

The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ }\Omega$  and a capacitor of  $C = 100 \text{ }\mu\text{F}$ . The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first tasks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0 \text{ V}$ .

.. First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

**Solution**

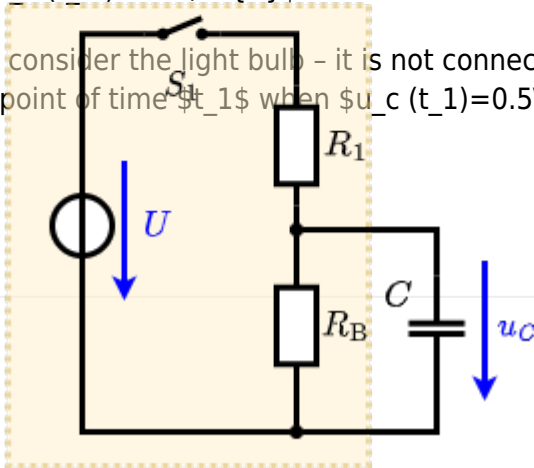

An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$  The internal resistance is given by substituting the ideal voltage source with its resistance ( $R = 0 \Omega$ , short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t) = U_s \cdot (1 - e^{-t/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t/(10 \Omega \cdot 100 \mu F)})$$

The following formula describes the time course of  $u_c(t)$  which has to be  $u_c(t_1) = 0.5 \cdot U$ : 
$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$




**Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall be simplified with  $R_1 = 200 \Omega$ ,  $R_2 = R_3 = 150 \Omega$ ,  $R_4 = 100 \Omega$  and the voltage  $U = 10 \text{ V}$ . Result:  $R_{eq}$ .

Solution

$$R_{eq} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

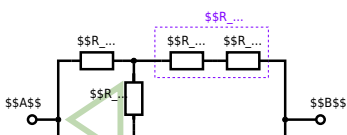

Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as: 
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \text{ } \Omega)^2}{3 \cdot 100 \text{ } \Omega} = \frac{1}{3} \cdot 100 \text{ } \Omega = 33.33 \text{ } \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series: 
$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \text{ } \Omega + (33.33 \text{ } \Omega + 400 \text{ } \Omega) \parallel (33.33 \text{ } \Omega + 100 \text{ } \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution




The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel R_{\text{eq}}$$

**Exercise E6 Equivalent linear Source  
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.  
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$

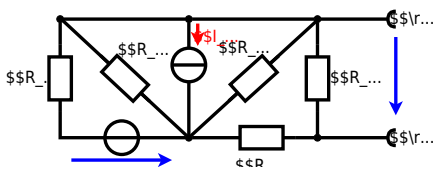


Calculate the internal resistance  $R_{in}$  and the source voltage  $U_{s}$  of an equivalent linear voltage source on the connectors  $A$  and  $B$ .  $R_1=5.0 \Omega$ ,  $U_2=6.0 \text{ V}$ ,  $R_3=10 \Omega$ ,  $I_4=4.2 \text{ A}$ ,  $R_5=10 \Omega$ ,  $R_6=7.5 \Omega$ ,  $R_7=15 \Omega$ . Use equivalent sources in order to simplify the circuit!

### Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of  $U_2$  and  $R_1$  can be transformed into a current source  $I_2 = \frac{U_2}{R_1}$  and  $R_1$ :

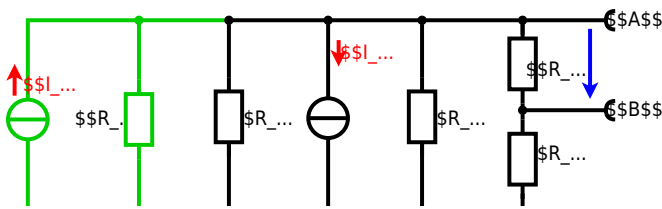

Now a lot of them can be combined. The resistors  $R_1$ ,  $R_3$ ,  $R_5$  are in parallel, like also  $I_2$  and  $I_4$ :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the  $U_{24}$  is calculated by  $I_{24}$  as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - I_4 \cdot (R_1 || R_3 || R_5)$$

On the right side of the last circuit, there is a voltage divider given by  $R_{135}$ ,  $R_6$ , and  $R_7$ .

Therefore the voltage between  $A$  and  $B$  is given as:

$$U_{AB} = U_{24} \cdot \left( \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) - \left( \frac{U_2}{R_1} - I_4 \right) \cdot (R_1 || R_3 || R_5)$$

For the internal resistance  $R_i$  the ideal voltage source is substituted by its resistance ( $=0 \Omega$ , so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with  $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$ :

$$U_{AB} = \left( \frac{6.0 \text{ V}}{5.0 \Omega} \right) - 4.2 \Omega \cdot \left( \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right)$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

**Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)**

2. A refrigerator is explained with the effect of resistance on refrigeration systems. The refrigerator has a resistance of  $10 \Omega$  at  $25^\circ\text{C}$  and  $25 \Omega$  at  $-40^\circ\text{C}$ .

Its temperature coefficients are:  $\alpha = 0.01 \text{ K}^{-1}$  and  $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$ .

**Result** The temperature inside the refrigeration system can reach down to  $-40^\circ\text{C}$ .

$$R = 10 \cdot (1 + 0.01 \cdot \Delta T + 71 \cdot 10^{-6} \cdot \Delta T^2)$$

The power of the resistor is  $P = U \cdot I = \frac{U^2}{R}$  and  $Q = P \cdot t$ . Therefore, a solution is to use a heat pump to heat up the refrigeration system.

Therefore, with constant  $U$  and increasing  $R$  the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$\Delta T = T_{\text{end}} - T_{\text{start}}$$

$$R = 10 \Omega \cdot \left( 1 + 0.01 \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2 \right)$$

**Exercise E10 Analyzing complex Impedances**  
 (written test, approx. 14 % of a 60-minute written test, WS2022)

1. Calculate the complex power  $\underline{S}$  in a circuit with a voltage source  $\underline{u}(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$  V and a load  $\underline{Z} = 0.24 - j4.68 \Omega$ . The real and imaginary parts of  $\underline{S}$  shall be given.

Result:  $\underline{S} = 1.125 - j2.16 \text{ VA}$

Solution:  $\underline{S} = \underline{U} \cdot \underline{I}^* = \frac{\underline{U} \cdot \underline{U}}{\underline{Z}} = \frac{3 \cdot 3}{0.24 - j4.68} = 1.125 - j2.16 \text{ VA}$

2. Calculate the complex power  $\underline{S}$  in a circuit with a voltage source  $\underline{u}(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$  V and a load  $\underline{Z} = 0.24 - j4.68 \Omega$ . The real and imaginary parts of  $\underline{S}$  shall be given.

Result:  $\underline{S} = 1.125 - j2.16 \text{ VA}$

Solution:  $\underline{S} = \underline{U} \cdot \underline{I}^* = \frac{\underline{U} \cdot \underline{U}}{\underline{Z}} = \frac{3 \cdot 3}{0.24 - j4.68} = 1.125 - j2.16 \text{ VA}$

3. Calculate the complex power  $\underline{S}$  in a circuit with a voltage source  $\underline{u}(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$  V and a load  $\underline{Z} = 0.24 - j4.68 \Omega$ . The real and imaginary parts of  $\underline{S}$  shall be given.

Result:  $\underline{S} = 1.125 - j2.16 \text{ VA}$

Solution:  $\underline{S} = \underline{U} \cdot \underline{I}^* = \frac{\underline{U} \cdot \underline{U}}{\underline{Z}} = \frac{3 \cdot 3}{0.24 - j4.68} = 1.125 - j2.16 \text{ VA}$

4. Calculate the complex power  $\underline{S}$  in a circuit with a voltage source  $\underline{u}(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$  V and a load  $\underline{Z} = 0.24 - j4.68 \Omega$ . The real and imaginary parts of  $\underline{S}$  shall be given.

Result:  $\underline{S} = 1.125 - j2.16 \text{ VA}$

Solution:  $\underline{S} = \underline{U} \cdot \underline{I}^* = \frac{\underline{U} \cdot \underline{U}}{\underline{Z}} = \frac{3 \cdot 3}{0.24 - j4.68} = 1.125 - j2.16 \text{ VA}$

5. Calculate the complex power  $\underline{S}$  in a circuit with a voltage source  $\underline{u}(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$  V and a load  $\underline{Z} = 0.24 - j4.68 \Omega$ . The real and imaginary parts of  $\underline{S}$  shall be given.

Result:  $\underline{S} = 1.125 - j2.16 \text{ VA}$

Solution:  $\underline{S} = \underline{U} \cdot \underline{I}^* = \frac{\underline{U} \cdot \underline{U}}{\underline{Z}} = \frac{3 \cdot 3}{0.24 - j4.68} = 1.125 - j2.16 \text{ VA}$

6. Calculate the complex power  $\underline{S}$  in a circuit with a voltage source  $\underline{u}(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$  V and a load  $\underline{Z} = 0.24 - j4.68 \Omega$ . The real and imaginary parts of  $\underline{S}$  shall be given.

Result:  $\underline{S} = 1.125 - j2.16 \text{ VA}$

Solution:  $\underline{S} = \underline{U} \cdot \underline{I}^* = \frac{\underline{U} \cdot \underline{U}}{\underline{Z}} = \frac{3 \cdot 3}{0.24 - j4.68} = 1.125 - j2.16 \text{ VA}$

**Exercise E14 Complex Impedance Circuit**  
 (written test, approx. 15 % of a 60-minute written test, WS2022)

1. Calculate the complex power  $\underline{S}$  in a circuit with a voltage source  $\underline{u}(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$  V and a load  $\underline{Z} = 0.24 - j4.68 \Omega$ . The real and imaginary parts of  $\underline{S}$  shall be given.

Result:  $\underline{S} = 1.125 - j2.16 \text{ VA}$

Solution:  $\underline{S} = \underline{U} \cdot \underline{I}^* = \frac{\underline{U} \cdot \underline{U}}{\underline{Z}} = \frac{3 \cdot 3}{0.24 - j4.68} = 1.125 - j2.16 \text{ VA}$

2. Calculate the complex power  $\underline{S}$  in a circuit with a voltage source  $\underline{u}(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$  V and a load  $\underline{Z} = 0.24 - j4.68 \Omega$ . The real and imaginary parts of  $\underline{S}$  shall be given.

Result:  $\underline{S} = 1.125 - j2.16 \text{ VA}$

Solution:  $\underline{S} = \underline{U} \cdot \underline{I}^* = \frac{\underline{U} \cdot \underline{U}}{\underline{Z}} = \frac{3 \cdot 3}{0.24 - j4.68} = 1.125 - j2.16 \text{ VA}$

3. Calculate the complex power  $\underline{S}$  in a circuit with a voltage source  $\underline{u}(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$  V and a load  $\underline{Z} = 0.24 - j4.68 \Omega$ . The real and imaginary parts of  $\underline{S}$  shall be given.

Result:  $\underline{S} = 1.125 - j2.16 \text{ VA}$


Solution:  $\underline{S} = \underline{U} \cdot \underline{I}^* = \frac{\underline{U} \cdot \underline{U}}{\underline{Z}} = \frac{3 \cdot 3}{0.24 - j4.68} = 1.125 - j2.16 \text{ VA}$

4. Calculate the complex power  $\underline{S}$  in a circuit with a voltage source  $\underline{u}(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$  V and a load  $\underline{Z} = 0.24 - j4.68 \Omega$ . The real and imaginary parts of  $\underline{S}$  shall be given.

Result:  $\underline{S} = 1.125 - j2.16 \text{ VA}$

Solution:  $\underline{S} = \underline{U} \cdot \underline{I}^* = \frac{\underline{U} \cdot \underline{U}}{\underline{Z}} = \frac{3 \cdot 3}{0.24 - j4.68} = 1.125 - j2.16 \text{ VA}$



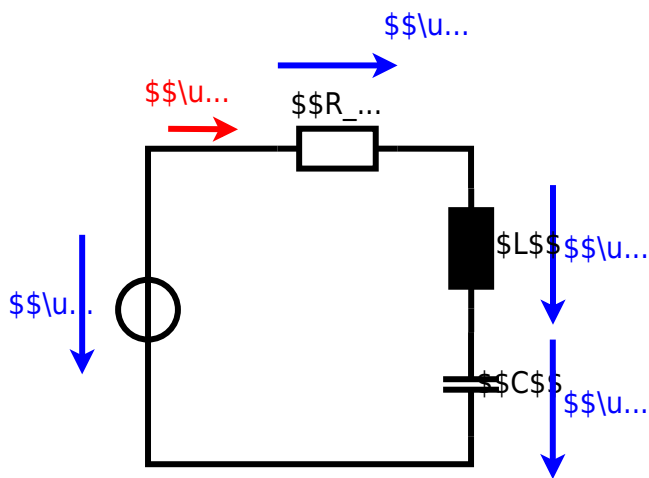

**Exercise E12 Impedances at different Frequencies**  
**(written test, approx. 18 % of a 60-minute written test, WS2022)**

2. A series circuit consists of a resistor with a resistance of  $R_1 = 1.00 \text{ k}\Omega$ , a capacitor with a capacitance of  $C_1 = 40 \text{ nF}$ , and an inductor with an inductance of  $L_1 = 4.7 \text{ }\mu\text{H}$ . The circuit is connected to an AC voltage source with a voltage of  $U = 10 \text{ V}$  and a frequency of  $f = 4 \text{ MHz}$ . Calculate the absolute value of the impedance  $Z$  of the circuit.

Solution

$$Z = \sqrt{R^2 + (X_L - X_C)^2}$$

$$Z = \sqrt{1.00^2 + (2\pi \cdot 4 \cdot 10^6 \cdot 4.7 \cdot 10^{-6} - \frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}})^2}$$

$$Z = \sqrt{1.00^2 + (117.6 - 9.95)^2}$$

$$Z = \sqrt{1.00^2 + 107.65^2}$$

$$Z = \sqrt{117.65^2 + 1.00^2}$$

$$Z = 117.65 \text{ }\Omega$$

**Exercise E1 Resistance of a Wire by Resistivity**  
**(written test, approx. 6 % of a 60-minute written test, WS2022)**

2. A heating element made of nichrome wire with a diameter of  $d = 0.357 \text{ mm}$  and a length of  $l = 3 \text{ m}$  is used for heating. The power dissipation (heat flow) of  $P = 40 \text{ W}$  is necessary. Calculate the resistance  $R$  of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \Rightarrow \quad I = \sqrt{\frac{P}{R}}$$

$$P = U \cdot \sqrt{\frac{P}{R}} \quad \Rightarrow \quad \sqrt{P} = U \cdot \sqrt{\frac{1}{R}} \quad \Rightarrow \quad \sqrt{P} \cdot \sqrt{R} = U$$

$$\sqrt{R} = \frac{U}{\sqrt{P}} \quad \Rightarrow \quad R = \left(\frac{U}{\sqrt{P}}\right)^2$$

$$R = \left(\frac{230 \text{ V}}{\sqrt{40 \text{ W}}}\right)^2 = 320.75 \text{ }\Omega$$

$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \cdot \Omega}} \quad \text{align*}$$

$$\begin{aligned} R &= \rho \cdot l \cdot \frac{1}{A} \quad \& \quad | \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} \cdot d^2 \cdot \pi \quad \& \quad \rho = \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ &= 1.10 \cdot 10^{-6} \cdot \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \quad \& \quad \end{aligned}$$


**Exercise E8 Charging Capacitors**  
 (written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (with the light bulb) is a series of  $R_1$  and  $R_2$  and a capacitor  $C$  as indicated in Figure 8.5. Initially, the voltage across the capacitor is again  $0 \text{ V}$  at the moment  $t_0 = 0 \text{ s}$  when the switch  $S_1$  is closed. Calculate the voltage  $u_c(t_2)$  across the capacitor at  $t_2 = 1 \text{ ms}$  after closing the switch.

**Solution** To solve this, first create an equivalent linear voltage source from  $U$ ,  $R_1$ , and  $R_2$ .

The ideal voltage source  $U$  is in series with  $R_1$  and  $R_2$ . The voltage  $u_c$  is  $U \cdot \frac{R_B}{R_1 + R_2 + R_B}$ .


On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting  $R_2$ .

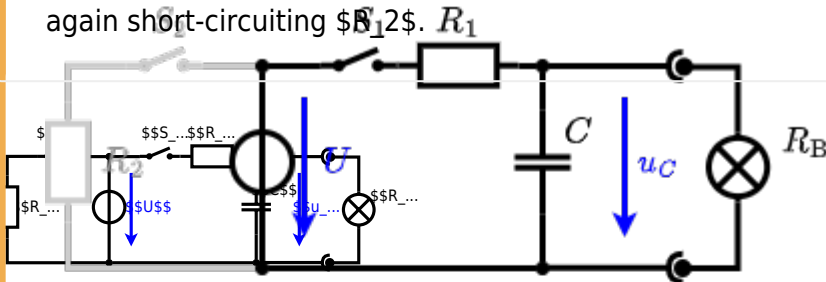

The circuit contains a voltage source  $U = 12 \text{ V}$ , a switch  $S_1$ , a resistor of  $R_1 = 20 \text{ }\Omega$  and a capacitor of  $C = 100 \text{ }\mu\text{F}$ . The switch  $S_2$  to an additional consumer  $R_2$  will be considered to be open for the first tasks. At the moment  $t_0 = 0 \text{ s}$  the switch  $S_1$  is closed, the voltage across the capacitor is  $u_c(t_0) = 0 \text{ V}$ .

.. First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time  $t_1$  when  $u_c(t_1) = 0.5 \cdot U$ .

**Solution**

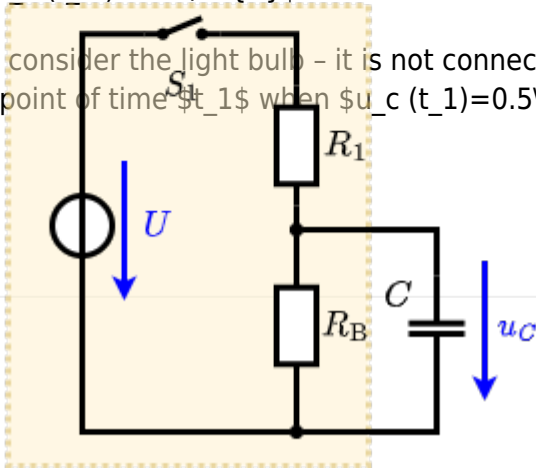

An equivalent linear voltage source can be given with  $U_s$ ,  $R_1$ , and  $R_B$  as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is:  $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$  The internal resistance is given by substituting the ideal voltage source with its resistance ( $R = 0 \Omega$ , short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t) = U_s \cdot (1 - e^{-t/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t/(10 \Omega \cdot 100 \mu F)})$$

So, here only  $R_1$  and  $C$  gives the time constant:  $\tau = R_1 \cdot C$

The following formula describes the time course of  $u_c(t)$  which has to be  $u_c(t_1) = 0.5 \cdot U$ :  $u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$   
 It has to be rearranged to  $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5)$



**Exercise E4 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)**

The following shall be simplified with  $R_1 = 200 \Omega$ ,  $R_2 = R_3 = 150 \Omega$ ,  $R_4 = 100 \Omega$  and the voltage  $U = 10 \text{ V}$  given.  $R_B$ .

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.



Since  $R_2=R_3$  and based on the equations for the transformation, the transformed  $R_Y$  is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \text{ } \Omega)^2}{3 \cdot 100 \text{ } \Omega} = \frac{1}{3} \cdot 100 \text{ } \Omega = 33.33 \text{ } \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \text{ } \Omega + (33.33 \text{ } \Omega + 400 \text{ } \Omega) \parallel (33.33 \text{ } \Omega + 100 \text{ } \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance  $R_{\text{eq}}$  between  $A$  and  $B$ .

Solution

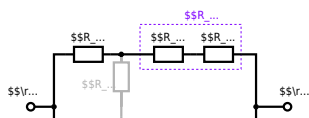

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}} = \{500 \sim \Omega \cdot 200 \sim \Omega\} \over {500 \sim \Omega + 200 \sim \Omega}$$

From:

<https://first.mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link:

[https://first.mexle.te.hs-heilbronn.de/electrical\\_engineering\\_1/ws2022\\_exam?rev=1680122568](https://first.mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680122568)

Last update: **2023/03/29 22:42**

