

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

- Exercise E5 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 3
- Exercise E6 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022) 6
- Exercise E9 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 10
- Exercise E10 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022) 11
- Exercise E11 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 11
- Exercise E12 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022) 12
- Exercise E13 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 13
- Exercise E14 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022) 16
- Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 19
- Exercise E7 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 20
- Exercise E8 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022) 21
- Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 23
- Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022) 23
- Exercise E4 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022) 24
- Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute


written test, WS2022)	25
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	26

1

**Exercise E5 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result

$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} = 4.5 \text{ V} \\ R_{\text{i}} &= R_{\text{AB}} = 6 \Omega \end{aligned}$$

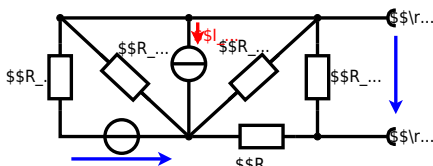


Calculated the internal resistance R_{i} and the source voltage U_{rs} of an equivalent linear voltage source on the connectors A and B .
 $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3= 10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

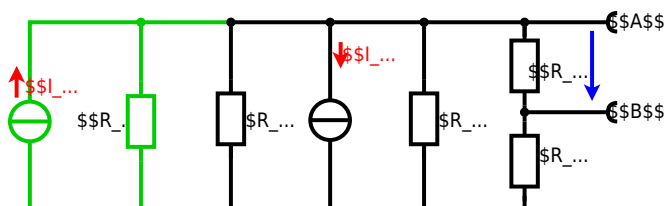

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_{24}}{R_1} - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24}$$

$$U_{24} = U_2 \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - I_4 \cdot \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5\Omega || 10\Omega || 10\Omega = 5\Omega || 5\Omega = 2.5\Omega$:


$$U_{AB} = \frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega}$$

$$R_{AB} = 15\Omega || (7.5\Omega + 2.5\Omega)$$

Exercise E6 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result


$$U_s = U_{AB} = 4.5\text{V} \quad R_i = R_{AB} = 6\Omega$$

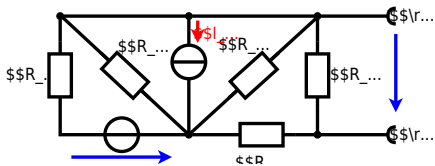


Calculated the internal resistance R_{int} and the source voltage U_{oc} of an equivalent linear voltage source on the connectors A and B .
$$R_1=5.0 \text{ } \Omega, \quad U_2=6.0 \text{ V}, \quad R_3= 10 \text{ } \Omega, \quad I_4=4.2 \text{ A}, \quad R_5=10 \text{ } \Omega, \quad R_6=7.5 \text{ } \Omega, \quad R_7=15 \text{ } \Omega$$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

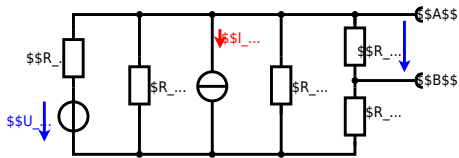

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

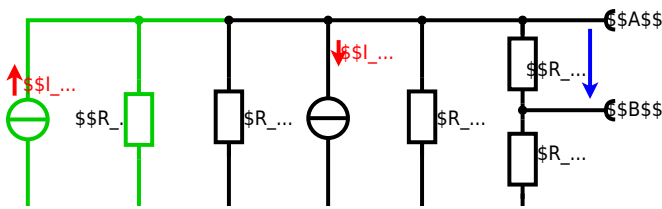

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{635}$$

$$I_{24} = \frac{U_{24}}{R_6 + R_7 + R_1 || R_3 || R_5}$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

$$U_{24} = U_{135} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega}$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

Exercise E9 Analyzing complex Impedances
(written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage \underline{U} and the phasor current \underline{I} in the circuit shown in the figure. The components (R and X_{L1}) shall be given.

After analysis, the full dimensional circuit impedance Z and the voltage \underline{U} in phasor notation $\underline{U} = (20 \text{ V} + 4 \text{ V} \cdot j) + 5 \text{ V} \cdot j$ shall be given.

Solution
.. Calculate the physical values of the components.
Solution $R = 10 \Omega$, $X_{L1} = 2 \Omega$, $X_{L2} = 2 \Omega$

Solution

$$\underline{I} = \frac{\underline{U}}{Z} = \frac{20 \text{ V} + 9 \text{ V} \cdot j}{10 \Omega + 2 \Omega + 2 \Omega + 2 \Omega + 2 \Omega + 2 \Omega + 2 \Omega + 2 \Omega}$$

The current and voltage are in phase and the circuit is purely resistive.

$$\underline{U} = 20 \text{ V} + 9 \text{ V} \cdot j = 20 \text{ V} + 9 \text{ V} \cdot j$$

$$\underline{I} = \frac{20 \text{ V} + 9 \text{ V} \cdot j}{30 \Omega} = \frac{20}{30} \text{ A} + \frac{9}{30} \text{ A} \cdot j = 0.67 \text{ A} + 0.3 \text{ A} \cdot j$$

The phase φ can be calculated as
$$\varphi = \arctan \left(\frac{\text{Im}(Z)}{\text{Re}(Z)} \right) = \arctan \left(\frac{-4.68 \text{ } \Omega}{0.24 \text{ } \Omega} \right)$$

Exercise E10 Analyzing complex Impedances
(written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phase angle φ of the total impedance Z in the circuit shown in the figure. The components R and X_L shall be given.

After analysis, the full width of the band should be extracted and given in phase φ . $Z = (2 + j4) \text{ } \Omega + 5j \text{ } \Omega$

Solution
.. Calculation of the real and imaginary parts.
Solution
$$\varphi = \arctan \left(\frac{4 + 5}{2} \right) = \arctan(5.5) \approx 81.06^\circ$$

Solution
$$Z = \frac{U}{I} = \frac{50 \text{ V}}{1 \text{ A}} = 50 \text{ } \Omega$$

The current and voltage across a phase angle of $4.68 \text{ } \Omega$ appear in the resulting impedance $Z = 0.24 \text{ } \Omega + j4.68 \text{ } \Omega$.
The real component $0.24 \text{ } \Omega$ is the absolute value of the impedance Z .
$$\varphi = \arctan \left(\frac{4.68}{0.24} \right) = \arctan(19.5) \approx 87.0^\circ$$

The absolute value of the impedance is $|Z| = \sqrt{0.24^2 + 4.68^2} \approx 4.71 \text{ } \Omega$.
With the complex part comes $\varphi = \arctan \left(\frac{4.68}{0.24} \right) \approx 87.0^\circ$.
The phase φ can be calculated as
$$\varphi = \arctan \left(\frac{\text{Im}(Z)}{\text{Re}(Z)} \right) = \arctan \left(\frac{-4.68 \text{ } \Omega}{0.24 \text{ } \Omega} \right)$$

Exercise E11 Impedances at different Frequencies
(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A circuit with a resistor $R_1 = 20 \text{ } \Omega$ and a capacitor $C_1 = 40 \text{ nF}$ is connected to an AC voltage source $U = 50 \text{ V}$ at $f = 300 \text{ kHz}$. The resistor R_1 shall have the same absolute value of the impedance as a capacitor $C_1 = 40 \text{ nF}$ at $f_1 = 4 \text{ MHz}$.

Solution

Solution

$$R_1 \&= 1.00 \sim \Omega$$

$$R_2 \&= 70.0 \sim \Omega$$

$$C_1 = 40 \sim \text{nF}$$

$$C_2 = 4.7 \sim \mu\text{F}$$

$$f = 4 \sim \text{MHz}$$

A series circuit means that the current is constant on every component.
 The equivalent impedance for R_2 and C_1 combined is given by

$$Z_{21} = R_2 + \frac{1}{j\omega C_1}$$

$$Z_{21} = 70 + \frac{1}{j \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}}$$

$$Z_{21} = 70 - j6.25 \sim \Omega$$

A parallel circuit means that the voltage is the same on R_3 and C_2

$$\frac{1}{Z_{22}} = \frac{1}{R_3} + j\omega C_2$$

$$\frac{1}{Z_{22}} = \frac{1}{10} + j \cdot 4 \cdot 10^6 \cdot 4.7 \cdot 10^{-6}$$

$$Z_{22} = \frac{1}{10 + j18.8} \sim \Omega$$

The resulting current of the parallel circuit is given as:

$$I_{22} = \frac{U}{Z_{22}} = \frac{10}{\frac{1}{10 + j18.8}} = 10(10 + j18.8) = 100 + j188 \sim \text{mA}$$

Back to the first formula:

$$R_3 \cdot I_{22} = X_{C3} \cdot I_{22} \parallel R_3$$

$$I_{22} = \frac{X_{C3} \cdot I_{22}}{R_3 + jX_{C3}}$$

$$I_{22} = \frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot C_3} \cdot \frac{100 + j188}{R_3 + jX_{C3}}$$

Exercise E12 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit means that the current is constant on every component.
 The equivalent impedance for R_2 and C_1 combined is given by

$$Z_{21} = R_2 + \frac{1}{j\omega C_1}$$

$$Z_{21} = 70 + \frac{1}{j \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}}$$

$$Z_{21} = 70 - j6.25 \sim \Omega$$

Solution

$$R_1 \&= 1.00 \sim \Omega$$

$$R_2 \&= 70.0 \sim \Omega$$

$$C_1 = 40 \sim \text{nF}$$

$$C_2 = 4.7 \sim \mu\text{F}$$

$$f = 4 \sim \text{MHz}$$

A series circuit means that the current is constant on every component.
 The equivalent impedance for R_2 and C_1 combined is given by

$$Z_{21} = R_2 + \frac{1}{j\omega C_1}$$

$$Z_{21} = 70 + \frac{1}{j \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}}$$

$$Z_{21} = 70 - j6.25 \sim \Omega$$

A parallel circuit means that the voltage is the same on R_3 and C_2

$$\frac{1}{Z_{22}} = \frac{1}{R_3} + j\omega C_2$$

$$\frac{1}{Z_{22}} = \frac{1}{10} + j \cdot 4 \cdot 10^6 \cdot 4.7 \cdot 10^{-6}$$

$$Z_{22} = \frac{1}{10 + j18.8} \sim \Omega$$

The resulting current of the parallel circuit is given as:


$$I_{22} = \frac{U}{Z_{22}} = \frac{10}{\frac{1}{10 + j18.8}} = 10(10 + j18.8) = 100 + j188 \sim \text{mA}$$


Back to the first formula:

$$R_3 \cdot I_{22} = X_{C3} \cdot I_{22} \parallel R_3$$

$$I_{22} = \frac{X_{C3} \cdot I_{22}}{R_3 + jX_{C3}}$$

$$I_{22} = \frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot C_3} \cdot \frac{100 + j188}{R_3 + jX_{C3}}$$

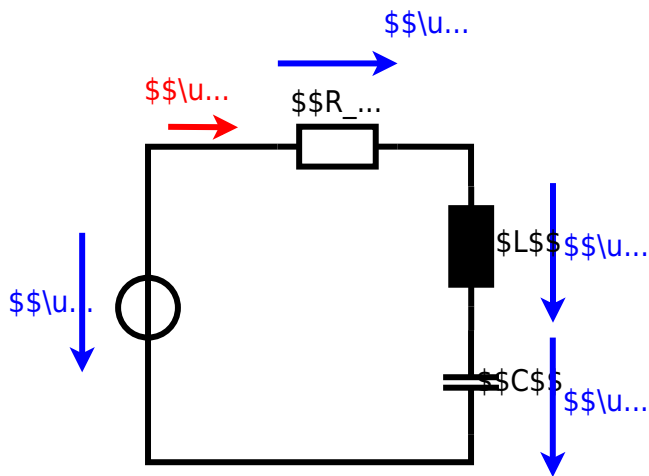

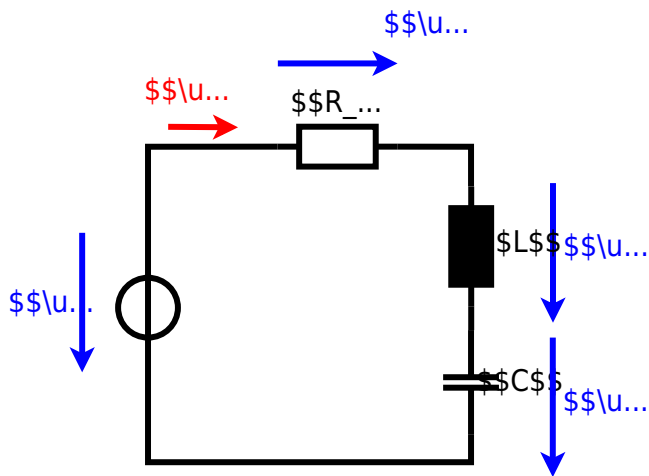


Exercise E3 Pure Resistor Network Simplification
(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at 0 Ohm, $R_1 = R_2 = R_3 = 100 \Omega$ and the switch is given. R_B .

Solution

$$R_{eq} = 133.8 \Omega$$

Now a wye-delta transformation is necessary.

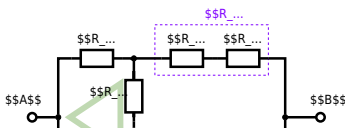

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel (R_Y + R_2)$$

The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

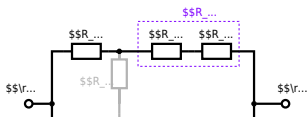

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim \Omega + 200 \sim \Omega + 200 \sim \Omega) \parallel (100 \sim \Omega + 100 \sim \Omega) \parallel R_{\text{eq}}$$

$$R_{\text{eq}} = (500 \sim \Omega) \parallel (200 \sim \Omega) \parallel R_{\text{eq}} = \frac{\{500 \sim \Omega \cdot 200 \sim \Omega\}}{500 \sim \Omega + 200 \sim \Omega}$$


Exercise E7 Charging Capacitors
 (written test, approx. 16 % of a 60-minute written test, WS2022)

The capacitor is initially open, the voltage across the capacitor is again U_0 at the moment $t_0 = 0$ s when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1$ ms after closing the switch.


Result: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

$$U_{\text{eq}} = \frac{U \cdot R_2}{R_1 + R_2} \quad R_{\text{eq}} = R_1 \parallel R_2 = \frac{R_1 \cdot R_2}{R_1 + R_2}$$

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

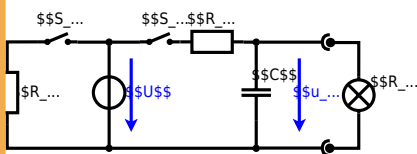


The circuit contains a voltage source $U=12\text{ V}$, a switch S_1 , a resistor of $R_1=20\text{ }\Omega$ and a capacitor of $C=100\text{ }\mu\text{F}$. The switch S_2 to an additional consumer R_2 will be considered to be open for the first task. At the moment $t_0=0\text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0)=0\text{ V}$.

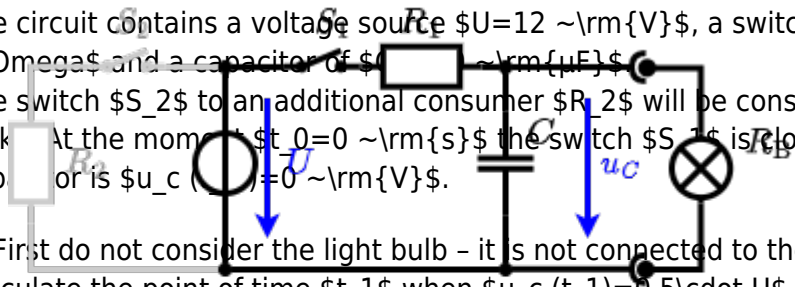

First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1)=0.5 \cdot U$.

Solution

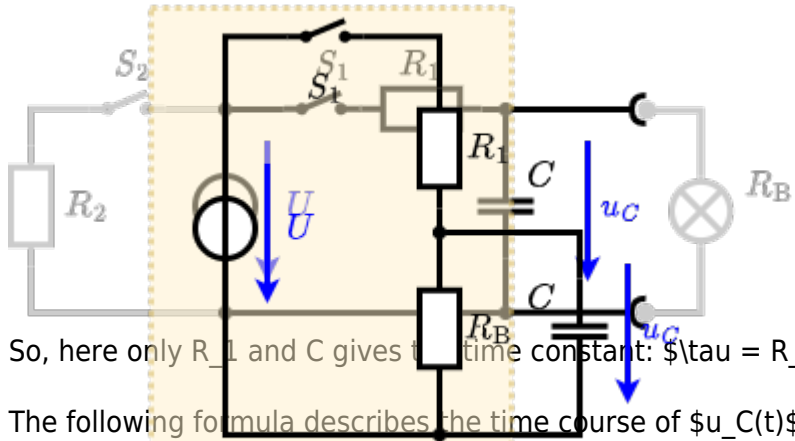

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1)=0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$.
 An equivalent linear voltage source can be given with U_s , R_1 and R_B as seen in yellow:

$$\tau = R_1 \cdot C \cdot \ln(0.5)$$

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($r=0\text{ }\Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10\text{ }\Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1\text{ ms}/(10\text{ }\Omega \cdot 100\text{ }\mu\text{F})})$$

Exercise E8 Charging Capacitors
 (written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (as shown in the figure) consists of a DC voltage source $U=6\text{ V}$, a resistor $R_1=20\text{ }\Omega$, a capacitor $C=20\text{ }\mu\text{F}$ and a light bulb $R_B=20\text{ }\Omega$. The switch S_1 is open. The voltage across the capacitor is again 0 V at the moment $t_0=0\text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2=1\text{ ms}$ after closing the switch.

Solution To solve this, first create an equivalent linear voltage source from U , R_1 , and R_B .


$$U_s = U \cdot \frac{R_B}{R_1 + R_B} = 3\text{ V}$$

$$R_i = R_1 \parallel R_B = 10\text{ }\Omega$$

Solution

The ideal voltage source is $U = 12 \text{ V}$. The internal resistance is $R_1 = 20 \text{ }\Omega$. The voltage across the capacitor is u_C . The voltage across the light bulb is u_B . The voltage across the resistor R_2 is u_{R_2} . The voltage across the capacitor is u_C . The voltage across the light bulb is u_B . The voltage across the resistor R_2 is u_{R_2} .


On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

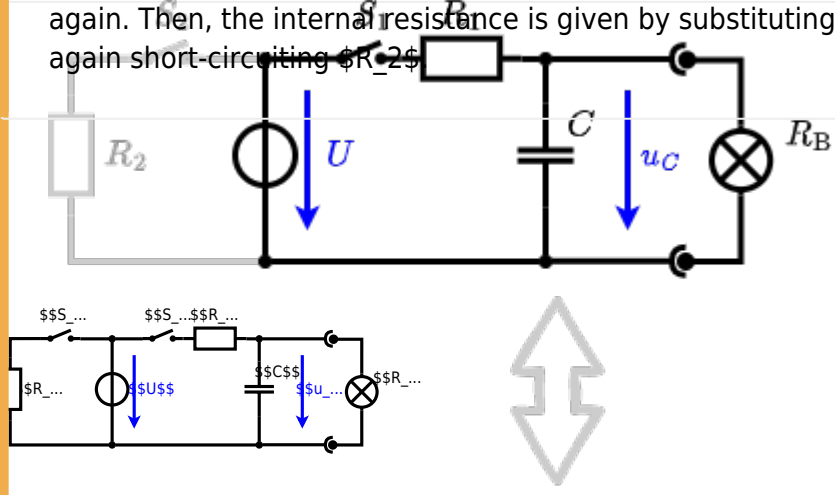

The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ }\Omega$ and a capacitor of $C = 100 \text{ }\mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0$ the switch S_1 is closed, the voltage across the capacitor is $u_C(t_0) = 0$.

First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_C(t_1) = 0.5 \cdot U$.

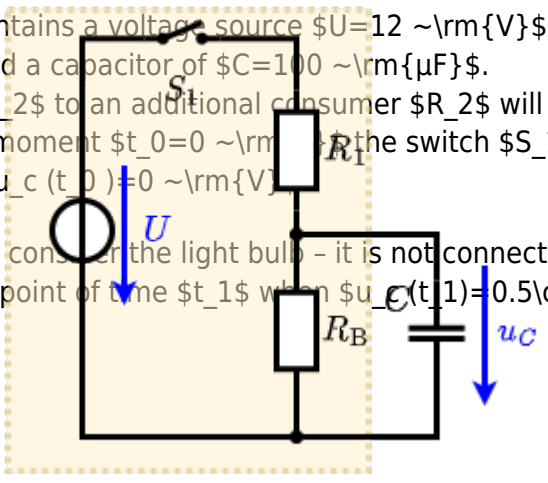

Solution

An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($R = 0 \text{ }\Omega$, short-circuit). $R_i = R_1 \parallel R_B = 10 \text{ }\Omega$.

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2 / (R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t_2 / (10 \text{ }\Omega \cdot 100 \text{ }\mu\text{F})})$$

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$: $u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$. It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies -t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator, explains a thermoelectric resistance in a refrigeration system. The thermistor has a resistance of $10 \text{ k}\Omega$ at 25°C . Its temperature coefficients are: $\alpha=0.01 \text{ K}^{-1}$ and $\beta=71 \cdot 10^{-6} \text{ K}^{-2}$.

Result
The temperature inside the refrigeration system can reach down to -40°C .

Calculate the resistance of the thermistor at -40°C .

$$R = 6.5 \text{ k}\Omega$$

The power transfer is reduced by a factor of 10. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

```
\begin{align*} R &= R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) && | \\ \text{\textit{with } } \Delta T &= T_{\text{end}} - T_{\text{start}} \\ R &= 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right) \\ \end{align*}
```

Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator, explains a thermoelectric resistance in a refrigeration system. The thermistor has a resistance of $10 \text{ k}\Omega$ at 25°C . Its temperature coefficients are: $\alpha=0.01 \text{ K}^{-1}$ and $\beta=71 \cdot 10^{-6} \text{ K}^{-2}$.

Result
The temperature inside the refrigeration system can reach down to -40°C .

Calculate the resistance of the thermistor at -40°C .

$$R = 6.5 \text{ k}\Omega$$

The power transfer is reduced by a factor of 10. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

```
\begin{align*} R &= R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) && | \\ \text{\textit{with } } \Delta T &= T_{\text{end}} - T_{\text{start}} \\ R &= 10 \text{ k}\Omega \cdot \left(1 + 0.01 \text{ K}^{-1} \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \text{ K}^{-2} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right) \\ \end{align*}
```


Exercise E4 Pure Resistor Network Simplification
(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at once, $R_2 = R_3 = 100 \Omega$ and the switch shall be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

$$R_{eq} = 133.8 \Omega$$

Now a wye-delta transformation is necessary.

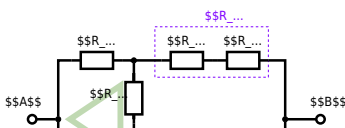

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

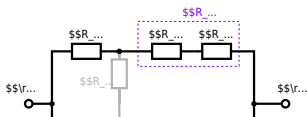

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \sim\Omega + 200 \sim\Omega + 200 \sim\Omega) \parallel (100 \sim\Omega + 100 \sim\Omega) \parallel R_{\text{eq}} = (500 \sim\Omega) \parallel (200 \sim\Omega) \parallel R_{\text{eq}} = \frac{500 \sim\Omega \cdot 200 \sim\Omega}{500 \sim\Omega + 200 \sim\Omega}$$

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

2. The heating element is used to heat the wire with a temperature of $180 \sim\text{C}$. Electric power dissipation (= heat flow) of $P=40 \sim\text{W}$ is necessary. Determine the current I needed to operate it for heating elements. The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \sim\Omega \cdot \text{m}$.

The heating element is $3 \sim\text{m}$ long and has a diameter of $3.57 \sim\text{mm}$.
 Solution: Calculate the resistance R of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \sim\text{W}}{0.33 \sim\Omega}}$$

$$R = \rho \cdot \frac{l}{A} \quad | \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \quad \parallel \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \parallel \quad R = 1.10 \cdot 10^{-6} \sim\Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \sim\text{m}}{(3.57 \cdot 10^{-3} \sim\text{m})^2 \cdot \pi}$$

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

2. Heating element made of solid nichrome wire with a temperature coefficient of $1.80 \cdot 10^{-5} \text{ } ^\circ\text{C}^{-1}$. Electric power dissipation (= heat flow) of $P=40 \text{ W}$ is necessary.

Calculate the current I needed to operate it.

The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

∴ Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \\ &= \sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \text{with } A = r^2 \cdot \pi = \\ &= \frac{1}{4} d^2 \cdot \pi \quad R = \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad R = \\ &= 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

From:

<https://first.mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link:

https://first.mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680241634

Last update: 2023/03/31 07:47

