

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	3
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	3
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	3
Exercise E2 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	4
Exercise E3 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	5
Exercise E4 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	6
Exercise E5 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	8
Exercise E6 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	12
Exercise E7 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	16
Exercise E8 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	17
Exercise E9 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	19
Exercise E10 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	19
Exercise E11 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	20
Exercise E12 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	20
Exercise E13 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written	

test, WS2022)	21
Exercise E14 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	24

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of solid nichrome wire with a diameter of $d = 0.357 \text{ mm}$ and a length of $l = 3 \text{ m}$ is used for heating elements. The electric power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary.

Determine the current I and the voltage U for heating elements.

The Nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m}$.

The heating element is $l = 3 \text{ m}$ long and has a diameter of $d = 0.357 \text{ mm}$.

∴ Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} \\ &= \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \\ R &= \rho \cdot \frac{l}{\frac{1}{4} d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)

A heating element made of solid nichrome wire with a diameter of $d = 0.357 \text{ mm}$ and a length of $l = 3 \text{ m}$ is used for heating elements. The electric power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary.

Determine the current I and the voltage U for heating elements.

The Nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m}$.

The heating element is $l = 3 \text{ m}$ long and has a diameter of $d = 0.357 \text{ mm}$.

∴ Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} \\ &= \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad | \quad \text{with } A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \\ R &= \rho \cdot \frac{l}{\frac{1}{4} d^2 \cdot \pi} \quad | \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \cdot \text{m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

Exercise E2 Temperature-dependent Resistance

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator exhibits a temperature coefficient of resistance in a refrigeration system. The refrigerator has a resistance of $10 \text{ k}\Omega$ at 25°C . Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result: The temperature inside the refrigeration system can reach down to -40°C .

Calculate the resistance of the thermal sensor at -40°C .

The power transfer resistor P is a part of the circuit and generates heat. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right)$$

Exercise E2 Temperature-dependent Resistance

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A refrigerator exhibits a temperature coefficient of resistance in a refrigeration system. The refrigerator has a resistance of $10 \text{ k}\Omega$ at 25°C . Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$.

Result: The temperature inside the refrigeration system can reach down to -40°C .

Calculate the resistance of the thermal sensor at -40°C .

The power transfer resistor P is a part of the circuit and generates heat. Therefore, a solution is to increase the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

$$R = 10 \text{ k}\Omega \cdot \left(1 + 0.01 \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2\right)$$

Exercise E3 Pure Resistor Network Simplification
(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved at once, $R_2 = R_3 = 100 \Omega$ and the value of R_1 is given. $R_1 = 400 \Omega$. Calculate the equivalent resistance R_{eq} between A and B .

Solution

$$R_{eq} = 133.8 \Omega$$

Now a wye-delta transformation is necessary.



Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:

$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel (R_Y + R_2)$$

$$= 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution



The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel (500 \Omega) \parallel (200 \Omega) \parallel (500 \Omega \cdot 200 \Omega) / (500 \Omega + 200 \Omega)$$


Exercise E4 Pure Resistor Network Simplification
 (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved with $R_1 = 200 \Omega$, $R_2 = R_3 = 100 \Omega$ and the source $B = 15 \text{ V}$.
 Result given: $R_{\text{eq}} = 132.8 \Omega$.

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

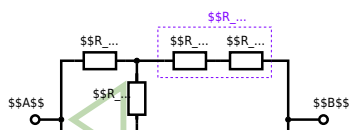


Since $R_2=R_3$ and based on the equations for the transformation, the transformed R_Y is given as:
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \Omega)^2}{3 \cdot 100 \Omega} = \frac{1}{3} \cdot 100 \Omega = 33.33 \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:
$$R_{eq} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{eq} = 33.33 \Omega + (33.33 \Omega + 400 \Omega) \parallel (33.33 \Omega + 100 \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B.

Solution

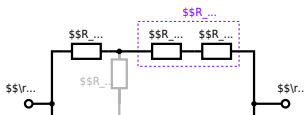

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_{-1}) \parallel (R_2 + R_2) \parallel R_{\text{eq}} = (100 \Omega + 200 \Omega + 200 \Omega) \parallel (100 \Omega + 100 \Omega) \parallel R_{\text{eq}} = (500 \Omega) \parallel (200 \Omega) \parallel R_{\text{eq}} = \frac{500 \Omega \cdot 200 \Omega}{500 \Omega + 200 \Omega} \parallel$$

**Exercise E5 Equivalent linear Source
(written test, approx. 14 % of a 60-minute written test, WS2022)**

The circuit in the following has to be simplified.
Result

$$U_{\text{s}} = U_{\text{AB}} = 4.5 \text{ V} \quad R_{\text{i}} = R_{\text{AB}} = 6 \Omega$$



Calculate the internal resistance R_{in} and the source voltage U_{s} of an equivalent linear voltage source on the connectors A and B . $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3=10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$. Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :



Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{6135}$$

$$U_{24} = U_2 \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} - I_4 \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} - \left(\frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \frac{6.0\text{V}}{5.0\Omega} - 4.2\Omega \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \parallel R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

Exercise E6 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result

$$U_s = U_{AB} = 4.5\text{V} \parallel R_i = R_{AB} = 6\Omega$$



Calculate the internal resistance R_i and the source voltage U_s of an equivalent linear voltage source on the connectors A and B. $R_1=5.0 \Omega$, $U_2=6.0 \text{ V}$, $R_3=10 \Omega$, $I_4=4.2 \text{ A}$, $R_5=10 \Omega$, $R_6=7.5 \Omega$, $R_7=15 \Omega$. Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:



The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :



Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135} + I_{24} \cdot R_4$$

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - I_4 \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} - (U_2 \cdot \frac{1}{R_1} - I_4) \cdot \frac{R_7 \cdot R_1 || R_3 || R_5}{R_6 + R_7 + R_1 || R_3 || R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0 \Omega$, so a short-circuit):

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \frac{6.0 \text{ V}}{5.0 \Omega} - 4.2 \Omega \cdot \frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega}$$

$$R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

Exercise E7 Charging Capacitors
(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit below is a RC circuit consisting of a DC voltage source U , a resistor R_1 , a resistor R_2 , a capacitor C , and a switch S_1 . The switch S_1 is initially open. The voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution: The ideal voltage source U_{eq} is given by $U_{eq} = U \cdot \frac{R_2}{R_1 + R_2}$ and the internal resistance $R_{eq} = R_1 || R_2$.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .



The circuit contains a voltage source $U=12\text{ V}$, a switch S_1 , a resistor of $R_1=20\text{ }\Omega$ and a capacitor of $C=100\text{ }\mu\text{F}$. The switch S_2 to an additional consumer R_2 will be considered to be open for the first task. At the moment $t_0=0\text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0)=0\text{ V}$.



First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1)=0.5 \cdot U$.

Solution



So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1)=0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$. An equivalent linear voltage source can be given with U_s , R_1 and R_B as seen in yellow:

$$\tau = R_1 \cdot C \cdot \ln(0.5)$$

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = 1/2 \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($r=0\text{ }\Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10\text{ }\Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1\text{ ms}/(10\text{ }\Omega \cdot 100\text{ }\mu\text{F})})$$

Exercise E8 Charging Capacitors
 (written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit (see the solution) consists of a 12 V DC voltage source, a $20\text{ }\Omega$ resistor, a $100\text{ }\mu\text{F}$ capacitor, a $20\text{ }\Omega$ resistor, and a light bulb ($6\text{ }\Omega$). The voltage across the capacitor is again 0 V at the moment $t_0=0\text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2=1\text{ ms}$ after closing the switch.

Solution To solve this, first create an equivalent linear voltage source from U , R_1 , and R_B .

$$U_s = U \cdot \frac{R_B}{R_1 + R_B} = 6\text{ V}$$

$$R_i = R_1 \parallel R_B = 15\text{ }\Omega$$

Solution

The ideal voltage source is $U = 12 \text{ V}$. The internal resistance is $R_1 = 20 \text{ }\Omega$. The voltage across the capacitor is u_C . The voltage across the light bulb is u_B . The voltage across the resistor R_2 is u_{R_2} . The voltage across the capacitor is u_C . The voltage across the light bulb is u_B . The voltage across the resistor R_2 is u_{R_2} .

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .




The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \text{ }\Omega$ and a capacitor of $C = 100 \text{ }\mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first asks. At the moment $t_0 = 0$ the switch S_1 is closed, the voltage across the capacitor is $u_C(t_0) = 0$.

First do not consider the light bulb - it is not connected to the RC circuit.

Calculate the point of time t_1 when $u_C(t_1) = 0.5 \cdot U$.

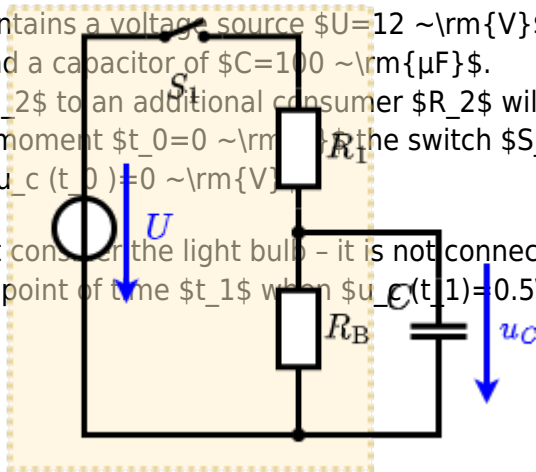

Solution

An equivalent linear voltage source can be given with U , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($R = 0 \text{ }\Omega$, short-circuit). $R_i = R_1 \parallel R_B = 10 \text{ }\Omega$.

$$u_C(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t_2/(10 \text{ }\Omega \cdot 100 \text{ }\mu\text{F})})$$

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_C(t)$ which has to be $u_C(t_1) = 0.5 \cdot U$: $u_C(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$. It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5 \implies e^{-t/\tau} = 0.5 \implies t/\tau = \ln(0.5) \implies t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$

Exercise E9 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Given that the phasor voltage source $\underline{U} = 50 \angle 0^\circ \text{ V}$ and the admittance $\underline{Y} = 0.24 \text{ S}$ are both in the components. ($\$R\$$ and $\$X_L\$$) shall be given.

After analysis, the full width dimensioned current \underline{I} and the active power P shall be extracted and given in phase. (in A and W)

Solution
.. Calculation of physical values of the two components.
Solution $\begin{aligned} R &= \frac{1}{0.24} = 4.17 \text{ } \Omega \\ X_L &= \frac{1}{0.24} = 4.17 \text{ } \Omega \end{aligned}$

Solution
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \text{with } \underline{Z} = \frac{1}{\underline{Y}} = \frac{1}{0.24} = 4.17 \text{ } \Omega$$

The current \underline{I} is $\underline{I} = \frac{50 \angle 0^\circ}{4.17} = 12 \angle 0^\circ \text{ A}$
The active power P is $P = \text{Re}\{\underline{U} \cdot \underline{I}^*\} = 50 \cdot 12 = 600 \text{ W}$
The phase φ is $\varphi = \arg(\underline{U}) - \arg(\underline{I}) = 0^\circ - 0^\circ = 0^\circ$

Exercise E10 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Given that the phasor voltage source $\underline{U} = 50 \angle 0^\circ \text{ V}$ and the admittance $\underline{Y} = 0.24 \text{ S}$ are both in the components. ($\$R\$$ and $\$X_L\$$) shall be given.

After analysis, the full width dimensioned current \underline{I} and the active power P shall be extracted and given in phase. (in A and W)

Solution
.. Calculation of physical values of the two components.
Solution $\begin{aligned} R &= \frac{1}{0.24} = 4.17 \text{ } \Omega \\ X_L &= \frac{1}{0.24} = 4.17 \text{ } \Omega \end{aligned}$

Solution
$$\underline{I} = \frac{\underline{U}}{\underline{Z}} \quad \text{with } \underline{Z} = \frac{1}{\underline{Y}} = \frac{1}{0.24} = 4.17 \text{ } \Omega$$

The current \underline{I} is $\underline{I} = \frac{50 \angle 0^\circ}{4.17} = 12 \angle 0^\circ \text{ A}$
The active power P is $P = \text{Re}\{\underline{U} \cdot \underline{I}^*\} = 50 \cdot 12 = 600 \text{ W}$
The phase φ is $\varphi = \arg(\underline{U}) - \arg(\underline{I}) = 0^\circ - 0^\circ = 0^\circ$

The absolute value of the impedance is $|Z| = \sqrt{R^2 + X^2} = \sqrt{1.00^2 + 4.68^2} = 4.70 \text{ } \Omega$
 The phase φ is $\varphi = \arctan\left(\frac{X}{R}\right) = \arctan\left(\frac{4.68}{1.00}\right) = 77.8^\circ$
 With the complex part comes the physical value: $X_{L\omega} = \omega L = 4.68 \text{ } \Omega$
 The phase φ is $\varphi = \arctan\left(\frac{X_{L\omega}}{R}\right) = \arctan\left(\frac{4.68}{1.00}\right) = 77.8^\circ$
 The phase φ is $\varphi = \arctan\left(\frac{X_{L\omega}}{R}\right) = \arctan\left(\frac{4.68}{1.00}\right) = 77.8^\circ$

Exercise E11 Impedances at different Frequencies
 (written test, approx. 18 % of a 60-minute written test, WS2022)

At a series circuit with a resistor $R_1 = 1.00 \text{ } \Omega$, a capacitor $C_1 = 40 \text{ nF}$ and an inductor $L_1 = 4.7 \text{ } \mu\text{H}$ in AC with a voltage $U = 10 \text{ V}$ and a frequency $f = 450 \text{ kHz}$.
 Result: $R_1 = 1.00 \text{ } \Omega$, $X_{C1} = -j79.6 \text{ } \Omega$, $X_{L1} = j0.10 \text{ } \Omega$, $Z = 1.00 - j79.6 + j0.10 = 1.00 - j79.5 \text{ } \Omega$
 A resistor R_1 shall have the same absolute value of the impedance as a capacitor $C_1 = 40 \text{ nF}$ at $f_1 = 4 \text{ MHz}$.

Solution
 Solution $R_1 = 1.00 \text{ } \Omega$
 Solution $R_2 = 10.0 \text{ } \Omega$
 A series circuit means that the current is constant on every component.
 The equivalent impedance for R and L combined is given by $Z = R + jX_L$
 Parallel circuit means that the voltage is the same on R_2 and C_2
 $\frac{1}{Z} = \frac{1}{R_2} + \frac{1}{X_{C2}}$
 $Z = \frac{R_2 X_{C2}}{R_2 + X_{C2}}$
 $Z = \frac{10 \cdot (-j79.6)}{10 - j79.6} = \frac{-j796}{10 - j79.6} = \frac{-j796(10 + j79.6)}{(10 - j79.6)(10 + j79.6)} = \frac{-j7960 + 63496}{100 + 6336} = \frac{63496 - j7960}{6436} = 9.87 - j1.24 \text{ } \Omega$
 The resulting current of the parallel circuit is given as:
 $I = \frac{U}{Z} = \frac{10}{9.87 - j1.24} = \frac{10(9.87 + j1.24)}{(9.87 - j1.24)(9.87 + j1.24)} = \frac{98.7 + j12.4}{100 + 1.54} = \frac{98.7 + j12.4}{101.54} = 0.972 + j0.122 \text{ A}$
 This current is the same as the current through R_1 and C_1
 $I = \frac{U}{Z} = \frac{10}{1.00 - j79.5} = \frac{10(1.00 + j79.5)}{(1.00 - j79.5)(1.00 + j79.5)} = \frac{10 + j795}{100 + 6316} = \frac{10 + j795}{6416} = 0.00156 + j0.124 \text{ A}$
 Back to the first formula: $R_2 \cdot I = X_{C2} \cdot I$
 $R_2 = \frac{X_{C2} \cdot I}{I} = \frac{-j79.6 \cdot (0.00156 + j0.124)}{0.00156 + j0.124} = \frac{-j12.4 + 9.87}{0.00156 + j0.124} = \frac{9.87 - j12.4}{0.00156 + j0.124} = 10.0 - j79.6 \text{ } \Omega$

Exercise E12 Impedances at different Frequencies
 (written test, approx. 18 % of a 60-minute written test, WS2022)

Resistor R_1 shall have the same absolute value of the impedance as a capacitor $C_1 = 40 \text{ nF}$ at $f_1 = 4 \text{ MHz}$.

Solution

$$R_1 = 1.00 \text{ } \Omega$$

$$R_2 = 10.0 \text{ } \Omega$$

A series circuit means that the current is constant on every component.

The equivalent impedance for R and L combined is given by

$$Z_{RL} = R + j\omega L$$

Parallel circuit means that the voltage is the same on R_2 and C_1

$$Z_{RC} = \frac{R_2 \cdot (-j/\omega C_1)}{R_2 - j/\omega C_1}$$

Since Z_{RC} is perpendicular to Z_{RL} , the resulting current of the parallel circuit is given as:

$$I_{3R} = I_{3R} + I_{3C}$$

This can be simplified to:

$$I_{3R} = \frac{U}{\sqrt{R^2 + (\omega L)^2}} + \frac{U}{\sqrt{R^2 + (1/\omega C)^2}}$$

Back to the first formula:

$$R_3 \cdot I_{3R} = X_{3C} \cdot I_{3R} \cdot \frac{I_{3R}}{I_{3R}} = X_{3C} \cdot \frac{I_{3R}}{I_{3R}} = \frac{1}{2\pi \cdot f \cdot C_3} \cdot \frac{I_{3R}}{I_{3R}}$$

Exercise E13 Complex Impedance Circuit
 (written test, approx. 15 % of a 60-minute written test, WS2022)

1. Calculate the current $i(t)$ through the resistor R in the circuit shown in the figure. The voltage source is $u(t) = 3.0 \text{ V} \cdot \sin(2\pi \cdot 15 \text{ kHz} \cdot t)$.

Solution

Result

$$Z = 48.2 \text{ } \Omega \quad Z_C = 19.8 \text{ } \Omega$$

Draw the circuit diagram of the given circuit with all components, voltages, and currents.

$$Z = \frac{U}{I} \quad I = \frac{U}{Z}$$

$$Z_C = \frac{1}{2\pi \cdot f \cdot C} = \frac{1}{2\pi \cdot 15 \text{ kHz} \cdot 0.22 \text{ } \mu\text{F}}$$

With $f = 15 \text{ kHz}$

$$Z_C = \frac{1}{2\pi \cdot 15 \text{ kHz} \cdot 330 \text{ } \mu\text{H}}$$

$$\underline{Z} = R + \underline{Z}_L + \underline{Z}_C = R + j\omega L - j\omega C$$

$$\underline{Z} = \sqrt{R^2 + (\omega L - \omega C)^2}$$

□□□□□□□□□□ 10510...



Exercise E14 Complex Impedance Circuit
(written test, approx. 15 % of a 60-minute written test, WS2022)

1. Calculate the circuit impedance Z and the effective value $|Z|$ and the effective value $|I|$ in the voltage source $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$ V. The linear source is connected with an inductor of $330 \mu\text{H}$ and a capacitor of $0.22 \mu\text{F}$, all in series.

Result: $Z = 19.8 \cdot (1 - j) \Omega$ and $|Z| = 28.2 \Omega$

Draw the circuit diagram of the given circuit and label all components, voltages, and currents.

$$Z = \frac{U}{I} \quad I = \frac{U}{Z} \quad Z_C = \frac{1}{2\pi \cdot f \cdot C} = \frac{1}{2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6}} \approx 391.2 \Omega$$

$$Z_L = 2\pi \cdot f \cdot L = 2\pi \cdot 15 \cdot 330 \cdot 10^{-6} \approx 3.14 \Omega$$

$$Z = R + jZ_L - jZ_C = 0 + j3.14 - j391.2 = -j388.06 \Omega$$

$$|Z| = \sqrt{R^2 + (Z_L - Z_C)^2} = \sqrt{0^2 + (-388.06)^2} \approx 388.06 \Omega$$

$$I = \frac{U}{|Z|} = \frac{3.0}{388.06} \approx 0.0077 \text{ A} = 7.7 \text{ mA}$$

$$\underline{Z} = R + jZ_L - jZ_C = 0 + j3.14 - j391.2 = -j388.06 \Omega$$

$$|Z| = \sqrt{R^2 + (Z_L - Z_C)^2} = \sqrt{0^2 + (-388.06)^2} \approx 388.06 \Omega$$

$$I = \frac{U}{|Z|} = \frac{3.0}{388.06} \approx 0.0077 \text{ A} = 7.7 \text{ mA}$$

$$\underline{Z} = R + jZ_L - jZ_C = 0 + j3.14 - j391.2 = -j388.06 \Omega$$

$$|Z| = \sqrt{R^2 + (Z_L - Z_C)^2} = \sqrt{0^2 + (-388.06)^2} \approx 388.06 \Omega$$

$$I = \frac{U}{|Z|} = \frac{3.0}{388.06} \approx 0.0077 \text{ A} = 7.7 \text{ mA}$$

$$\underline{Z} = R + jZ_L - jZ_C = 0 + j3.14 - j391.2 = -j388.06 \Omega$$

$$|Z| = \sqrt{R^2 + (Z_L - Z_C)^2} = \sqrt{0^2 + (-388.06)^2} \approx 388.06 \Omega$$

$$I = \frac{U}{|Z|} = \frac{3.0}{388.06} \approx 0.0077 \text{ A} = 7.7 \text{ mA}$$

$$\underline{Z} = R + jZ_L - jZ_C = 0 + j3.14 - j391.2 = -j388.06 \Omega$$

$$|Z| = \sqrt{R^2 + (Z_L - Z_C)^2} = \sqrt{0^2 + (-388.06)^2} \approx 388.06 \Omega$$

$$I = \frac{U}{|Z|} = \frac{3.0}{388.06} \approx 0.0077 \text{ A} = 7.7 \text{ mA}$$

$$\underline{Z} = R + jZ_L - jZ_C = 0 + j3.14 - j391.2 = -j388.06 \Omega$$

$$|Z| = \sqrt{R^2 + (Z_L - Z_C)^2} = \sqrt{0^2 + (-388.06)^2} \approx 388.06 \Omega$$

$$I = \frac{U}{|Z|} = \frac{3.0}{388.06} \approx 0.0077 \text{ A} = 7.7 \text{ mA}$$

$$\underline{Z} = R + jZ_L - jZ_C = 0 + j3.14 - j391.2 = -j388.06 \Omega$$

$$|Z| = \sqrt{R^2 + (Z_L - Z_C)^2} = \sqrt{0^2 + (-388.06)^2} \approx 388.06 \Omega$$



From:
<https://first.mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link:
https://first.mexle.te.hs-heilbronn.de/electrical_engineering_1/ws2022_exam?rev=1680355460

Last update: **2023/04/01 15:24**

