

task_dtoqvpvrbdtdcozfk_with_calculation

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exercise E2 Electrostatics I (written test, approx. 10 % of a 120-minute written test, SS2022)

..... 2

Exercise E2 Electrostatics I

(written test, approx. 10 % of a 120-minute written test, SS2022)

2. What will be the magnitude of the net drag force on the particle due to the four forces shown? The values of the four forces are $F_1 = 4\text{ N}$, $F_2 = 5\text{ N}$, $F_3 = 4\text{ N}$, and $F_4 = 5\text{ N}$. Which value needs F_4 to have to get a resulting force of 0 N on the particle?

Path: $q_0 = -1 \sim \text{rm nC\$}$

- $q_1 = -2 \text{ nC}$

$$\text{path}\$Es4.4310.97\text{--}\text{r}\text{f}\text{f}\backslash\text{rm}\text{m}\backslash\text{C}\text{over}\{\backslash\text{rm}\text{m}\}\}\$$$

- $\vec{F}_{01} = \left(\begin{array}{ccc} 19.97 & \sim \mu N & 0 \end{array} \right)$

With the `left` and `right` components we can calculate the resulting magnitude of the

the perpendicularity of the two planes. The perpendicularity of the two planes is defined as the ratio of the perpendicular distance from the origin to the plane to the distance from the origin to the plane along the direction of the plane. The perpendicularity of the two planes is defined as the ratio of the perpendicular distance from the origin to the plane to the distance from the origin to the plane along the direction of the plane. The perpendicularity of the two planes is defined as the ratio of the perpendicular distance from the origin to the plane to the distance from the origin to the plane along the direction of the plane.

$$\|\vec{F}\| = \sqrt{\left(\sum_i F_{i,x}\right)^2 + \left(\sum_i F_{i,y}\right)^2}$$

In the flowgraph, 0.3 feet (left) for beginning of pipe (any ≤ 19.05 feet) $m = N_1$ $N_2 = 19.05$

Here, this fee must be paid for each fee \$/year (Feb 1013) \$ from \$9.00 on \$9.00:

$$\text{Verim}(\text{align}(\text{d} \setminus \text{vec} \{E\} \cdot \{01\}) \mid \& \equiv |E| \cdot 4 \mid \cdot |q \cdot 0| \setminus \rightarrow E \cdot 4 \& \equiv$$

```
{width} {height} {angle}}_{01}} &= |E_4| \langle \text{cool } q_0 \rangle \setminus \text{rightarrow } E_4 &= \\ f(\text{low } q_0) \setminus \text{over } (q_0)) &= f(10^6) \cdot \text{dot } 10^{6.6} \cdot r
```


$$\frac{\|\vec{F}_{01}\|}{|q_0|} \approx \frac{19.97 \dots \cdot 10^{-6}}{1} \sim \text{N}$$

$$\dot{10}^{-9} \sim \text{C}} \} \} \parallel \&= 19.97... \cdot 10^3 \{ \{ \text{N} \} \over \{ \text{C} \} \} \} \parallel \&=$$

$$19.97... \cdot 10^3 \left\{ \frac{\text{VAs/m}}{\text{As}} \right\} \parallel \&= 19.97... \cdot 10^3 \left\{ \frac{\text{VAs/m}}{\text{As}} \right\}$$

$$\sqrt{\frac{1}{m}}$$

```
\f{\over\{\\|\\|\\|\\}\} \f{\end\{align\}}
```

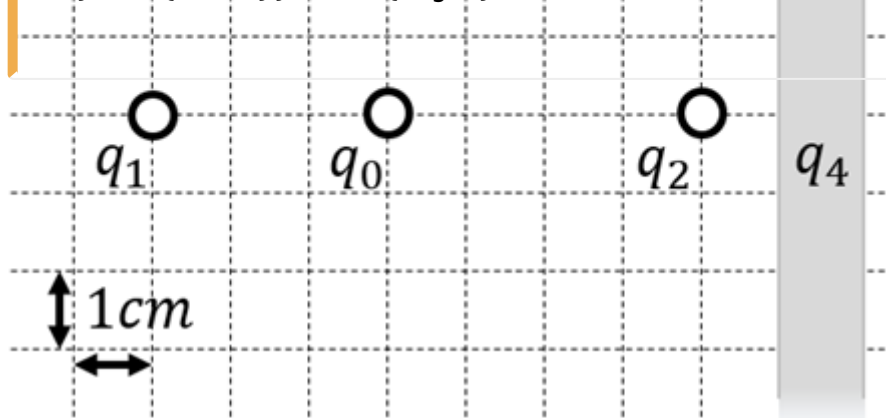

1. Calculate the single forces $\vec{F}_{01}$, $\vec{F}_{02}$, $\vec{F}_{03}$, on the charge q_0 !

Path

First, calculate the magnitude of the forces, like $|\vec{F}_1|$.

The force $\vec{F}$ is purely on the x -axis and therefore equal to

$$\vec{F} \{01,x\} = F \{01,x\}$$

$$\frac{\{1\}}{4\pi\epsilon}\cdot\{q_1\cdot q_0\}^{r^2\{0\}} \quad \&=$$

$$\frac{\{1\}}{\{4\pi\}} \cdot 8.854 \cdot 10^{-12} \sim \text{As/Vm} \} \cdot \{1 \cdot 10^{-9}$$

$$\frac{\{1\} \over \{4\} \pi \cdot 0.854 \cdot 10^{-12}}{\sim \text{m As/Vm}} \cdot \{1 \cdot 10^{-9} \sim \text{m C} \cdot 2 \cdot 10^{-9}\} \sim \text{m C} \over \{3 \cdot 10^{-2} \sim \text{m m}\}^2 \} \quad \&=$$

$$\frac{\rho_{\text{C}} \cdot Z \cdot 10^{-9}}{\rho_{\text{C}} \cdot \frac{(3 \cdot 10^{-2})^2}{Z}} \approx 19.97 \dots \cdot 10^{-6} \text{ } \frac{\text{As}^2 \cdot \text{Vm}}{\text{As} \cdot \text{m}^2} = 19.97 \dots$$

$\cdot 10^{-6} \text{ VAs} \over m \} = 19.97... \cdot 10^{-6} \text{ V} \over m \} \quad \&= 19.97... \text{ V} \over m \} \quad \text{(to the right)}$

Similarly, we get for $\vec{F}_{02}$ and $\vec{F}_{03}$

$$\vec{F}_{02} = F_{02,x} \hat{x} = -28.09... \text{ V} \over m \} \quad \text{(to the right)}$$

$$\vec{F}_{03} = -22.47... \text{ V} \over m \} \quad \text{(to the top left)}$$

For $\vec{F}_{03}$, we have to calculate the x - and y -component.

This is possible, by using the angle α between the line through q_0 and q_3 and the positive x -axis (pointing to the right).

So, α has to be between 90° and 180° . It can be calculated by:

$$\alpha = \arctan\left(\frac{-4 \text{ cm}}{+2 \text{ cm}}\right) = \pi - 1.1071... = 180^\circ - 63.4...^\circ = 116.6...^\circ$$

Based on this, the x - and y -component is:

$$F_{03,x} = |\vec{F}_{03}| \cos \alpha = 10.05... \text{ V} \over m \} \quad \text{(to the left)}$$

$$F_{03,y} = |\vec{F}_{03}| \sin \alpha = 20.10... \text{ V} \over m \} \quad \text{(to the top)}$$

From:

<https://first.mexle.te.hs-heilbronn.de/> - MEXLE Wiki

Permanent link:

https://first.mexle.te.hs-heilbronn.de/electrical_engineering_and_electronics/task_dtoqvpvrbdtozfk_with_calculation

Last update: 2024/07/15 15:03

