

ws2022_exam_r

Student Group

First Name	Surname	Matrikel Nr.


Table of Contents

Exercise E7 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	2
Exercise E3 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	5
Exercise E11 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	6
Exercise E15 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	6
Exercise E13 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	9
Exercise E1 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	9
Exercise E9 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	10
Exercise E5 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	11

Exercise E7 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result


$$\begin{aligned} U_{\text{rs}} &= U_{\text{AB}} \quad \&= 4.5 \text{ V} \\ R_{\text{ri}} &= R_{\text{AB}} \quad \&= 6 \text{ } \Omega \end{aligned}$$

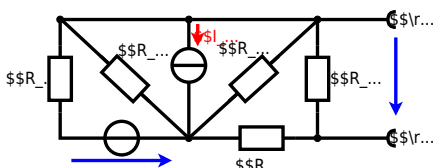


Calculated the internal resistance R_{ri} and the source voltage U_{rs} of an equivalent linear voltage source on the connectors A and B .
$$\begin{aligned} R_1 &= 5.0 \text{ } \Omega, \quad \& U_2 = 6.0 \text{ V}, \quad \& R_3 = 10 \text{ } \Omega, \quad \& I_4 = 4.2 \text{ A}, \quad \& \\ R_5 &= 10 \text{ } \Omega, \quad \& R_6 = 7.5 \text{ } \Omega, \quad \& R_7 = 15 \text{ } \Omega \quad \& \end{aligned}$$
 Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

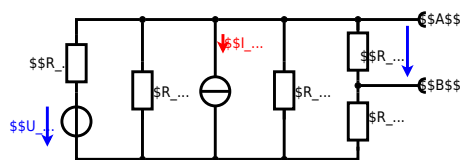

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

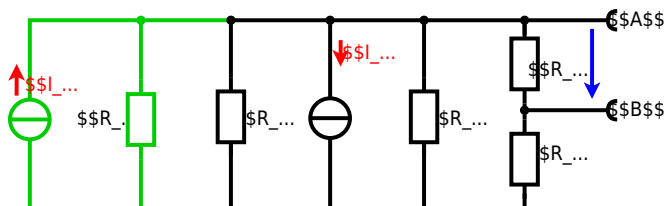

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :
$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$
 The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:
$$U_{24} = I_{24} \cdot R_{135}$$

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) \cdot \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 || R_3 || R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

Therefore the voltage between A and B is given as:

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 || R_3 || R_5} \right) \cdot \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 || R_3 || R_5$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance (ω), so a short-circuit:

$$R_{AB} = R_7 || (R_6 + R_1 || R_3 || R_5)$$

with $R_1 || R_3 || R_5 = 5 \Omega || 10 \Omega || 10 \Omega = 5 \Omega || 5 \Omega = 2.5 \Omega$:

$$U_{AB} = \left(\frac{6.0 \text{ V}}{5.0 \Omega} \right) - 4.2 \Omega \cdot \left(\frac{15 \Omega \cdot 2.5 \Omega}{7.5 \Omega + 15 \Omega + 2.5 \Omega} \right) || R_{AB} = 15 \Omega || (7.5 \Omega + 2.5 \Omega)$$

Exercise E3 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)

2. According to question 2, the effective resistance is not given, but can be identified. Result: $R_{eff} = 10 \Omega$ at $\omega = 25^\circ\text{C}$ for your answer.

Its temperature coefficients are: $\alpha = 0.01 \text{ K}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ K}^{-2}$

Result

The temperature inside the refrigeration system can reach down to -40°C .

$$R = 10 \Omega \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2)$$

The power transfer is reduced by a factor of 10 and 20% of the heat. Therefore, a solution is to let the heat flow up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$R = 10 \Omega \cdot (1 + 0.01 \cdot (-40^\circ\text{C} - 25^\circ\text{C}) + 71 \cdot 10^{-6} \cdot (-40^\circ\text{C} - 25^\circ\text{C})^2)$$

Exercise E11 Analyzing complex Impedances

(written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the complex impedance $\underline{Z}$ of the circuit shown in the figure. The components $\underline{R}$ and $\underline{X}_L$ shall be given.

After analysis, the full bridge circuit can be simplified to a series circuit. The equivalent circuit is shown in the figure. The complex impedance $\underline{Z}$ is given by:

.. Calculate the physical values of the two components.

Solution: $\underline{R} = 10 \Omega$, $\underline{X}_L = 10 \Omega$, $\underline{X}_C = 10 \Omega$, $\underline{X}_L = 10 \Omega$, $\underline{X}_C = 10 \Omega$

Solution

$$\underline{I} = \frac{\underline{U}}{\underline{Z}} = \frac{50 \text{ V}}{10 \Omega + j10 \Omega - j10 \Omega} = \frac{50 \text{ V}}{10 \Omega} = 5 \text{ A}$$

 The voltage across the inductor is $\underline{U}_L = \underline{I} \cdot \underline{X}_L = 5 \text{ A} \cdot j10 \Omega = j50 \text{ V}$
 The voltage across the capacitor is $\underline{U}_C = \underline{I} \cdot \underline{X}_C = 5 \text{ A} \cdot -j10 \Omega = -j50 \text{ V}$
 The voltage across the resistor is $\underline{U}_R = \underline{I} \cdot \underline{R} = 5 \text{ A} \cdot 10 \Omega = 50 \text{ V}$
 The phase angle φ is given by $\varphi = \arctan\left(\frac{\text{Im}(\underline{U})}{\text{Re}(\underline{U})}\right) = \arctan\left(\frac{0}{50}\right) = 0^\circ$
 The complex impedance $\underline{Z}$ is given by $\underline{Z} = \underline{R} + j(\underline{X}_L - \underline{X}_C) = 10 \Omega + j(10 \Omega - 10 \Omega) = 10 \Omega$
 The physical values of the two components are $R = 10 \Omega$ and $X_L = 10 \Omega$, $X_C = 10 \Omega$

Exercise E15 Complex Impedance Circuit

(written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the complex impedance $\underline{Z}$ of the circuit shown in the figure. The components $\underline{R}$ and $\underline{X}_L$ shall be given. The voltage source $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$ V is connected to a series circuit of an inductor of $330 \mu\text{H}$ and a capacitor of $0.22 \mu\text{F}$.

Solution: $\underline{Z} = 19.8 \Omega$, $\underline{X}_L = 19.8 \Omega$, $\underline{X}_C = 19.8 \Omega$

Result


.. Draw the equivalent circuit diagram of the bridge circuit. The components, voltages, and currents are given in the figure.

$$\underline{Z} = \frac{\underline{U}}{\underline{I}} = \frac{3.0 \text{ V}}{0.15 \text{ A}} = 20 \Omega$$

$$\underline{Z}_C = \frac{1}{j\omega C} = \frac{1}{j \cdot 2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6}} = -j19.8 \Omega$$

$$\underline{Z}_L = j\omega L = j \cdot 2\pi \cdot 15 \cdot 330 \cdot 10^{-6} = j19.8 \Omega$$

$$\underline{Z} = \underline{Z}_L + \underline{Z}_C = j19.8 \Omega - j19.8 \Omega = 0 \Omega$$

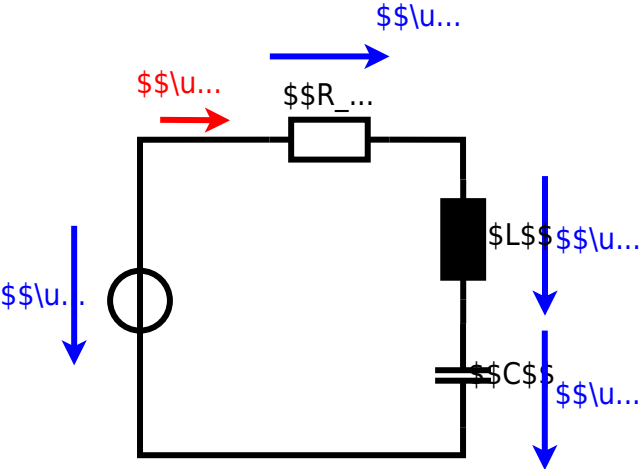

Exercise E13 Impedances at different Frequencies

(written test, approx. 18 % of a 60-minute written test, WS2022)

2. A series circuit consists of a resistor with $R_1 = 1.00 \text{ k}\Omega$ and a capacitor with $C_1 = 40 \text{ nF}$. The voltage across the resistor is $U_R = 10.0 \text{ V}$ at a frequency of $f = 4 \text{ MHz}$. Calculate the voltage across the capacitor U_C at the same frequency.

Solution

$$R_1 = 1.00 \text{ k}\Omega$$

$$C_1 = 40 \text{ nF}$$

A series circuit means that the current is constant on every component.

The equivalent impedance for R and C combined is given by

$$Z = \sqrt{R^2 + X_C^2}$$

Parallel circuit means that the voltage is the same on R and C . Since $U_R = 10.0 \text{ V}$ and $U_C = 10.0 \text{ V}$, the voltage across the combination is $U = 14.14 \text{ V}$.

Since $U_R = 10.0 \text{ V}$ and $U_C = 10.0 \text{ V}$, the voltage across the combination is $U = 14.14 \text{ V}$. The current I is the same through both components.

Therefore, the resulting current of the parallel circuit is given as:

$$I = \frac{U}{Z} = \frac{14.14 \text{ V}}{\sqrt{1.00^2 + 4.0^2} \text{ k}\Omega} = 3.54 \text{ mA}$$

This current I is the same through both components. The voltage across the capacitor is $U_C = I \cdot X_C = 14.14 \text{ V}$.

$$U_C = I \cdot X_C = 3.54 \text{ mA} \cdot 4.0 \text{ k}\Omega = 14.14 \text{ V}$$

Back to the first formula: $R_3 \cdot I_{3R} = X_{3C} \cdot I_{3C}$

$$R_3 = \frac{X_{3C} \cdot I_{3C}}{I_{3R}} = \frac{4.0 \text{ k}\Omega \cdot 3.54 \text{ mA}}{3.54 \text{ mA}} = 4.0 \text{ k}\Omega$$

$$R_3 = 4.0 \text{ k}\Omega$$

$$R_3 = 4.0 \text{ k}\Omega$$

Exercise E1 Resistance of a Wire by Resistivity

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A heating element made of nichrome wire with a diameter of $d = 0.5 \text{ mm}$ and a length of $L = 3 \text{ m}$ is used for heating. The power dissipation (= heat flow) of $P = 40 \text{ W}$ is necessary.

Calculate the current I through the heating element.

The Nichrome wire has a resistivity of $\rho = 1.10 \cdot 10^{-6} \text{ }\Omega \cdot \text{m}$.

The heating element is 3 m long and has a diameter of 0.5 mm .

Calculate the resistance R of the heating element.

Solution

$$P = U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}}$$

$$\sqrt{\frac{P}{R}} = \sqrt{\frac{40 \text{ W}}{0.33 \cdot \Omega}} \quad \text{align*}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \& \quad l = r^2 \cdot \pi = \\ \frac{1}{4} d^2 \cdot \pi \quad \& \quad R &= \rho \cdot \frac{4 \cdot l}{d^2 \cdot \pi} \quad \& \quad R = \\ 1.10 \cdot 10^{-6} \cdot \Omega \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \quad \& \quad \end{aligned}$$

Exercise E9 Charging Capacitors

(written test, approx. 16 % of a 60-minute written test, WS2022)


The circuit (without the light bulb) also is the circuit of Exercise 2. The voltage across the capacitor is again 0 V at the moment $t_0 = 0 \text{ s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2 = 1 \text{ ms}$ after closing the switch.

Solution To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

$$\Delta U = U \cdot \frac{R_2}{R_1 + R_2} = 12 \text{ V} \cdot \frac{20 \Omega}{20 \Omega + 20 \Omega} = 6 \text{ V}$$

Solution The ideal voltage source $\Delta U = 6 \text{ V}$ is in series with the resistor $R_1 = 20 \Omega$. The voltage $u_c(t)$ across the capacitor is independent of this series resistor.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting S_2 . R_1

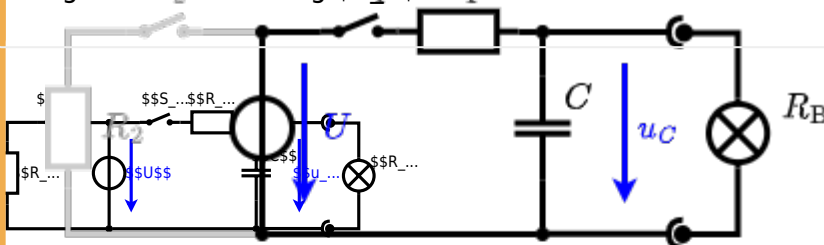


The circuit contains a voltage source $U = 12 \text{ V}$, a switch S_1 , a resistor of $R_1 = 20 \Omega$ and a capacitor of $C = 100 \mu\text{F}$.

The switch S_2 to an additional consumer R_2 will be considered to be open for the first tasks. At the moment $t_0 = 0 \text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0) = 0 \text{ V}$.

.. First do not consider the light bulb - it is not connected to the RC circuit.
 Calculate the point of time t_1 when $u_c(t_1) = 0.5 \cdot U$.

Solution

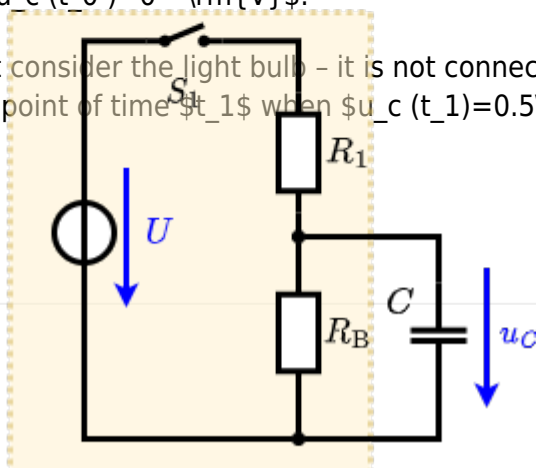

An equivalent linear voltage source can be given with U_s , R_1 , and R_B as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($= 0 \Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10 \Omega$$

$$u_c(t) = U_s \cdot (1 - e^{-t/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-t/(10 \Omega \cdot 100 \mu F)})$$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1) = 0.5 \cdot U$:
$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$
 It has to be rearranged to
$$(1 - e^{-t/\tau}) = 0.5$$

$$e^{-t/\tau} = 0.5 \quad \ln(0.5) = -t/\tau \quad t = \tau \cdot \ln(0.5) = R_1 \cdot C \cdot \ln(0.5)$$


Exercise E5 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be simplified with $R_1 = 200 \Omega$, $R_2 = R_3 = 150 \Omega$, $R_4 = 100 \Omega$ and the voltage $U = 10 \text{ V}$.
Result: R_B .

Solution

$$R_{\text{eq}} = 132.8 \Omega$$

Now a wye-delta transformation is necessary.

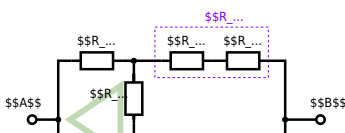

Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:


$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega)$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

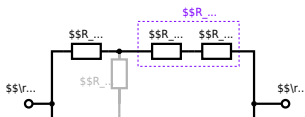

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = (R_2 + R_1 + R_1) \parallel (R_2 + R_2) \parallel (100 \, \Omega + 200 \, \Omega + 200 \, \Omega) \parallel (100 \, \Omega + 100 \, \Omega) \parallel (500 \, \Omega) \parallel (200 \, \Omega) \parallel R_{\text{eq}} = \left\{ \frac{500 \, \Omega \cdot 200 \, \Omega}{500 \, \Omega + 200 \, \Omega} \right\}$$

From:

<https://first.mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link:

https://first.mexle.te.hs-heilbronn.de/ee1/ws2022_exam_r

Last update: **2023/03/31 12:10**

