

Exam Winter Semester 2022

Student Group

First Name	Surname	Matrikel Nr.

Table of Contents

Exam Winter Semester 2022	2
Additional permitted Aids	2
Hits	2
Tasks	2
Exercise E2 Resistance of a Wire by Resistivity (written test, approx. 6 % of a 60-minute written test, WS2022)	2
Exercise E4 Temperature-dependent Resistance (written test, approx. 6 % of a 60-minute written test, WS2022)	2
Exercise E6 Pure Resistor Network Simplification (written test, approx. 13 % of a 60-minute written test, WS2022)	3
Exercise E8 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)	5
Exercise E10 Charging Capacitors (written test, approx. 16 % of a 60-minute written test, WS2022)	9
Exercise E12 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)	10
Exercise E14 Impedances at different Frequencies (written test, approx. 18 % of a 60-minute written test, WS2022)	11
Exercise E16 Complex Impedance Circuit (written test, approx. 15 % of a 60-minute written test, WS2022)	12

Exam Winter Semester 2022

Additional permitted Aids

- non-programmable calculator,
- formulary (2 DIN A4 pages)

Hits

- The duration of the exam is 60 min.
- Attempts to cheat will lead to exclusion and failure of the exam.
- Withdrawal is no longer possible after these exam has been handed out.
- Please write down intermediate calculations and results on the assignment sheet. (when more space is needed also on the reverse side. In this case: Mark it clearly).
- Always use units in the calculation.
- Use a document-proof, non-red pen.

Tasks

Exercise E2 Resistance of a Wire by Resistivity

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. Heating elements are used to heat water in a room and use of 180 W electric power dissipation (= heat flow) of $P=40 \text{ W}$ is necessary.

Calculate the current I needed to operate for heating elements.

The Nichrome wire has a resistivity of $1.10 \cdot 10^{-6} \text{ } \Omega \text{ m}$.

The heating element is 3 m long and has a diameter of 3.57 mm .

∴ Calculate the resistance R of the heating element.

Solution

$$\begin{aligned} P &= U \cdot I = R \cdot I^2 \quad \rightarrow \quad I = \sqrt{\frac{P}{R}} \\ \sqrt{\frac{P}{R}} &= \sqrt{\frac{40 \text{ W}}{0.33 \text{ } \Omega}} \end{aligned}$$

$$\begin{aligned} R &= \rho \cdot \frac{l}{A} \quad \& \quad A = r^2 \cdot \pi = \frac{1}{4} d^2 \cdot \pi \\ R &= \rho \cdot \frac{l}{\frac{1}{4} d^2 \cdot \pi} \quad \& \quad R = 1.10 \cdot 10^{-6} \text{ } \Omega \text{ m} \cdot \frac{4 \cdot 3 \text{ m}}{(3.57 \cdot 10^{-3} \text{ m})^2 \cdot \pi} \end{aligned}$$

Exercise E4 Temperature-dependent Resistance

(written test, approx. 6 % of a 60-minute written test, WS2022)

2. A heating element is used to heat water in a room and use of 180 W electric power dissipation (= heat flow) of $P=40 \text{ W}$ is necessary.

Resistance of system $R_{\text{eq}} = 10 \text{ k}\Omega$ at 25°C . Give an explanation for your answer.

Its temperature coefficients are: $\alpha = 0.01 \text{ } ^\circ\text{C}^{-1}$ and $\beta = 71 \cdot 10^{-6} \text{ } ^\circ\text{C}^{-2}$

Result

The temperature inside the refrigeration system can reach down to -40°C .

1. Calculate the resistance of the thermal conductance $\lambda = 10 \text{ W/(m}\cdot\text{K)}$.

The power transfer resistance R is a function of the current I and the heat Q . Therefore, a solution is to use the heat flow to heat up the refrigeration system.

Therefore, with constant U and increasing R the power decreases. Ten times more resistance decreases the heat flow to one-tenth.

$$\begin{aligned} R &= R_0 \cdot (1 + \alpha \cdot \Delta T + \beta \cdot \Delta T^2) \quad \& | \\ \text{with } \Delta T &= T_{\text{end}} - T_{\text{start}} \quad R = 10 \text{ k}\Omega \\ &= 10 \cdot (1 + 0.01 \cdot (-40 - 25) + 71 \cdot 10^{-6} \cdot (-40 - 25)^2) \end{aligned}$$

Exercise E6 Pure Resistor Network Simplification


(written test, approx. 13 % of a 60-minute written test, WS2022)

The following shall be solved with $R_1 = 20 \text{ }\Omega$, $R_2 = 10 \text{ }\Omega$, $R_3 = 10 \text{ }\Omega$, $R_4 = 10 \text{ }\Omega$, and $R_5 = 10 \text{ }\Omega$.
Result: $R_{\text{eq}} = 13.8 \text{ }\Omega$.

Solution

$$R_{\text{eq}} = 13.8 \text{ }\Omega$$

Now a wye-delta transformation is necessary.

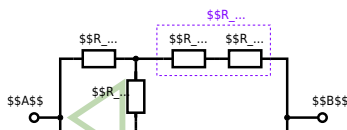


Since $R_2 = R_3$ and based on the equations for the transformation, the transformed R_Y is given as:
$$R_Y = \frac{R_2 \cdot R_2}{R_2 + R_2 + R_2} = \frac{(100 \, \Omega)^2}{3 \cdot 100 \, \Omega} = \frac{1}{3} \cdot 100 \, \Omega = 33.33 \, \Omega$$

The equivalent resistor is given by a parallel configuration of resistors in series:

$$R_{\text{eq}} = R_Y + (R_Y + R_1 + R_1) \parallel (R_Y + R_2) \parallel R_{\text{eq}} = 33.33 \, \Omega + (33.33 \, \Omega + 400 \, \Omega) \parallel (33.33 \, \Omega + 100 \, \Omega) \parallel$$

1. The switch shall now be open. Calculate the equivalent resistance R_{eq} between A and B .

Solution

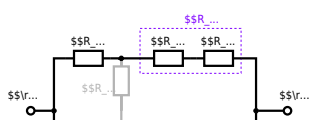


The equivalent resistor is given by a parallel configuration of resistors in series:

$$\begin{aligned} R_{\text{eq}} &= (R_2 + R_1 || R_3) || R_4 \\ R_{\text{eq}} &= (100 \, \Omega + 200 \, \Omega || 200 \, \Omega) || (100 \, \Omega + 100 \, \Omega) \\ R_{\text{eq}} &= (500 \, \Omega) || (200 \, \Omega) \\ R_{\text{eq}} &= \frac{500 \, \Omega \cdot 200 \, \Omega}{500 \, \Omega + 200 \, \Omega} \end{aligned}$$

Exercise E8 Equivalent linear Source (written test, approx. 14 % of a 60-minute written test, WS2022)

The circuit in the following has to be simplified.
Result


$$\begin{aligned} U_s &= U_{\text{AB}} = 4.5 \, \text{V} \\ R_i &= R_{\text{AB}} = 6 \, \Omega \end{aligned}$$

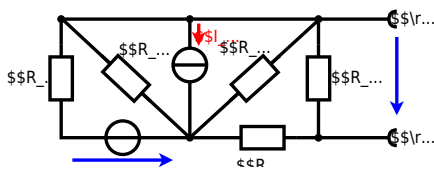


Calculate the internal resistance R_i and the source voltage U_s of an equivalent linear voltage source on the connectors A and B. $R_1=5.0 \, \Omega$, $U_2=6.0 \, \text{V}$, $R_3=10 \, \Omega$, $I_4=4.2 \, \text{A}$, $R_5=10 \, \Omega$, $R_6=7.5 \, \Omega$, $R_7=15 \, \Omega$ Use equivalent sources in order to simplify the circuit!

Solution

The best thing is to re-think the wiring like rubber bands and adjust them:

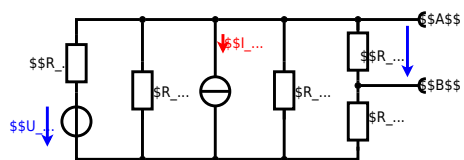

The linear voltage source of U_2 and R_1 can be transformed into a current source $I_2 = \frac{U_2}{R_1}$ and R_1 :

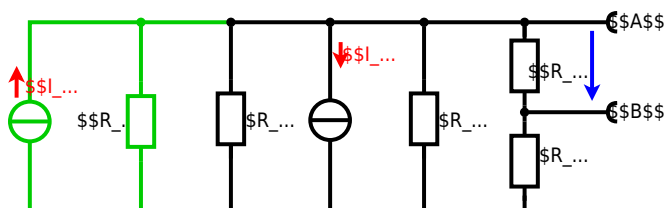

Now a lot of them can be combined. The resistors R_1 , R_3 , R_5 are in parallel, like also I_2 and I_4 :

$$R_{135} = R_1 || R_3 || R_5$$

$$I_{24} = I_2 - I_4 = \frac{U_2}{R_1} - I_4$$

The resulting circuit can again be transformed:



Here, the U_{24} is calculated by I_{24} as the following:

$$U_{24} = I_{24} \cdot R_{135}$$

$$U_{AB} = U_{24} \cdot \left(\frac{U_2}{R_1} - I_4 \right) \cdot R_1 \parallel R_3 \parallel R_5$$

On the right side of the last circuit, there is a voltage divider given by R_{135} , R_6 , and R_7 .

$$U_{AB} = U_{24} \cdot \left(\frac{R_7}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5} \right) \cdot \left(\frac{U_2}{R_1} - I_4 \right) \cdot \frac{R_7 \cdot R_1 \parallel R_3 \parallel R_5}{R_6 + R_7 + R_1 \parallel R_3 \parallel R_5}$$

For the internal resistance R_i the ideal voltage source is substituted by its resistance ($=0\Omega$, so a short-circuit):

$$R_{AB} = R_7 \parallel (R_6 + R_1 \parallel R_3 \parallel R_5)$$

with $R_1 \parallel R_3 \parallel R_5 = 5\Omega \parallel 10\Omega \parallel 10\Omega = 5\Omega \parallel 5\Omega = 2.5\Omega$:

$$U_{AB} = \left(\frac{6.0\text{V}}{5.0\Omega} - 4.2\text{A} \right) \cdot \frac{15\Omega \cdot 2.5\Omega}{7.5\Omega + 15\Omega + 2.5\Omega} \parallel R_{AB} = 15\Omega \parallel (7.5\Omega + 2.5\Omega)$$

Exercise E10 Charging Capacitors


(written test, approx. 16 % of a 60-minute written test, WS2022)

The circuit below is a simplified model of a circuit for charging a capacitor. The voltage across the capacitor is again 0V at the moment $t_0=0\text{s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2=1\text{ms}$ after closing the switch.


Hint: To solve this, first create an equivalent linear voltage source from U , R_1 , and R_2 .

Solution: The circuit can be simplified to a linear voltage source U_{eq} in series with an internal resistance R_{eq} . The voltage across the capacitor is again 0V at the moment $t_0=0\text{s}$ when the switch S_1 is closed. Calculate the voltage $u_c(t_2)$ across the capacitor at $t_2=1\text{ms}$ after closing the switch.

On an alternative view, one can try to create an equivalent linear voltage source again. Then, the internal resistance is given by substituting the ideal voltage source is again short-circuiting R_2 .

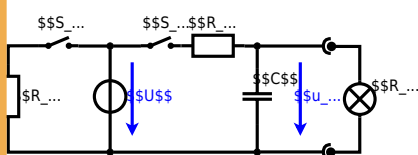


The circuit contains a voltage source $U=12\text{ V}$, a switch S_1 , a resistor of $R_1=20\text{ }\Omega$ and a capacitor of $C=100\text{ }\mu\text{F}$. The switch S_2 to an additional consumer R_2 will be considered to be open for the first task. At the moment $t_0=0\text{ s}$ the switch S_1 is closed, the voltage across the capacitor is $u_c(t_0)=0\text{ V}$.

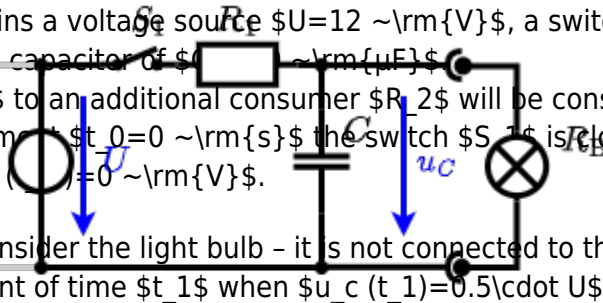

First do not consider the light bulb - it is not connected to the RC circuit. Calculate the point of time t_1 when $u_c(t_1)=0.5 \cdot U$.

Solution

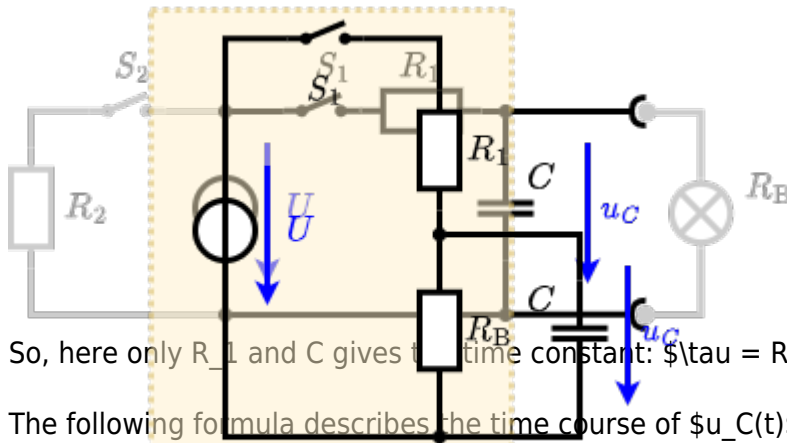

So, here only R_1 and C gives the time constant: $\tau = R_1 \cdot C$

The following formula describes the time course of $u_c(t)$ which has to be $u_c(t_1)=0.5 \cdot U$:

$$u_c(t) = U \cdot (1 - e^{-t/\tau}) = 0.5 \cdot U$$

It has to be rearranged to $(1 - e^{-t/\tau}) = 0.5$. An equivalent linear voltage source can be given with $U_s = U \cdot \frac{R_1}{R_1 + R_B}$ and $R_i = R_1 \parallel R_B$ as seen in yellow.

Therefore, the voltage of the equivalent linear voltage source is: $U_s = U \cdot \frac{R_B}{R_1 + R_B} = \frac{1}{2} \cdot U$. The internal resistance is given by substituting the ideal voltage source with its resistance ($=0\text{ }\Omega$, short-circuit).

$$R_i = R_1 \parallel R_B = 10\text{ }\Omega$$

$$u_c(t_2) = U_s \cdot (1 - e^{-t_2/(R_i \cdot C)}) = \frac{1}{2} \cdot U \cdot (1 - e^{-1\text{ ms}/(10\text{ }\Omega \cdot 100\text{ }\mu\text{F})})$$

Exercise E12 Analyzing complex Impedances (written test, approx. 14 % of a 60-minute written test, WS2022)

2. Calculate the phasor voltage $\underline{u}_C(\omega)$ at $\omega = 100\text{ rad/s}$ if $\underline{u}_C(0) = 0$ through the components (R and X_1) shall be given.

After analysis, the full dimensioned time impedance has been extracted and given in phasor notation: $\underline{Z} = (2 + j2) \text{ }\Omega$ and $\underline{Z}_1 = (4 - j5) \text{ }\Omega$.

Solution

Calculate the physical values of the two components.

Solution:

$$R_1 = 1.00 \, \Omega$$

$$R_2 = 10.0 \, \Omega$$

$$C_1 = 40 \, \text{nF}$$

$$C_2 = 4.7 \, \mu\text{F}$$

$$f = 450 \, \text{kHz}$$

$$U = 10 \, \text{V}$$

$$I = 60 \, \text{mA}$$

$$Z = \frac{U}{I} = \frac{10 \, \text{V}}{0.06 \, \text{A}} = 166.67 \, \Omega$$

$$Z = \sqrt{R^2 + X^2}$$

$$X_L = \omega L = 2\pi f L = 2\pi \cdot 450 \cdot 10^3 \cdot 4.7 \cdot 10^{-6} = 13.35 \, \Omega$$

$$X_C = \frac{1}{\omega C} = \frac{1}{2\pi f C} = \frac{1}{2\pi \cdot 450 \cdot 10^3 \cdot 40 \cdot 10^{-9}} = -0.884 \, \Omega$$

$$X = X_L - X_C = 13.35 - (-0.884) = 14.234 \, \Omega$$

$$R = \sqrt{Z^2 - X^2} = \sqrt{166.67^2 - 14.234^2} = 166.1 \, \Omega$$

$$R_3 = 166.1 \, \Omega$$

The phase φ can be calculated as

$$\varphi = \arctan\left(\frac{X}{R}\right) = \arctan\left(\frac{14.234}{166.1}\right) = 4.86^\circ$$

Exercise E14 Impedances at different Frequencies

(written test, approx. 18 % of a 60-minute written test, WS2022)

A series circuit has three distinct values $\omega = 2\pi f$ at which the voltage across the AC components is 35 V.

Result: $\omega = 2\pi f = 450 \, \text{kHz}$ high impedance at $\omega = 50 \, \text{Hz}$ and $\omega = 100 \, \text{Hz}$ through R_1 resistor R_1 shall have the same absolute value of the impedance as a capacitor $C_1 = 40 \, \text{nF}$ at $f = 4 \, \text{MHz}$.

Solution

$R_1 = 1.00 \, \Omega$

$R_2 = 10.0 \, \Omega$

A series circuit means that the current is constant on every component.

The equivalent impedance for R and L combined is given by

Parallel circuit means that the voltage is the same on R_2 and C_2

$$Z = \sqrt{R_2^2 + X_{C2}^2} = \sqrt{R_2^2 + \left(\frac{1}{\omega C_2}\right)^2}$$

$X_{C2} = \frac{1}{\omega C_2} = \frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot 40 \cdot 10^{-9}} = 0.995 \, \Omega$

$Z = \sqrt{R_2^2 + X_{C2}^2} = \sqrt{10.0^2 + 0.995^2} = 10.05 \, \Omega$

Therefore, the resulting current of the parallel circuit is given as:

$I = \frac{U}{Z} = \frac{35 \, \text{V}}{10.05 \, \Omega} = 3.48 \, \text{A}$

Back to the first formula:

$R_3 \cdot I = X_{C3} \cdot I$

$R_3 = X_{C3} = \frac{1}{\omega C_3} = \frac{1}{2\pi \cdot 4 \cdot 10^6 \cdot C_3}$

$C_3 = \frac{1}{2\pi \cdot R_3 \cdot f} = \frac{1}{2\pi \cdot 10.05 \, \Omega \cdot 4 \cdot 10^6} = 3.98 \, \text{nF}$

Exercise E16 Complex Impedance Circuit

(written test, approx. 15 % of a 60-minute written test, WS2022)

2. Calculate the complex impedance Z of the circuit shown in the figure. The voltage source is $u(t) = 3.0 \cdot \sin(2\pi \cdot 15 \cdot t)$ V. The inductor has an inductance of $L = 330 \mu\text{H}$ and the capacitor has a capacitance of $C = 0.22 \mu\text{F}$.

This linear source is connected with an inductor of $330 \mu\text{H}$ and a capacitor of $0.22 \mu\text{F}$, all in series.

Result

.. $Z = 19.8 \cdot 10^{-3} \Omega$ (or $19.8 \text{ m}\Omega$)

Label all components, voltages, and currents.

$Z = \frac{\hat{U}}{\hat{I}}$ and $\hat{I} = \frac{\hat{U}}{Z}$

$Z_C = \frac{1}{j\omega C}$ and $\omega = 2\pi \cdot 15 \text{ kHz}$

Result $\omega = 2\pi \cdot 15 \text{ kHz} \cdot 0.22 \mu\text{F}$

With $\omega = 2\pi \cdot 15 \text{ kHz}$ and $C = 0.22 \mu\text{F}$

$Z_C = \frac{1}{j\omega C} = \frac{1}{j \cdot 2\pi \cdot 15 \cdot 0.22 \cdot 10^{-6}}$

$Z_C = -j \cdot 19.8 \cdot 10^{-3} \Omega$


$Z_L = j\omega L = j \cdot 2\pi \cdot 15 \cdot 330 \cdot 10^{-6}$

$Z_L = j \cdot 3.14 \cdot 10^{-3} \Omega$

$Z = Z_L + Z_C = j \cdot 3.14 \cdot 10^{-3} - j \cdot 19.8 \cdot 10^{-3} = -j \cdot 16.66 \cdot 10^{-3} \Omega$

$|Z| = \sqrt{R^2 + (Z_L - Z_C)^2} = \sqrt{0 + (3.14 - 19.8)^2 \cdot 10^{-6}} = 16.66 \cdot 10^{-3} \Omega$

□ □ □ □ □ 100%

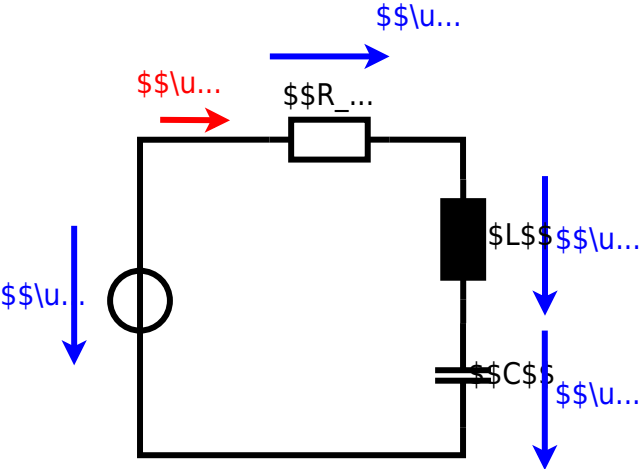

From:
<https://first.mexle.te.hs-heilbronn.de/> - **MEXLE Wiki**

Permanent link:
https://first.mexle.te.hs-heilbronn.de/electrical_engineering_and_electronics_1/ws2022_exam?rev=1768171359

Last update: **2026/01/11 23:42**

